

Turbo HD DVR V3.5.22 Build170927 Release Notes (2017-09-30)

	Firmware Version:	V3.5.22 Build170927		
	SDK Version:	V5.2.7.30 build20170428		
Firmware	Play Library (PlayCtrl.dll)	7.3.2.0		
Basic Information	player	4.8mini		
	Web version	V4.0.1 build 170419		
	Client version	V2.5.8.101 build20170426		

Reason of Upgrade

Regarding customers' usage habit and market new demand of PoC functions, Add some new functions, modify some functions, enhance products quality and meet customers' requirements.

Main Features

- i. Update of PoC connection Capacity
 - 1. Enhance the max PoC connection capacity from all channels AF to all channels AT cameras.


Device	Past	Now
4-ch device	Support 4-ch AF cameras Support 4-ch AT cameras	
8-ch device	Support 8-ch AF cameras	Support 8-ch AT cameras
16-ch device	Support 16-ch AF cameras Support 8-ch AT +8-ch AF ca	
		Or up to 12-ch AT access

For 16-ch device, support hybrid access of AT and AF camera as followings:

AT camera access	12	11	10	9	8	N (0~7)
AF camera access	0	2	4	6	8	16-N

2. Newly support prompt on live view when there are not enough power supply for PoC cameras connected



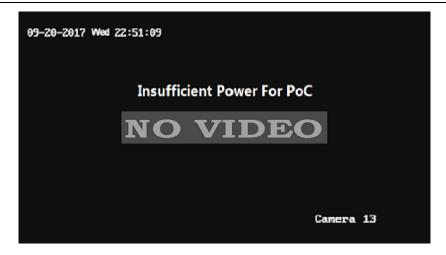

ii. Other functions modified



Related product list:

	DS-7108HQHI-K1
	DS-7204HQHI-K1
	DS-7208HQHI-K1、DS-7208HQHI-K2
K Series Turbo HD	DS-7216HQHI-K1、DS-7216HQHI-K2
DVR	DS-7204HQHI-K1/P、DS-7208HQHI-K2/P、DS-7216HQHI-K2/P
	DS-7204HUHI-K1、DS-7204HUHI-K2、DS-7208HUHI-K1、DS-7208HUHI-K2、DS-7216HUHI-K2
	DS-7204HUHI-K1/P、DS-7208HUHI-K2/P
	DS-7304HQHI-K4、DS-7308HQHI-K4、DS-7316HQHI-K4

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support team.

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.

Hikvision Digital Technology CO., Ltd.

No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Tel: +86-571-8807-5998 FAX: +86-571-8993-5635

Email: support@hikvision.com