

Angepasste DACH Modular Intercom Firmware

V2.2.58_221227 Release Notes

(2023-01-10)


Device Model	DS-KD8003-IME1 (B), DS-KD8003-IME2 (B)
Firmware Version	Modular Door Station: V2.2.58_221227
iVMS-4200 Version	V3.8.1.4
Hik-Connect APP	Neueste Version

Hinweise

Diese angepasste Firmware basiert auf der Baseline Firmware V2.2.58_220725 für die B-Version der Türstation DS-KD8003(B). Neben den DACH exklusiven Funktionen (siehe unten) werden Funktionen wie Web-Browser Zugriff und frei programmierbare Relais-Schaltung für öffentliche Passwörter unterstützt.

Änderungen in der DACH-Version

1. Der Alarm Eingang 1-4 kann für den Anschluss an externe Türklingeln verwendet werden.

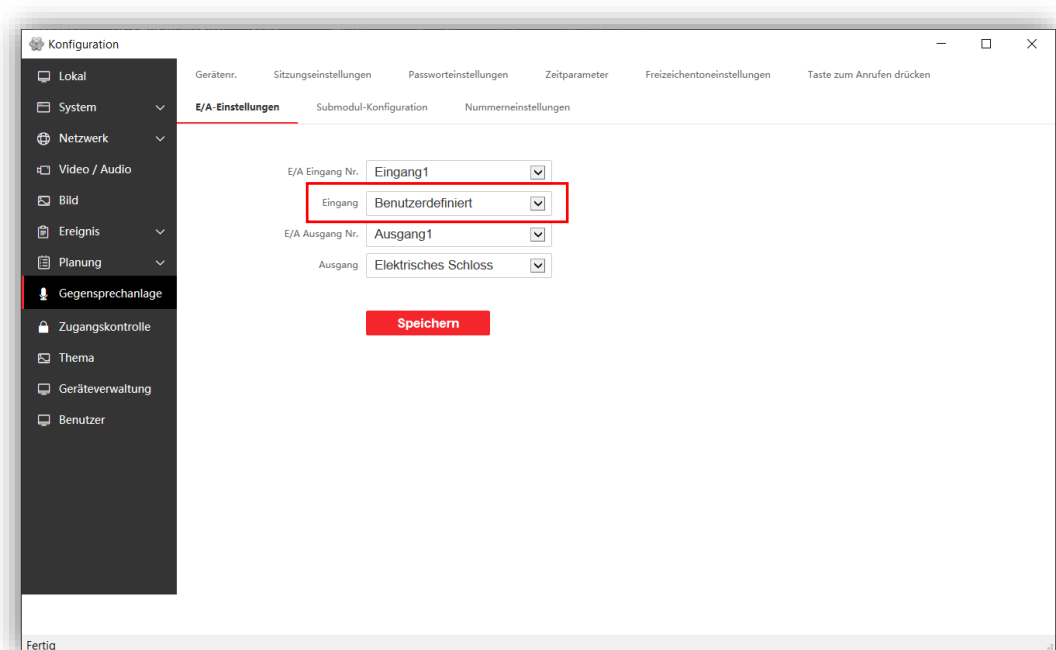

- Wählen Sie im Menüpunkt E/A-Einstellungen den Wert **Benutzerdefiniert** für die **E/A Eingang Nr. 1-4**

- Speichern Sie die Einstellungen

Hinweis: Die Eingänge A1-A4 sind fix den Zimmernummern 1-4 für Innenstationen zugeordnet.

2. Standbild JPG-URL für Bildabgriff von SIP-Telefonen hinzugefügt
 - <http://admin:pass@xxx.xxx.xxx.xxx/ISAPI/Streaming/channels/1/picture>
3. Integration des Fritz!Box SIP-Servers zur Anrufweiterleitung an angeschlossene SIP-Telefone in der Fritz!box hinzugefügt (siehe Anleitung Fritz!Box SIP-Integration im Download-Ordner).
4. Unterstützung von bis zu 10 Neben-Innenstationen hinzugefügt (setzt Innenstations-Firmware v.2.1.60_220916 voraus)

Hinweis: Ist auf Ihrer Innenstationen bereits eine Firmware V2.2.x installiert, benötigen Sie die Downgrade-Firmware V2.2.2_build221229, um Ihre Innenstationen auf V2.1.60_220916 zu programmieren.

Angepasste DACH Indoor Station Firmware

V2.1.60_220916 Release Notes

(2022-10-19)

Device Model	Linux based indoor stations: DS-KH63xx, DS-KH8350, KH8520
Firmware Version	Modular Door Station: V2.1.60_220916
iVMS-4200 Version	V3.8.1.4
Hik-Connect APP	Neueste Version

Hinweise

Diese angepasste Firmware basiert auf der Baseline Firmware V2.1.60_220815, welche Unterstützung für statische Wi-Fi IP-Adressen, Zeitzone Konfiguration und weitere Verbesserungen von der Build-Version 220815 (und Vorgängerversionen) beinhaltet.

Änderungen in der DACH-Version

1. Unterstützung von bis zu 10 Neben-Innenstationen pro Haupt-Innenstation hinzugefügt (setzt Firmware V.2.2.58_221227 für modulare Türstation voraus).

Custom DACH Modular Intercom Firmware

V2.2.58_221227 Release Note

(2023-01-10)


Device Model	DS-KD8003-IME1 (B), DS-KD8003-IME2 (B)
Firmware Version	Modular Door Station: V2.2.58_221227
iVMS-4200 Version	V3.8.1.4
Hik-Connect APP	Latest version

Notes

This customized firmware is based on the baseline firmware V2.2.58_220725 for the B-Version of the DS-KD8003(B) door station. Besides the DACH exclusive features (see below), functions like web browser access and free programmable relay switching for public passwords are supported.

Custom changes for DACH

1. Alarm Input 1-4 can be assigned as “door bell” to connect existing wired door bell buttons for intercom application.

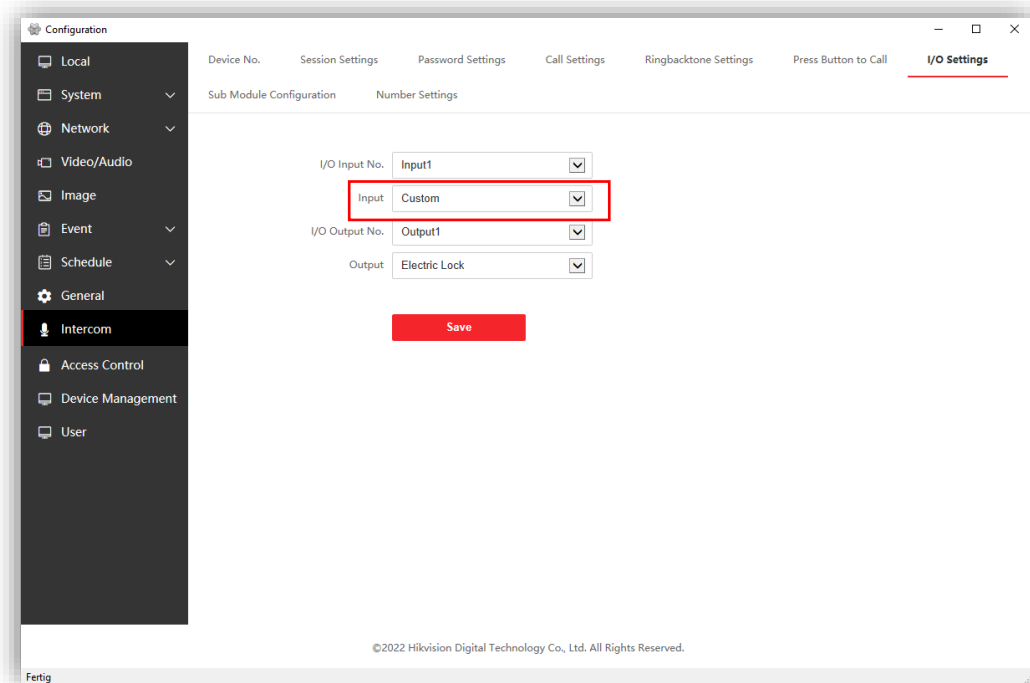

- Select Input type “Custom” to connect existing door bell
- Save setting

Note: Inputs A1-A4 are permanently assigned to room numbers 1-4 for indoor stations.

2. Added single JPG-URL to capture still pictures for SIP-Phones
 - <http://admin:pass@xxx.xxx.xxx.xxx/ISAPI/Streaming/channels/1/picture>
3. Integration of Fritz!Box SIP-Server to support calling connected SIP-Phones in Fritz!box-Router (please see setup manual Fritz!Box SIP-Integration within download folder).
4. Added support to connect up to 10 indoor stations (requires indoor station firmware v.2.1.60_220916)

Note: If firmware V2.2.x is already installed on your indoor stations, you need the downgrade firmware V2.2.2_build221229 to program your indoor stations to V2.1.60_220916.

Custom DACH Indoor Station Firmware

V2.1.60_220916 Release Notes

(2022-10-19)

Device Model	Linux based indoor stations: DS-KH63xx, DS-KH8350, KH8520
Firmware Version	Modular Door Station: V2.1.60_220916
iVMS-4200 Version	V3.8.1.4
Hik-Connect APP	Latest version

Notes

This custom firmware is based on baseline firmware V2.1.60_220815 that includes support for static IP for Wi-Fi, time zone configuration, support and general firmware optimizations introduced in build 220815 (and previous versions).

Custom changes for DACH

1. Added support to add up to 10 sub indoor stations to one main indoor station. (requires door station with firmware v.2.2.58_221227).