



EUROPEAN TECHNICAL CENTER

FIRMWARE RELEASE NOTE

2nd Generation IP Video Intercom



2nd Gen IP Video Intercom Build 190604 Release Notes


Supported Models	Firmware Version	Indoor Station: V2.0.2build190604 Door Station: V2.0.6build190604
DS-KH8350 Series DS-KH6320 Series DS-KH8520 Series DS-KD8003-IME1	SDK Version	HCNetSDK V6.0.0.25_build20181220
	iVMS4200 Version	V3.1.1.6 Build 190712
	Hik-Connect APP	3.7.3.190115 or later

Reason of Upgrade

Added or modified functions, enhance products quality and meet customers' requirements

New Features

- Supports 15 languages:** English, French, Portuguese, Spanish, German, Italian, Polish, Hungarian, Dutch, Romanian, Bulgarian, Czech, Greek, Croatian, Serbian;
- Support display module KD-DIS. Required firmware version:**
 (1) Display Module: VIS_8M_14_E3_EN_STD_V1.0.0_190520
 (2) Keypad and Other Sub Module: ACS_DS_KD_XX_GML_GM_V1.0.0_build190522
- Support enrolling cards form door station reader module on iVMS-4200.**
 [1] The iVMS user needs to be linked with room number in order to be displayed on the KD-DIS display module residents list and unlock the door as resident.
 [2] If the user is not linked with room number it will be treated as visitor which can only unlock the door.

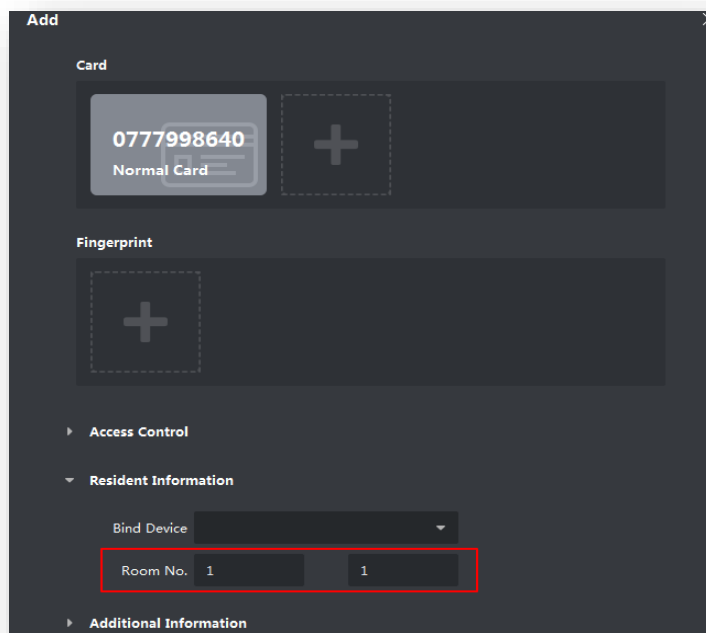


Modified Features

1. Starting for this version the device will check if the upgrading firmware is correct and refuse incorrect versions. Downgrading to version older than this one (190604) will be refused by iVMS and can be done only via serial port upgrade.

2. Modified some improper translations

3. Supports sub modules upgrading from iVMS

All sub modules produced after May 2019 and with FW 190522 can be upgraded via iVMS V3.1.1.6 Build 190702 and later. Older modules need to be upgraded to 190522 fw via serial port upgrade to support this feature.

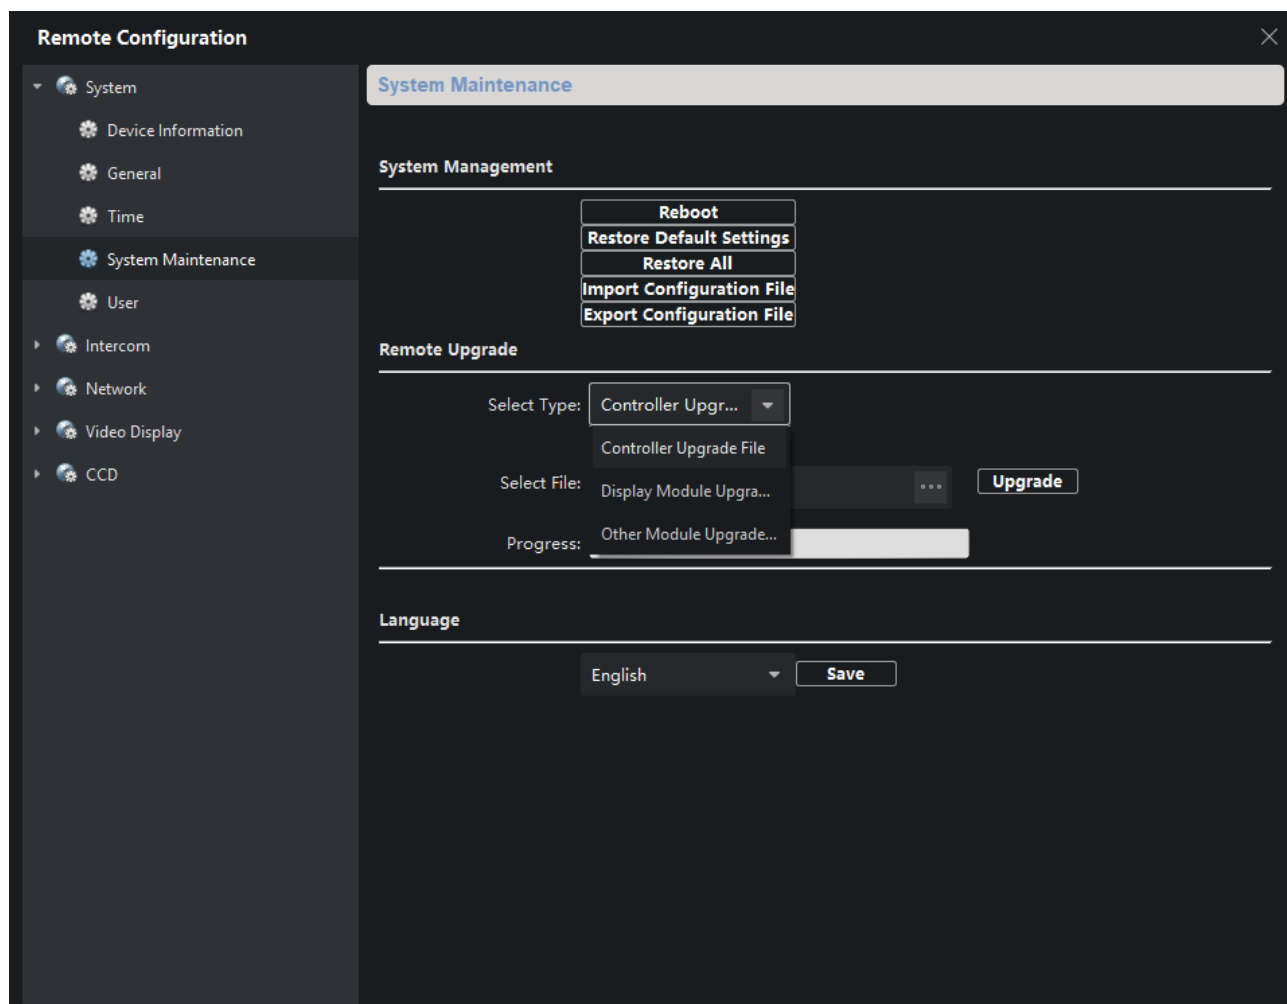

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you for the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support team.



Note:

Hikvision has all rights to alter, modify and cancel this notice.

Hikvision doesn't give any guarantee for old models' stock.

Hikvision is not liable for any typing or printing errors.

For special model's change details, please contact our local technical support team.

Hikvision Digital Technology CO., Ltd.
No. 555 Qianmo Road, Binjiang District, Hangzhou
310052, China
Tel: +86-571-8807-5998
FAX: +86-571-8993-5635