



**How to configure Door Station and Indoor extension  
on Indoor Station (Local Interface)**

<b>Title:</b>	How to configure Door Station and Indoor extension on Indoor Station (Local Interface)	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	1 of 3

## Preparation

1. This guide takes

Type	Model	Version
Indoor station*2	DS-KH6320-WTE1	V2.1.10_200713
Indoor station	DS-KV8413-WTE1(B)	V2.1.10_2000805


As examples to introduce set up indoor extension and door station on main indoor station

2. Software: iVMS-4200 Version 3.4.0.9


## How to configure Door Station and Indoor extension on Indoor Station (Local Interface)

### 1. Activate the Indoor station device

- 1) Power on the main door station device and create the **password** for **active**.

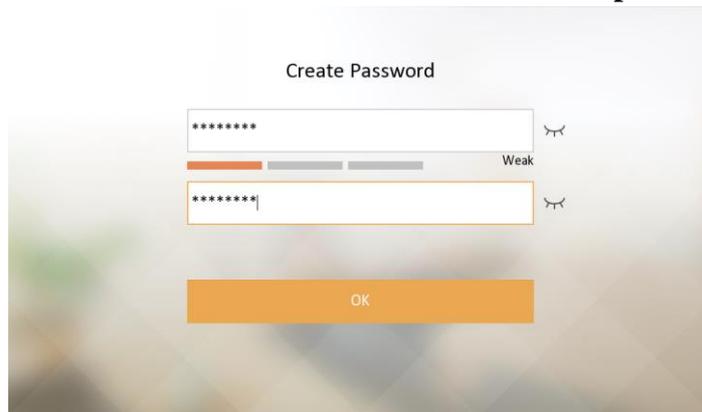

- 1) Go on with the Wizard, select aimed **language** and set the **IP address, subnet mask and gateway**.

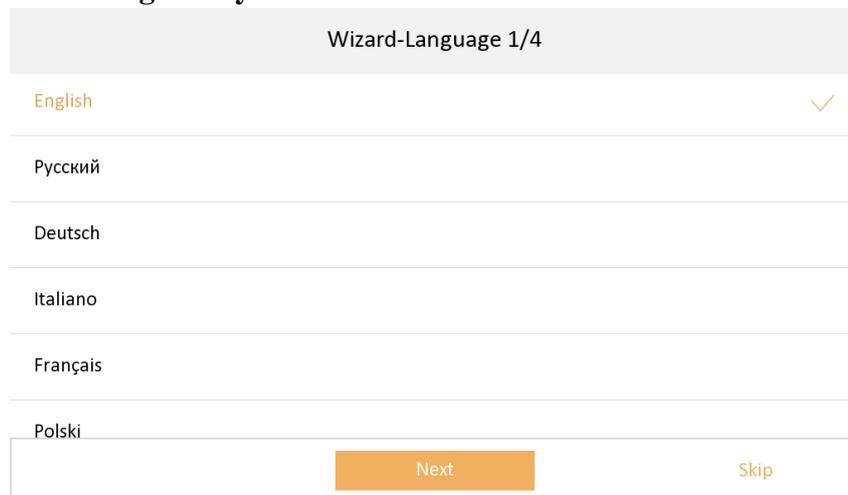

<b>Title:</b>	How to configure Door Station and Indoor extension on Indoor Station (Local Interface)	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	2 of 5

Wizard-Network 2/4

🌐 DHCP

Local IP	10.9.96.10
Subnet Mask	255.255.255.0
Gateway	10.9.96.254

Previous
Next
Skip

## 2. Set a register password

- 1) Go to **SIP password**, input a **register password** and save the settings.

Wizard-Settings 3/4

🗨 Indoor Station Type
Indoor Station >

Room No.		1
SIP Password	<div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">           SIP register password            *****         </div> <div style="border: 1px solid #ccc; padding: 5px;">           *****         </div>	Weak >

Cancel
OK

Advanced Settings		>
Indoor Extension Settings	<input type="checkbox"/>	

Previous
Next
Skip

## 3. Add indoor extension to main Indoor Station

- 1) Enable **Indoor extension** and go to **Link indoor station**.

Wizard-Settings 3/4


🗨 Indoor Station Type
Indoor Station >

SIP Password		Configured >
Advanced Settings		>
Indoor Extension Settings	1 <input checked="" type="checkbox"/>	
Link Indoor Stations	2	>


Previous
Next
Skip

<b>Title:</b>	How to configure Door Station and Indoor extension on Indoor Station (Local Interface)	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	3 of 5

- 2) You can see the indoor station under the same network on this page. Select the aimed station and **activate** the device.

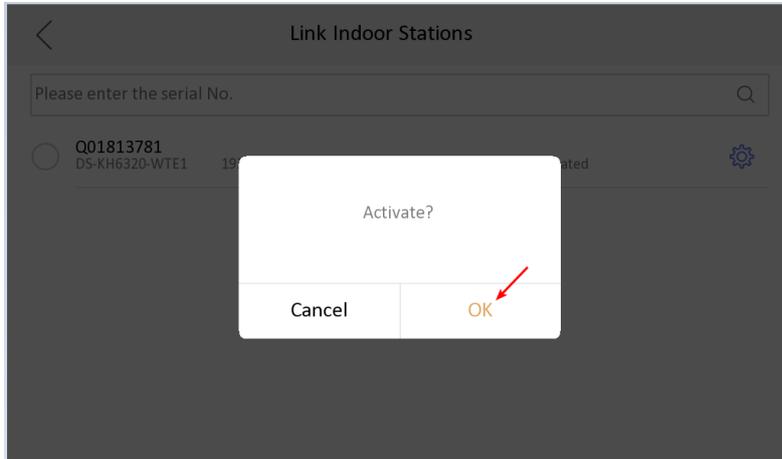


- 3) Change the Network Setting and enter OK.

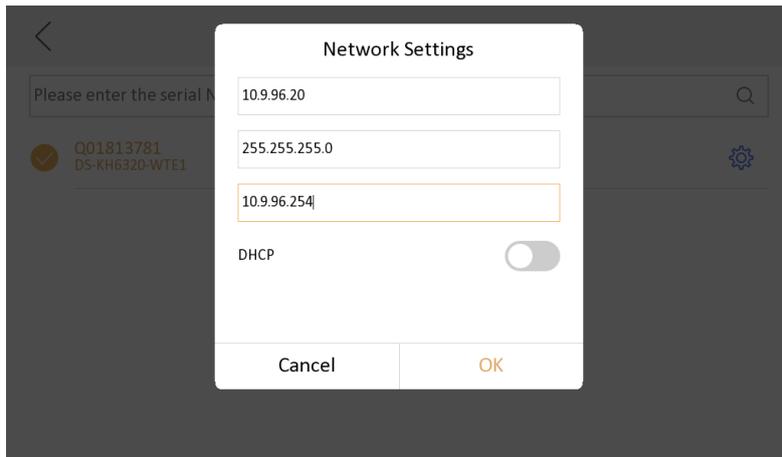


#### 4. Configure the Door Station to Indoor Station

- 1) Choose the Door Station, DS-KV8413-WME1, enter OK.

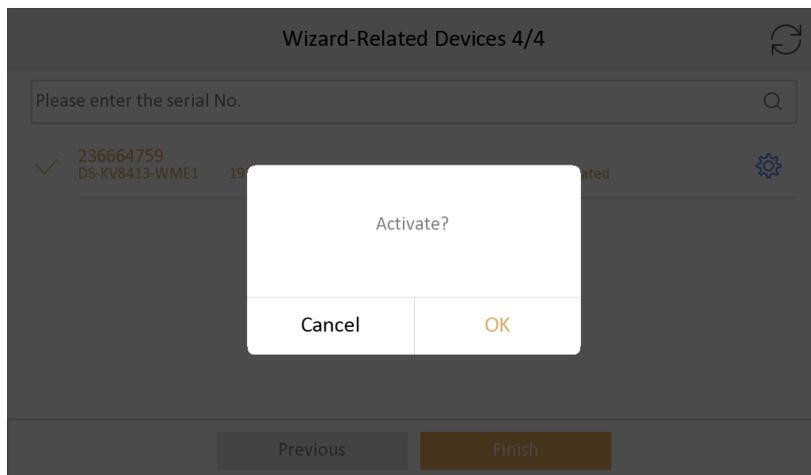


<b>Title:</b>	How to configure Door Station and Indoor extension on Indoor Station (Local Interface)	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	4 of 5

2) Change the **Network Setting** and enter **OK**.

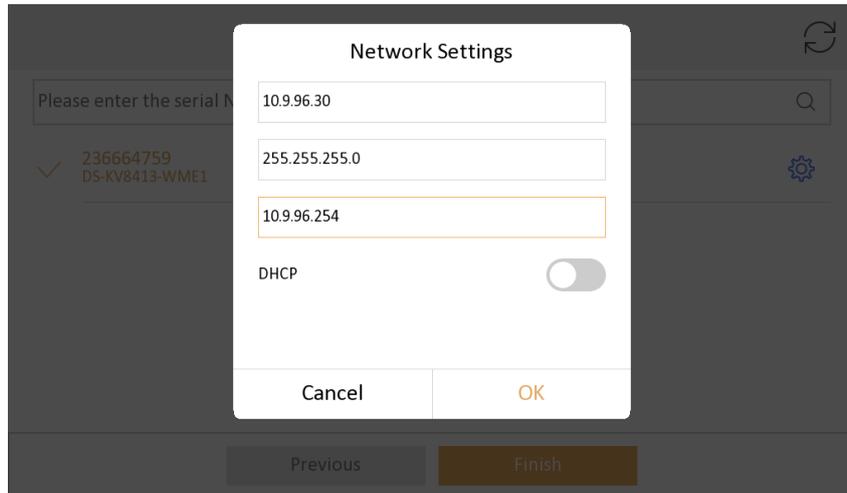


3) Choose **Finish** and test the indoor extension function.

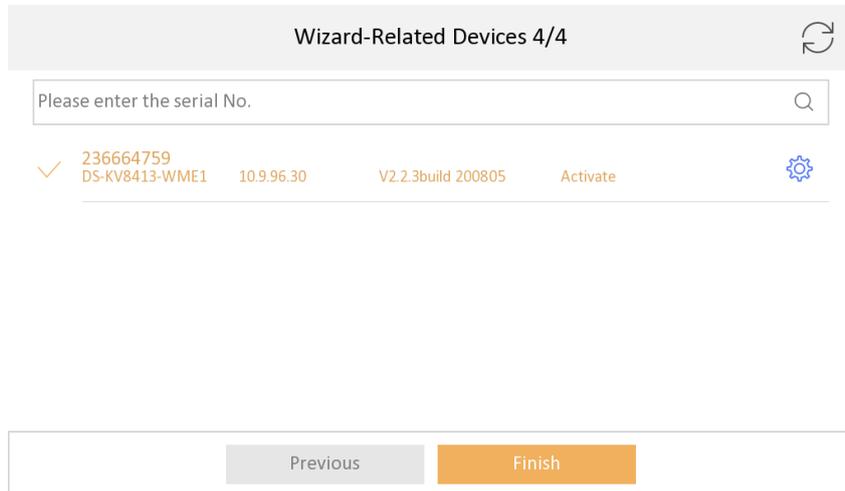

## 5. Dial Indoor Station

1) Press indoor extension dial number, Home Page > Phone Icon > Call Resident. Then Call 0-0. The indoor station will receive the call successfully.

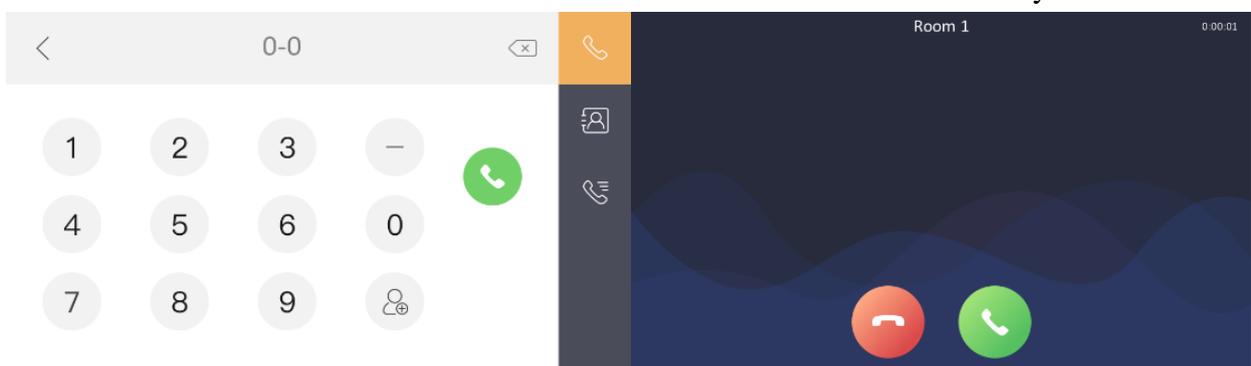

<b>Title:</b>	How to configure Door Station and Indoor extension on Indoor Station (Local Interface)	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	5 of 5

2) Press Door Station dial button, the indoor station will receive the call successfully.





See Far, Go Further