

How to set parameters for display screen use Hik EE&Parking LED Display Software V5.3.0 (old)

Applicable

1. Device: E&E Screening、Parking Guidance Screen; DS-TVL224-4-5Y、DS-TVB200、DS-TVL121-3-5D、DS-TVL121-6-5D、DS-TVL121-9-5D (Old card&Ship before November 2020)
2. Configuration Tool: Hik EE&Parking LED Display Software V5.3.0 (old) .exe
ftp://hikftp.hikvision.com:400/Product File(Overseas)/00 Oversea Products/04 Mobile & Traffic/04 Firmware& Software/04 Entrance&Exit/00_Enrance&Exit Tool/出入口停车场 LED 显示屏开发演示软件/old/ Hik EE&Parking LED Display Software V5.3.0 (old) .exe



Installation

Double-click the " Hik EE&Parking LED Display Software V5.3.0 (old) .exe " installation package, follow the prompts to complete the installation and open the demonstration tool.

PS: Some servers will prompt "Unable to find Macromedia Shockwave Flash" during installation.


Solution: Install [flashplayerax_install_cn](#) on the server

ftp://hikftp.hikvision.com:400/Product File(Overseas)/00 Oversea Products /04 Mobile & Traffic/04 Firmware& Software/04 Entrance&Exit/00_Enrance&Exit Tool/出入口停车场 LED 显示屏开发演示软件/old/flashplayerax_install_cn.exe

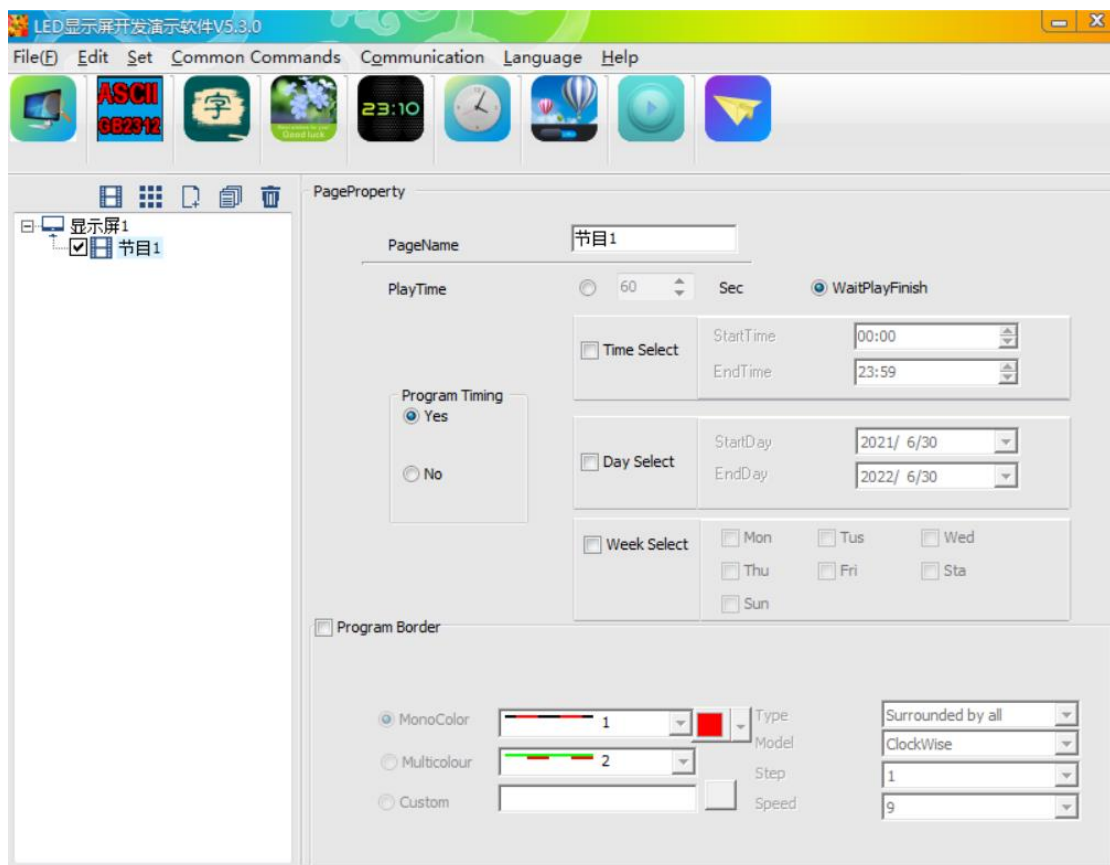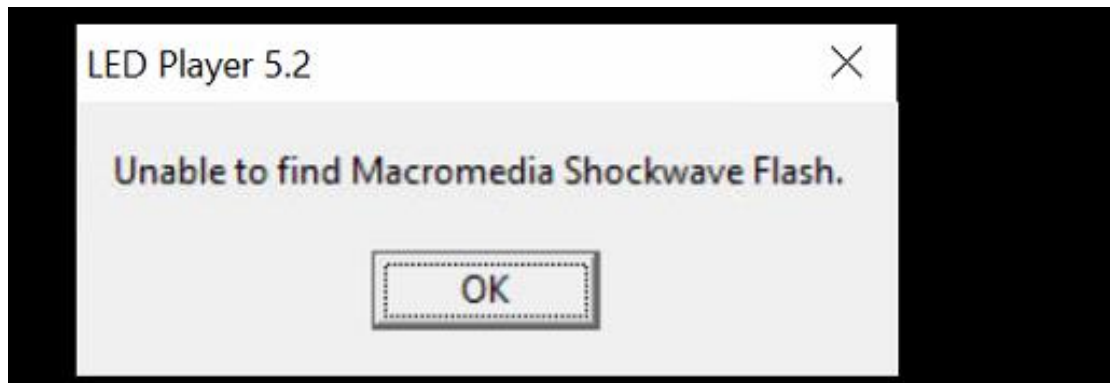


Configuration for display screening

1. Change IP for display screening: Click Search, search control panel. It will automatically display the devices in the same network segment.
2. Then modify remote net information.

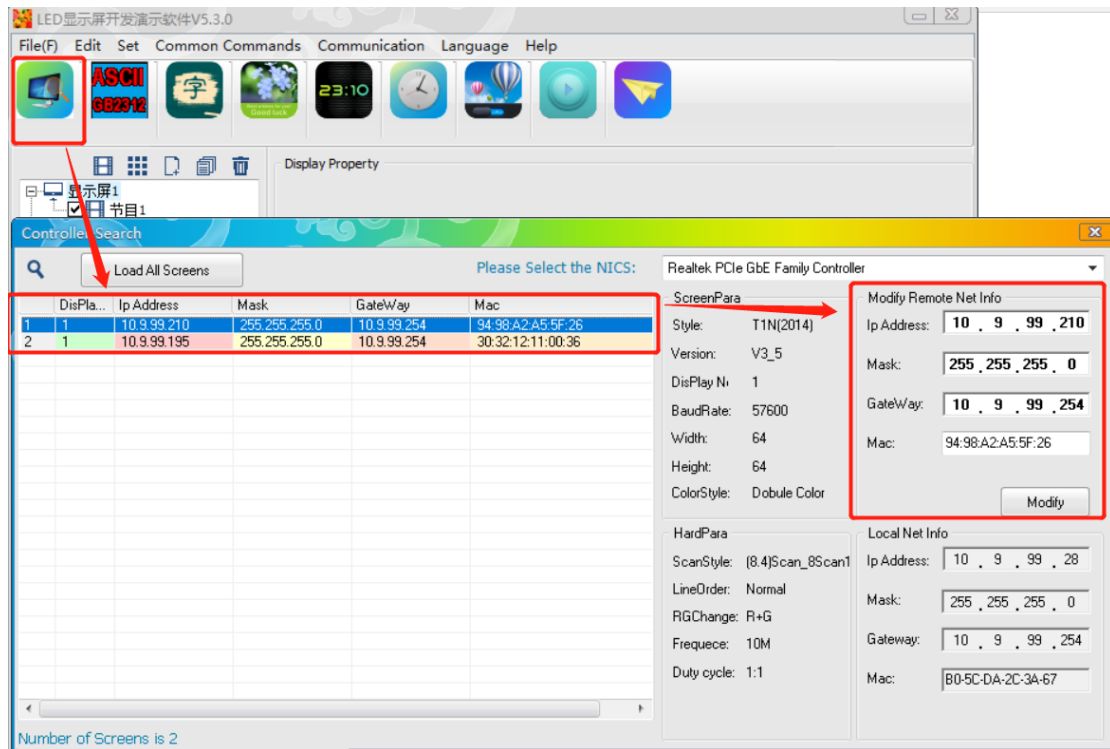

3. Click Load All Screens, enter controller para set page.
4. Click screen para set: set communicate(Net)、OE(Low Valid)、DA(Reverse)、Static IP (according to the actual situation, the default is in parentheses)、Module Selecte(P10 32*16)、ScreenWidth & ScreenHeight(64)、ColorSytle(monochrome). Left click SetScreenPara, and then left click ReadBack. If the communication with the display is normal, the search for the control card is successful.

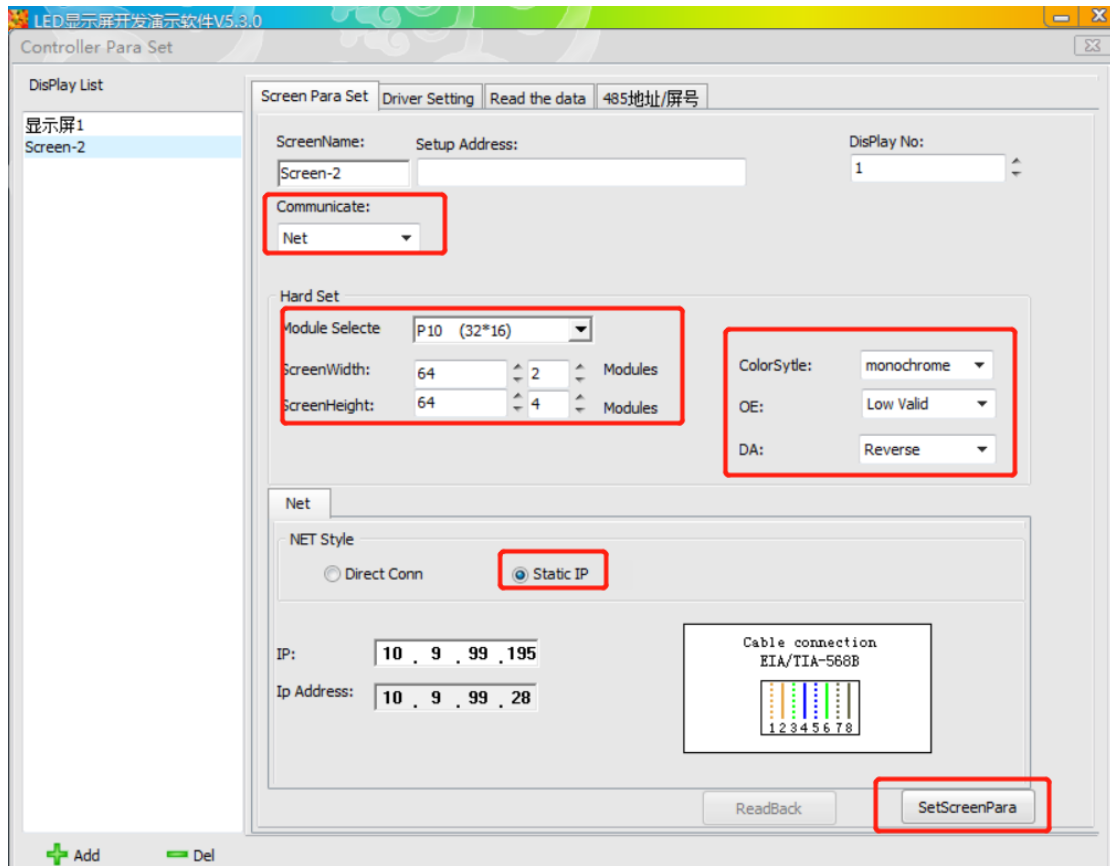

5. Click Driver Setting : select (8.4)Scan_8Scan16Forward16SnapUp 、RGChange(R+G). Left click Manual Set.

