

PROGRAMMING THE PC4010

The PC4010 incorporates a new method of programming which uses a menu system to find a specific program location when it is to be entered.


Book 3 contains the programming flow charts for the PC4010. The charts are arranged in such a way as to allow you to quickly find any option and the path required to arrive at the program location. In addition you will be able to see other options also available to you in the program area.

Plain boxes are program areas and shaded boxes are menu selections.

Two methods may be used to select the different menu items to arrive at a program location. With the first, you may use the arrow keys (< >) to scroll through the menu items. When the desired item is displayed press the [*] key. The [*] key is used as an 'ENTER' or 'SELECT' key. The panel will then move you to the next set of options.

The other method incorporates a 'HOTKEY' system. Every menu and program item contains a one or two digit 'HOTKEY' entry. Simply press the number(s) in the menu or program box and the panel will automatically select the item for you. DO NOT PRESS THE [*] AFTER ENTERING THE 'HOTKEY' NUMBER. This second method is much quicker once you become familiar with it.

EXAMPLE: We wish to program the Exit Delay for Partition 4. The following is the flow chart located in Book 3.

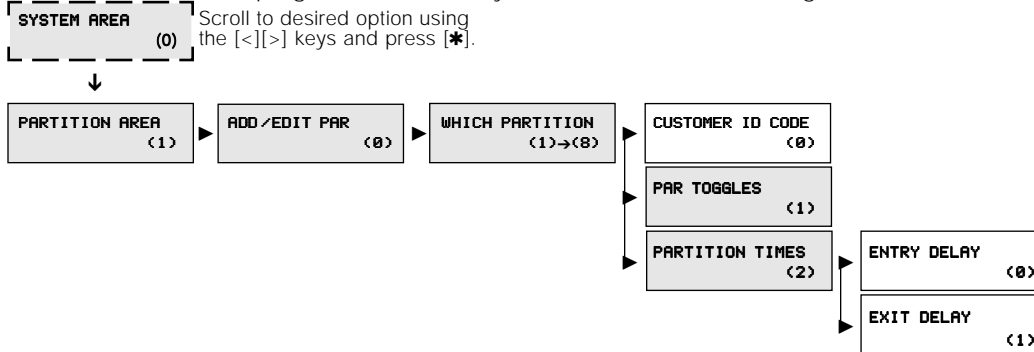

Using the first method the arrow keys would have to be pressed many times to scroll to the various items followed by the [*] key to select the item. Twelve keystrokes would be required after entering Installer Programming providing no mistakes are made. The keystrokes required are as follows:

[>], [*] to select PARTITION AREA [>], [>], [*] to select PARTITION TIMES
[*] to select ADD/EDIT PAR [>], [*] to select EXIT DELAY
[>], [>], [>], [*] to select to PARTITION 4

Using the second 'HOTKEY' method we require only 5 keystrokes:

[1] to select PARTITION AREA [2] to select PARTITION TIMES
[0] to select ADD/EDIT PAR [1] to select EXIT DELAY
[4] to select PARTITION 4

With less keystrokes required, programming is quicker as there is less chance of an error occurring.

At any time you may press the [#] key to exit a section. ANY DATA ENTERED WILL BE CHANGED. THE [#] KEY IS NOT AN ABORT KEY! The [#] key can also be pressed to move you back to the previous menu. Pressing the [#] key several times will exit you from Installer Programming.

To make programming easier the INDEX at the back of the Programming Manual includes the chart number beside every option as well as the page number for a description of the option.

Programming Toggle Options

Some program areas contain several toggle options which pertain to the menu item selected. Use the arrow keys (<>) to scroll through the various items. Press the [*] key to toggle between [Y]es and [N]o for each feature. Once all the toggle options have been programmed press the [#] key to save your changes return to the previous menu.

Programming HEX Digits

Often HEX digits are required for a program item. When a HEX digit is required press the [*] key to enter the HEX menu. You may use the arrow keys to scroll through the HEX digits (A through F) and when the desired letter is displayed press the [*] key.

Another much quicker method for entering HEX digits is to, first, press the [*] key followed by the number corresponding to the HEX letter i.e. A = 1, B = 2, C = 3, up to F = 6. The [*] key must be pressed before entering each HEX digit as the software returns you to decimal programming automatically after each entry.

EXAMPLE: To enter data 'ABCD' on a PC4010 you would enter:

[*], [1], [*], [2], [*], [3], [*], [4]

Note: The [*] key is required before every HEX digit entered.

PROGRAMMING WORK SHEETS

Installer Options

■ **Installer's Code** (0) ▶ (00) ▶ (0)

Default Default

4 Digit Code 4 0 1 0 _____ or 6 Digit Code 4 0 1 0 0 0 _____

■ **Grand Master Code** (0) ▶ (00) ▶ (1)

Default Default

4 Digit Code 1 2 3 4 _____ or 6 Digit Code 1 2 3 4 5 6 _____

■ **2nd Grand Master Code** (0) ▶ (00) ▶ (2)

Default Default

4 Digit Code A A A A _____ or 6 Digit Code A A A A 0 0 _____

■ **Walk Test Code** (0) ▶ (00) ▶ (3)

Default Default

4 Digit Code A A A A _____ or 6 Digit Code A A A A 0 0 _____

■ **Installer's Lockout Enabled** (0) ▶ (00) ▶ (4)

Default

No Yes/No _____

Event Messages

■ **Fail to Arm Event Message** (0) ▶ (01) ▶ (0)

Default

S y s t e m H a s
F a i l e d T o A r m

■ **Alarm When Armed Event Message** (0) ▶ (01) ▶ (1)

Default

A l a r m O c c u r r e d
W h i l e A r m e d

■ **Smoke Detector Event Message** (0) ▶ (01) ▶ (2)

Default

F i r e A l a r m ! ! !
2 W i r e S m o k e

■ **Waterflow Zone Event Message** (0) ▶ (01) ▶ (3)

Default

F i r e A l a r m ! ! !
W a t e r f l o w S e n s o r

■ **Sensor Reset Message** (0) ▶ (01) ▶ (4)

Default

S e n s o r R e s e t

■ **Utility Output Message** (0) ▶ (01) ▶ (5)

Default

U t i l i t y O u t p u t

The following messages will be displayed only when the Double EOL option is enabled.

■ **Zone Tamper Event Message** (0) ▶ (01) ▶ (6)

Default

Z o n e T a m p e r < >

■ **Zone Fault Event Message** (0) ▶ (01) ▶ (7)

Default

Z o n e F a u l t < >

System Options

■ System Toggle Options (0) ▶ (02) ▶ (0)

	<u>Default</u>				<u>Default</u>		
Change Sys Mas	Yes	Yes/No	<input type="checkbox"/>	Glob [A] Enab	Yes	Yes/No	<input type="checkbox"/>
Power Up Shunt	Yes	Yes/No	<input type="checkbox"/>	Glob [P] Enab	Yes	Yes/No	<input type="checkbox"/>
AC Tbl Disp	Yes	Yes/No	<input type="checkbox"/>	Glob Disp Clk	Yes	Yes/No	<input type="checkbox"/>
60 Hz Line	Yes	Yes/No	<input type="checkbox"/>	Glob Keypad Lock	No	Yes/No	<input type="checkbox"/>
For future use	No	Yes/No	<input type="checkbox"/>	Kypd #1 Glob	No	Yes/No	<input type="checkbox"/>
AC Inhibit Arm	No	Yes/No	<input type="checkbox"/>	Tampers Inhibit	No	Yes/No	<input type="checkbox"/>
DC Inhibit Arm	No	Yes/No	<input type="checkbox"/>	Troub Req Code	No	Yes/No	<input type="checkbox"/>
Memory Disp	No	Yes/No	<input type="checkbox"/>	UL Commercial	No	Yes/No	<input type="checkbox"/>
Bypass Disp	No	Yes/No	<input type="checkbox"/>	RF Tmp Disarm	Yes	Yes/No	<input type="checkbox"/>
Bell Shutdown	Yes	Yes/No	<input type="checkbox"/>	Sys.Flt.Squawk	No	Yes/No	<input type="checkbox"/>
Follows + Alarms	No	Yes/No	<input type="checkbox"/>	Cde Disp Inhib	No	Yes/No	<input type="checkbox"/>
6 Digit Codes	No	Yes/No	<input type="checkbox"/>	Glob Alm Annum	No	Yes/No	<input type="checkbox"/>
Hourly Print	No	Yes/No	<input type="checkbox"/>	Glob Kypd Trb	Yes	Yes/No	<input type="checkbox"/>
Military Time	No	Yes/No	<input type="checkbox"/>	Glb Kypd Stat	No	Yes/No	<input type="checkbox"/>
Keypad Tampers	No	Yes/No	<input type="checkbox"/>	Glb Kp All Ent	No	Yes/No	<input type="checkbox"/>
Glob [F] Enab	Yes	Yes/No	<input type="checkbox"/>				

■ Keypad Toggle Options (0) ▶ (02) ▶ (1)

	<u>Default</u>				<u>Default</u>		
[F] Bell	Yes	Yes/No	<input type="checkbox"/>	[A] Aud Buzz	No	Yes/No	<input type="checkbox"/>
[F] Pulse Bell	Yes	Yes/No	<input type="checkbox"/>	[P] Sil Bell	Yes	Yes/No	<input type="checkbox"/>
[F] Buzzer	Yes	Yes/No	<input type="checkbox"/>	[P] Stdy Bell	Yes	Yes/No	<input type="checkbox"/>
[A] Sil Bell	Yes	Yes/No	<input type="checkbox"/>	[P] Silent Buz	Yes	Yes/No	<input type="checkbox"/>
[A] Stdy Bell	Yes	Yes/No	<input type="checkbox"/>				

■ Keypad Lockout Options (0) ▶ (02) ▶ (2)

	<u>Default</u>		
Total Bad Codes (000-255)	005	<input type="checkbox"/>	(0) ▶ (02) ▶ (2) ▶ (0)
Lockout Duration (000-255 mins.)	015	<input type="checkbox"/>	(0) ▶ (02) ▶ (2) ▶ (1)

■ System Times (0) ▶ (02) ▶ (3)

	<u>Default</u>		
Zone Response (005-255 x 100ms)	005 (500ms)	<input type="checkbox"/>	(0) ▶ (02) ▶ (3) ▶ (0)
Bell Cutoff (000-255 mins.)	004	<input type="checkbox"/>	(0) ▶ (02) ▶ (3) ▶ (1)
Police Code Time (000-255 mins.)	060	<input type="checkbox"/>	(0) ▶ (02) ▶ (3) ▶ (2)
Keypad Timeout (000-255 sec.)	020	<input type="checkbox"/>	(0) ▶ (02) ▶ (3) ▶ (3)

■ Zone Supervision (0) ▶ (02) ▶ (4)

	<u>Default</u>		
Single EOL	No EOL	<input type="checkbox"/>	(0) ▶ (02) ▶ (4) ▶ (0)
	Single EOL	<input type="checkbox"/>	(0) ▶ (02) ▶ (4) ▶ (1)
	Double EOL	<input type="checkbox"/>	(0) ▶ (02) ▶ (4) ▶ (2)

DLS Section

■ **DLS Toggles** (0) ▶ (03) ▶ (0)

Default

DLS Enable	No	Yes/No	<input type="checkbox"/>
User Call Up	No	Yes/No	<input type="checkbox"/>
Double Call	No	Yes/No	<input type="checkbox"/>
DLS Callback	No	Yes/No	<input type="checkbox"/>
Periodic DLS	No	Yes/No	<input type="checkbox"/>
User Enabs DLS	Yes	Yes/No	<input type="checkbox"/>

■ **Periodic Callup** (0) ▶ (03) ▶ (1)

Set Cycle Days (000-255 days)	030	<input type="text"/>	(0) ▶ (03) ▶ (1) ▶ (0)
Set 24 Hr Time (HH:MM)	0000	<input type="text"/>	(0) ▶ (03) ▶ (1) ▶ (1)

■ **Phone Number** (31 digits max.) (0) ▶ (03) ▶ (2)

■ **Panel ID Code**

4911 (0) ▶ (03) ▶ (3)

■ **Access Code**

4910 (0) ▶ (03) ▶ (4)

■ **2 Call Timer** (000-255 secs.)

060 (0) ▶ (03) ▶ (5)

■ **# OF RINGS** (000-255)

008 (0) ▶ (03) ▶ (6)

Communicator

MAIN ITEMS (0) ▶ (04) ▶ (0)

■ **1st Phone Number** (31 digits max.) (0) ▶ (04) ▶ (0) ▶ (0) ▶ (0)

Default

Format (0) ▶ (04) ▶ (0) ▶ (0) ▶ (1) ▶ (00)→(18) [01] 20 Bps 2300 *

Dial Direction (0) ▶ (04) ▶ (0) ▶ (0) ▶ (2) Yes

Alarm/Restore Y/N Open/Close Y/N All Others Y/N

■ **2nd Phone Number** (31 digits max.) (0) ▶ (04) ▶ (0) ▶ (1) ▶ (0)

Default

Format (0) ▶ (04) ▶ (0) ▶ (1) ▶ (1) ▶ (00)→(18) [01] 20 Bps 2300 *

Dial Direction (0) ▶ (04) ▶ (0) ▶ (1) ▶ (2) No

Alarm/Restore Y/N Open/Close Y/N All Others Y/N

■ **3rd Phone Number** (31 digits max.) (0) ▶ (04) ▶ (0) ▶ (2) ▶ (0)

Default

Format (0) ▶ (04) ▶ (0) ▶ (2) ▶ (1) ▶ (00)→(18) [01] 20 Bps 2300 _____*

Dial Direction (0) ▶ (04) ▶ (0) ▶ (2) ▶ (2) No

Alarm/Restore _____ Y/N Open/Close _____ Y/N All Others _____ Y/N

* **Possible Selections**

- | | |
|---|--|
| (00) 10 Bps 1400 - Silent Knight, Ademco Slow | (11) 40 Bps 1400 X - Radionics Extended |
| (01) 20 Bps 2300 - SESCOA, Franklin, DCI, Vertex | (12) 40 Bps 2300 XP - Radionics Extended with Parity |
| (02) 20 Bps 1400 - Silent Knight Fast | (13) 40 Bps 1400 XP - Radionics Extended with Parity |
| (03) 40 Bps 2300 - Radionics | (14) SIA Fsk Format |
| (04) 40 Bps 1400 - Radionics | (15) SESCOA Super Speed |
| (05) 40 Bps 2300 P - Radionics with Parity | (16) SESCOA Super Speed ID |
| (06) 40 Bps 1400 P - Radionics with Parity | (17) DTMF Contact ID |
| (07) 10 Bps 1400 X - Silent Knight, Ademco Slow extended | (18) 4/3 DTMF Format |
| (08) 20 Bps 2300 X - SESCOA, Franklin, DCI, Vertex extended | (19) Pager 1 |
| (09) 20 Bps 1400 X - Silent Knight, Ademco Fast extended | (20) Pager 2 |
| (10) 40 Bps 2300 X - Radionics Extended | (21) Pager 3 |

Default

■ **System ID Code** (0) ▶ (04) ▶ (0) ▶ (3) FFFF _____

■ **Comms Toggles** (0) ▶ (04) ▶ (1)

	<u>Default</u>				<u>Default</u>		
Comms Enabled	Yes	Yes/No	_____	Ringback	No	Yes/No	_____
DTMF Dialing	Yes	Yes/No	_____	Ringback Squawk	No	Yes/No	_____
Restore On BTO	Yes	Yes/No	_____	Periodic Tx?	No	Yes/No	_____
Rest On Disarm	No	Yes/No	_____	Europe Dial	No	Yes/No	_____
Shut Down 24 Hrs	No	Yes/No	_____	Default Dial	Yes	Yes/No	_____
PC ID	No	Yes/No	_____	Ph 1-2 Backup	No	Yes/No	_____
PC On Auto Arm	Yes	Yes/No	_____	Ph 1-3 Backup	No	Yes/No	_____
PC ID Restores	No	Yes/No	_____	Ph 2-3 Backup	No	Yes/No	_____
TLM Enabled	Yes	Yes/No	_____	Busy Tone Det.	No	Yes/No	_____
TLM Aud Bell	Yes	Yes/No	_____	1300 Hz I.D.	No	Yes/No	_____
FTC Aud Bell	No	Yes/No	_____	Alternate Dial	No	Yes/No	_____
TLM + Alarm Aud	No	Yes/No	_____				

■ **Comms Misc** (0) ▶ (04) ▶ (2)

Default

DTMF Attempts (000-255)	004	_____	(0) ▶ (04) ▶ (2) ▶ (0)
Swinger Limit (000-255)	003	_____	(0) ▶ (04) ▶ (2) ▶ (1)
AC Fail Tx Delay (0000-2400 HH:MM)	0700	_____	(0) ▶ (04) ▶ (2) ▶ (2)
Zone Tx Delay (000-255 secs.)	000	_____	(0) ▶ (04) ▶ (2) ▶ (3)

■ **Test Code Tx** (0) ▶ (04) ▶ (2) ▶ (4)

Set Cycle Days (000-255 days)	030	_____	(0) ▶ (04) ▶ (2) ▶ (4) ▶ (0)
Set 24 Hr Time (HH:MM)	0000	_____	(0) ▶ (04) ▶ (2) ▶ (4) ▶ (1)

■ **Zone Trouble** (0) ▶ (04) ▶ (3) ▶ (02)

Zone 01 Trouble	<input type="checkbox"/>	Zone 17 Trouble	<input type="checkbox"/>	Zone 33 Trouble	<input type="checkbox"/>	Zone 49 Trouble	<input type="checkbox"/>
Zone 02 Trouble	<input type="checkbox"/>	Zone 18 Trouble	<input type="checkbox"/>	Zone 34 Trouble	<input type="checkbox"/>	Zone 50 Trouble	<input type="checkbox"/>
Zone 03 Trouble	<input type="checkbox"/>	Zone 19 Trouble	<input type="checkbox"/>	Zone 35 Trouble	<input type="checkbox"/>	Zone 51 Trouble	<input type="checkbox"/>
Zone 04 Trouble	<input type="checkbox"/>	Zone 20 Trouble	<input type="checkbox"/>	Zone 36 Trouble	<input type="checkbox"/>	Zone 52 Trouble	<input type="checkbox"/>
Zone 05 Trouble	<input type="checkbox"/>	Zone 21 Trouble	<input type="checkbox"/>	Zone 37 Trouble	<input type="checkbox"/>	Zone 53 Trouble	<input type="checkbox"/>
Zone 06 Trouble	<input type="checkbox"/>	Zone 22 Trouble	<input type="checkbox"/>	Zone 38 Trouble	<input type="checkbox"/>	Zone 54 Trouble	<input type="checkbox"/>
Zone 07 Trouble	<input type="checkbox"/>	Zone 23 Trouble	<input type="checkbox"/>	Zone 39 Trouble	<input type="checkbox"/>	Zone 55 Trouble	<input type="checkbox"/>
Zone 08 Trouble	<input type="checkbox"/>	Zone 24 Trouble	<input type="checkbox"/>	Zone 40 Trouble	<input type="checkbox"/>	Zone 56 Trouble	<input type="checkbox"/>
Zone 09 Trouble	<input type="checkbox"/>	Zone 25 Trouble	<input type="checkbox"/>	Zone 41 Trouble	<input type="checkbox"/>	Zone 57 Trouble	<input type="checkbox"/>
Zone 10 Trouble	<input type="checkbox"/>	Zone 26 Trouble	<input type="checkbox"/>	Zone 42 Trouble	<input type="checkbox"/>	Zone 58 Trouble	<input type="checkbox"/>
Zone 11 Trouble	<input type="checkbox"/>	Zone 27 Trouble	<input type="checkbox"/>	Zone 43 Trouble	<input type="checkbox"/>	Zone 59 Trouble	<input type="checkbox"/>
Zone 12 Trouble	<input type="checkbox"/>	Zone 28 Trouble	<input type="checkbox"/>	Zone 44 Trouble	<input type="checkbox"/>	Zone 60 Trouble	<input type="checkbox"/>
Zone 13 Trouble	<input type="checkbox"/>	Zone 29 Trouble	<input type="checkbox"/>	Zone 45 Trouble	<input type="checkbox"/>	Zone 61 Trouble	<input type="checkbox"/>
Zone 14 Trouble	<input type="checkbox"/>	Zone 30 Trouble	<input type="checkbox"/>	Zone 46 Trouble	<input type="checkbox"/>	Zone 62 Trouble	<input type="checkbox"/>
Zone 15 Trouble	<input type="checkbox"/>	Zone 31 Trouble	<input type="checkbox"/>	Zone 47 Trouble	<input type="checkbox"/>	Zone 63 Trouble	<input type="checkbox"/>
Zone 16 Trouble	<input type="checkbox"/>	Zone 32 Trouble	<input type="checkbox"/>	Zone 48 Trouble	<input type="checkbox"/>	Zone 64 Trouble	<input type="checkbox"/>

■ **Zone Trob.Rest.** (0) ▶ (04) ▶ (3) ▶ (03)

Zone 01 Restoral	<input type="checkbox"/>	Zone 17 Restoral	<input type="checkbox"/>	Zone 33 Restoral	<input type="checkbox"/>	Zone 49 Restoral	<input type="checkbox"/>
Zone 02 Restoral	<input type="checkbox"/>	Zone 18 Restoral	<input type="checkbox"/>	Zone 34 Restoral	<input type="checkbox"/>	Zone 50 Restoral	<input type="checkbox"/>
Zone 03 Restoral	<input type="checkbox"/>	Zone 19 Restoral	<input type="checkbox"/>	Zone 35 Restoral	<input type="checkbox"/>	Zone 51 Restoral	<input type="checkbox"/>
Zone 04 Restoral	<input type="checkbox"/>	Zone 20 Restoral	<input type="checkbox"/>	Zone 36 Restoral	<input type="checkbox"/>	Zone 52 Restoral	<input type="checkbox"/>
Zone 05 Restoral	<input type="checkbox"/>	Zone 21 Restoral	<input type="checkbox"/>	Zone 37 Restoral	<input type="checkbox"/>	Zone 53 Restoral	<input type="checkbox"/>
Zone 06 Restoral	<input type="checkbox"/>	Zone 22 Restoral	<input type="checkbox"/>	Zone 38 Restoral	<input type="checkbox"/>	Zone 54 Restoral	<input type="checkbox"/>
Zone 07 Restoral	<input type="checkbox"/>	Zone 23 Restoral	<input type="checkbox"/>	Zone 39 Restoral	<input type="checkbox"/>	Zone 55 Restoral	<input type="checkbox"/>
Zone 08 Restoral	<input type="checkbox"/>	Zone 24 Restoral	<input type="checkbox"/>	Zone 40 Restoral	<input type="checkbox"/>	Zone 56 Restoral	<input type="checkbox"/>
Zone 09 Restoral	<input type="checkbox"/>	Zone 25 Restoral	<input type="checkbox"/>	Zone 41 Restoral	<input type="checkbox"/>	Zone 57 Restoral	<input type="checkbox"/>
Zone 10 Restoral	<input type="checkbox"/>	Zone 26 Restoral	<input type="checkbox"/>	Zone 42 Restoral	<input type="checkbox"/>	Zone 58 Restoral	<input type="checkbox"/>
Zone 11 Restoral	<input type="checkbox"/>	Zone 27 Restoral	<input type="checkbox"/>	Zone 43 Restoral	<input type="checkbox"/>	Zone 59 Restoral	<input type="checkbox"/>
Zone 12 Restoral	<input type="checkbox"/>	Zone 28 Restoral	<input type="checkbox"/>	Zone 44 Restoral	<input type="checkbox"/>	Zone 60 Restoral	<input type="checkbox"/>
Zone 13 Restoral	<input type="checkbox"/>	Zone 29 Restoral	<input type="checkbox"/>	Zone 45 Restoral	<input type="checkbox"/>	Zone 61 Restoral	<input type="checkbox"/>
Zone 14 Restoral	<input type="checkbox"/>	Zone 30 Restoral	<input type="checkbox"/>	Zone 46 Restoral	<input type="checkbox"/>	Zone 62 Restoral	<input type="checkbox"/>
Zone 15 Restoral	<input type="checkbox"/>	Zone 31 Restoral	<input type="checkbox"/>	Zone 47 Restoral	<input type="checkbox"/>	Zone 63 Restoral	<input type="checkbox"/>
Zone 16 Restoral	<input type="checkbox"/>	Zone 32 Restoral	<input type="checkbox"/>	Zone 48 Restoral	<input type="checkbox"/>	Zone 64 Restoral	<input type="checkbox"/>

■ **Zone Fault** (0) ▶ (04) ▶ (3) ▶ (04)

Zone 01 Fault <input type="checkbox"/>	Zone 17 Fault <input type="checkbox"/>	Zone 33 Fault <input type="checkbox"/>	Zone 49 Fault <input type="checkbox"/>
Zone 02 Fault <input type="checkbox"/>	Zone 18 Fault <input type="checkbox"/>	Zone 34 Fault <input type="checkbox"/>	Zone 50 Fault <input type="checkbox"/>
Zone 03 Fault <input type="checkbox"/>	Zone 19 Fault <input type="checkbox"/>	Zone 35 Fault <input type="checkbox"/>	Zone 51 Fault <input type="checkbox"/>
Zone 04 Fault <input type="checkbox"/>	Zone 20 Fault <input type="checkbox"/>	Zone 36 Fault <input type="checkbox"/>	Zone 52 Fault <input type="checkbox"/>
Zone 05 Fault <input type="checkbox"/>	Zone 21 Fault <input type="checkbox"/>	Zone 37 Fault <input type="checkbox"/>	Zone 53 Fault <input type="checkbox"/>
Zone 06 Fault <input type="checkbox"/>	Zone 22 Fault <input type="checkbox"/>	Zone 38 Fault <input type="checkbox"/>	Zone 54 Fault <input type="checkbox"/>
Zone 07 Fault <input type="checkbox"/>	Zone 23 Fault <input type="checkbox"/>	Zone 39 Fault <input type="checkbox"/>	Zone 55 Fault <input type="checkbox"/>
Zone 08 Fault <input type="checkbox"/>	Zone 24 Fault <input type="checkbox"/>	Zone 40 Fault <input type="checkbox"/>	Zone 56 Fault <input type="checkbox"/>
Zone 09 Fault <input type="checkbox"/>	Zone 25 Fault <input type="checkbox"/>	Zone 41 Fault <input type="checkbox"/>	Zone 57 Fault <input type="checkbox"/>
Zone 10 Fault <input type="checkbox"/>	Zone 26 Fault <input type="checkbox"/>	Zone 42 Fault <input type="checkbox"/>	Zone 58 Fault <input type="checkbox"/>
Zone 11 Fault <input type="checkbox"/>	Zone 27 Fault <input type="checkbox"/>	Zone 43 Fault <input type="checkbox"/>	Zone 59 Fault <input type="checkbox"/>
Zone 12 Fault <input type="checkbox"/>	Zone 28 Fault <input type="checkbox"/>	Zone 44 Fault <input type="checkbox"/>	Zone 60 Fault <input type="checkbox"/>
Zone 13 Fault <input type="checkbox"/>	Zone 29 Fault <input type="checkbox"/>	Zone 45 Fault <input type="checkbox"/>	Zone 61 Fault <input type="checkbox"/>
Zone 14 Fault <input type="checkbox"/>	Zone 30 Fault <input type="checkbox"/>	Zone 46 Fault <input type="checkbox"/>	Zone 62 Fault <input type="checkbox"/>
Zone 15 Fault <input type="checkbox"/>	Zone 31 Fault <input type="checkbox"/>	Zone 47 Fault <input type="checkbox"/>	Zone 63 Fault <input type="checkbox"/>
Zone 16 Fault <input type="checkbox"/>	Zone 32 Fault <input type="checkbox"/>	Zone 48 Fault <input type="checkbox"/>	Zone 64 Fault <input type="checkbox"/>

■ **Zone Fault Rest** (0) ▶ (04) ▶ (3) ▶ (05)

Zone 01 Fault Rest <input type="checkbox"/>	Zone 17 Fault Rest <input type="checkbox"/>	Zone 33 Fault Rest <input type="checkbox"/>	Zone 49 Fault Rest <input type="checkbox"/>
Zone 02 Fault Rest <input type="checkbox"/>	Zone 18 Fault Rest <input type="checkbox"/>	Zone 34 Fault Rest <input type="checkbox"/>	Zone 50 Fault Rest <input type="checkbox"/>
Zone 03 Fault Rest <input type="checkbox"/>	Zone 19 Fault Rest <input type="checkbox"/>	Zone 35 Fault Rest <input type="checkbox"/>	Zone 51 Fault Rest <input type="checkbox"/>
Zone 04 Fault Rest <input type="checkbox"/>	Zone 20 Fault Rest <input type="checkbox"/>	Zone 36 Fault Rest <input type="checkbox"/>	Zone 52 Fault Rest <input type="checkbox"/>
Zone 05 Fault Rest <input type="checkbox"/>	Zone 21 Fault Rest <input type="checkbox"/>	Zone 37 Fault Rest <input type="checkbox"/>	Zone 53 Fault Rest <input type="checkbox"/>
Zone 06 Fault Rest <input type="checkbox"/>	Zone 22 Fault Rest <input type="checkbox"/>	Zone 38 Fault Rest <input type="checkbox"/>	Zone 54 Fault Rest <input type="checkbox"/>
Zone 07 Fault Rest <input type="checkbox"/>	Zone 23 Fault Rest <input type="checkbox"/>	Zone 39 Fault Rest <input type="checkbox"/>	Zone 55 Fault Rest <input type="checkbox"/>
Zone 08 Fault Rest <input type="checkbox"/>	Zone 24 Fault Rest <input type="checkbox"/>	Zone 40 Fault Rest <input type="checkbox"/>	Zone 56 Fault Rest <input type="checkbox"/>
Zone 09 Fault Rest <input type="checkbox"/>	Zone 25 Fault Rest <input type="checkbox"/>	Zone 41 Fault Rest <input type="checkbox"/>	Zone 57 Fault Rest <input type="checkbox"/>
Zone 10 Fault Rest <input type="checkbox"/>	Zone 26 Fault Rest <input type="checkbox"/>	Zone 42 Fault Rest <input type="checkbox"/>	Zone 58 Fault Rest <input type="checkbox"/>
Zone 11 Fault Rest <input type="checkbox"/>	Zone 27 Fault Rest <input type="checkbox"/>	Zone 43 Fault Rest <input type="checkbox"/>	Zone 59 Fault Rest <input type="checkbox"/>
Zone 12 Fault Rest <input type="checkbox"/>	Zone 28 Fault Rest <input type="checkbox"/>	Zone 44 Fault Rest <input type="checkbox"/>	Zone 60 Fault Rest <input type="checkbox"/>
Zone 13 Fault Rest <input type="checkbox"/>	Zone 29 Fault Rest <input type="checkbox"/>	Zone 45 Fault Rest <input type="checkbox"/>	Zone 61 Fault Rest <input type="checkbox"/>
Zone 14 Fault Rest <input type="checkbox"/>	Zone 30 Fault Rest <input type="checkbox"/>	Zone 46 Fault Rest <input type="checkbox"/>	Zone 62 Fault Rest <input type="checkbox"/>
Zone 15 Fault Rest <input type="checkbox"/>	Zone 31 Fault Rest <input type="checkbox"/>	Zone 47 Fault Rest <input type="checkbox"/>	Zone 63 Fault Rest <input type="checkbox"/>
Zone 16 Fault Rest <input type="checkbox"/>	Zone 32 Fault Rest <input type="checkbox"/>	Zone 48 Fault Rest <input type="checkbox"/>	Zone 64 Fault Rest <input type="checkbox"/>

■ **Zone Sensor Flt** (0) ▶ (04) ▶ (3) ▶ (06)

Zone 01 Sensor Flt	_____	Zone 17 Sensor Flt	_____	Zone 33 Sensor Flt	_____	Zone 49 Sensor Flt	_____
Zone 02 Sensor Flt	_____	Zone 18 Sensor Flt	_____	Zone 34 Sensor Flt	_____	Zone 50 Sensor Flt	_____
Zone 03 Sensor Flt	_____	Zone 19 Sensor Flt	_____	Zone 35 Sensor Flt	_____	Zone 51 Sensor Flt	_____
Zone 04 Sensor Flt	_____	Zone 20 Sensor Flt	_____	Zone 36 Sensor Flt	_____	Zone 52 Sensor Flt	_____
Zone 05 Sensor Flt	_____	Zone 21 Sensor Flt	_____	Zone 37 Sensor Flt	_____	Zone 53 Sensor Flt	_____
Zone 06 Sensor Flt	_____	Zone 22 Sensor Flt	_____	Zone 38 Sensor Flt	_____	Zone 54 Sensor Flt	_____
Zone 07 Sensor Flt	_____	Zone 23 Sensor Flt	_____	Zone 39 Sensor Flt	_____	Zone 55 Sensor Flt	_____
Zone 08 Sensor Flt	_____	Zone 24 Sensor Flt	_____	Zone 40 Sensor Flt	_____	Zone 56 Sensor Flt	_____
Zone 09 Sensor Flt	_____	Zone 25 Sensor Flt	_____	Zone 41 Sensor Flt	_____	Zone 57 Sensor Flt	_____
Zone 10 Sensor Flt	_____	Zone 26 Sensor Flt	_____	Zone 42 Sensor Flt	_____	Zone 58 Sensor Flt	_____
Zone 11 Sensor Flt	_____	Zone 27 Sensor Flt	_____	Zone 43 Sensor Flt	_____	Zone 59 Sensor Flt	_____
Zone 12 Sensor Flt	_____	Zone 28 Sensor Flt	_____	Zone 44 Sensor Flt	_____	Zone 60 Sensor Flt	_____
Zone 13 Sensor Flt	_____	Zone 29 Sensor Flt	_____	Zone 45 Sensor Flt	_____	Zone 61 Sensor Flt	_____
Zone 14 Sensor Flt	_____	Zone 30 Sensor Flt	_____	Zone 46 Sensor Flt	_____	Zone 62 Sensor Flt	_____
Zone 15 Sensor Flt	_____	Zone 31 Sensor Flt	_____	Zone 47 Sensor Flt	_____	Zone 63 Sensor Flt	_____
Zone 16 Sensor Flt	_____	Zone 32 Sensor Flt	_____	Zone 48 Sensor Flt	_____	Zone 64 Sensor Flt	_____

■ **Zone Sensor Rest** (0) ▶ (04) ▶ (3) ▶ (07)

Zone 01 Sensor Rest	_____	Zone 17 Sensor Rest	_____	Zone 33 Sensor Rest	_____	Zone 49 Sensor Rest	_____
Zone 02 Sensor Rest	_____	Zone 18 Sensor Rest	_____	Zone 34 Sensor Rest	_____	Zone 50 Sensor Rest	_____
Zone 03 Sensor Rest	_____	Zone 19 Sensor Rest	_____	Zone 35 Sensor Rest	_____	Zone 51 Sensor Rest	_____
Zone 04 Sensor Rest	_____	Zone 20 Sensor Rest	_____	Zone 36 Sensor Rest	_____	Zone 52 Sensor Rest	_____
Zone 05 Sensor Rest	_____	Zone 21 Sensor Rest	_____	Zone 37 Sensor Rest	_____	Zone 53 Sensor Rest	_____
Zone 06 Sensor Rest	_____	Zone 22 Sensor Rest	_____	Zone 38 Sensor Rest	_____	Zone 54 Sensor Rest	_____
Zone 07 Sensor Rest	_____	Zone 23 Sensor Rest	_____	Zone 39 Sensor Rest	_____	Zone 55 Sensor Rest	_____
Zone 08 Sensor Rest	_____	Zone 24 Sensor Rest	_____	Zone 40 Sensor Rest	_____	Zone 56 Sensor Rest	_____
Zone 09 Sensor Rest	_____	Zone 25 Sensor Rest	_____	Zone 41 Sensor Rest	_____	Zone 57 Sensor Rest	_____
Zone 10 Sensor Rest	_____	Zone 26 Sensor Rest	_____	Zone 42 Sensor Rest	_____	Zone 58 Sensor Rest	_____
Zone 11 Sensor Rest	_____	Zone 27 Sensor Rest	_____	Zone 43 Sensor Rest	_____	Zone 59 Sensor Rest	_____
Zone 12 Sensor Rest	_____	Zone 28 Sensor Rest	_____	Zone 44 Sensor Rest	_____	Zone 60 Sensor Rest	_____
Zone 13 Sensor Rest	_____	Zone 29 Sensor Rest	_____	Zone 45 Sensor Rest	_____	Zone 61 Sensor Rest	_____
Zone 14 Sensor Rest	_____	Zone 30 Sensor Rest	_____	Zone 46 Sensor Rest	_____	Zone 62 Sensor Rest	_____
Zone 15 Sensor Rest	_____	Zone 31 Sensor Rest	_____	Zone 47 Sensor Rest	_____	Zone 63 Sensor Rest	_____
Zone 16 Sensor Rest	_____	Zone 32 Sensor Rest	_____	Zone 48 Sensor Rest	_____	Zone 64 Sensor Rest	_____

MODULE TAMPER ALARMS

■ LCD4500 Keypad Tamper Alarms (0) ▶ (04) ▶ (3) ▶ (10) ▶ (0)

Keypad 1	_____	Keypad 3	_____	Keypad 5	_____	Keypad 7	_____
Keypad 2	_____	Keypad 4	_____	Keypad 6	_____	Keypad 8	_____

■ PC4400 Tamper Alarm (0) ▶ (04) ▶ (3) ▶ (10) ▶ (1)

Module 1 _____

■ PC41XX Tamper Alarms (0) ▶ (04) ▶ (3) ▶ (10) ▶ (2)

Module 1	_____	Module 3	_____	Module 5	_____	Module 7	_____
Module 2	_____	Module 4	_____	Module 6	_____		

■ PC4216 Tamper Alarms (0) ▶ (04) ▶ (3) ▶ (10) ▶ (3)

Module 1	_____	Module 4	_____	Module 6	_____	Module 8	_____
Module 2	_____	Module 5	_____	Module 7	_____	Module 9	_____
Module 3	_____						

■ PC4204 Tamper Alarms (0) ▶ (04) ▶ (3) ▶ (10) ▶ (4)

Module 1	_____	Module 4	_____	Module 7	_____	Module 10	_____
Module 2	_____	Module 5	_____	Module 8	_____	Module 11	_____
Module 3	_____	Module 6	_____	Module 9	_____	Module 12	_____

MODULE TAMPER RESTORALS

■ LCD4500 Keypad Tamper Restorals (0) ▶ (04) ▶ (3) ▶ (11) ▶ (0)

Keypad 1 Keypad 3 Keypad 5 Keypad 7
Keypad 2 Keypad 4 Keypad 6 Keypad 8

■ PC4400 Tamper Restoral (0) ▶ (04) ▶ (3) ▶ (11) ▶ (1)

Module 1

■ PC41XX Tamper Restorals (0) ▶ (04) ▶ (3) ▶ (11) ▶ (2)

Module 1 Module 3 Module 5 Module 7
Module 2 Module 4 Module 6

■ PC4216 Tamper Restorals (0) ▶ (04) ▶ (3) ▶ (11) ▶ (3)

Module 1 Module 4 Module 6 Module 8
Module 2 Module 5 Module 7 Module 9
Module 3

■ PC4204 Tamper Restorals (0) ▶ (04) ▶ (3) ▶ (11) ▶ (4)

Module 1 Module 4 Module 7 Module 10
Module 2 Module 5 Module 8 Module 11
Module 3 Module 6 Module 9 Module 12

■ [F] [A] [P] Keys (0) ▶ (04) ▶ (3) ▶ (12)

[F] Key Alarm [F] Key Restore
[A] Key Alarm [A] Key Restore
[P] Key Alarm [P] Key Restore
User Under Duress Code

■ Closings (0) ▶ (04) ▶ (3) ▶ (13)

User 001 Closing <input type="checkbox"/>	User 033 Closing <input type="checkbox"/>	User 065 Closing <input type="checkbox"/>	User 097 Closing <input type="checkbox"/>
User 002 Closing <input type="checkbox"/>	User 034 Closing <input type="checkbox"/>	User 066 Closing <input type="checkbox"/>	User 098 Closing <input type="checkbox"/>
User 003 Closing <input type="checkbox"/>	User 035 Closing <input type="checkbox"/>	User 067 Closing <input type="checkbox"/>	User 099 Closing <input type="checkbox"/>
User 004 Closing <input type="checkbox"/>	User 036 Closing <input type="checkbox"/>	User 068 Closing <input type="checkbox"/>	User 100 Closing <input type="checkbox"/>
User 005 Closing <input type="checkbox"/>	User 037 Closing <input type="checkbox"/>	User 069 Closing <input type="checkbox"/>	User 101 Closing <input type="checkbox"/>
User 006 Closing <input type="checkbox"/>	User 038 Closing <input type="checkbox"/>	User 070 Closing <input type="checkbox"/>	User 102 Closing <input type="checkbox"/>
User 007 Closing <input type="checkbox"/>	User 039 Closing <input type="checkbox"/>	User 071 Closing <input type="checkbox"/>	User 103 Closing <input type="checkbox"/>
User 008 Closing <input type="checkbox"/>	User 040 Closing <input type="checkbox"/>	User 072 Closing <input type="checkbox"/>	User 104 Closing <input type="checkbox"/>
User 009 Closing <input type="checkbox"/>	User 041 Closing <input type="checkbox"/>	User 073 Closing <input type="checkbox"/>	User 105 Closing <input type="checkbox"/>
User 010 Closing <input type="checkbox"/>	User 042 Closing <input type="checkbox"/>	User 074 Closing <input type="checkbox"/>	User 106 Closing <input type="checkbox"/>
User 011 Closing <input type="checkbox"/>	User 043 Closing <input type="checkbox"/>	User 075 Closing <input type="checkbox"/>	User 107 Closing <input type="checkbox"/>
User 012 Closing <input type="checkbox"/>	User 044 Closing <input type="checkbox"/>	User 076 Closing <input type="checkbox"/>	User 108 Closing <input type="checkbox"/>
User 013 Closing <input type="checkbox"/>	User 045 Closing <input type="checkbox"/>	User 077 Closing <input type="checkbox"/>	User 109 Closing <input type="checkbox"/>
User 014 Closing <input type="checkbox"/>	User 046 Closing <input type="checkbox"/>	User 078 Closing <input type="checkbox"/>	User 110 Closing <input type="checkbox"/>
User 015 Closing <input type="checkbox"/>	User 047 Closing <input type="checkbox"/>	User 079 Closing <input type="checkbox"/>	User 111 Closing <input type="checkbox"/>
User 016 Closing <input type="checkbox"/>	User 048 Closing <input type="checkbox"/>	User 080 Closing <input type="checkbox"/>	User 112 Closing <input type="checkbox"/>
User 017 Closing <input type="checkbox"/>	User 049 Closing <input type="checkbox"/>	User 081 Closing <input type="checkbox"/>	User 113 Closing <input type="checkbox"/>
User 018 Closing <input type="checkbox"/>	User 050 Closing <input type="checkbox"/>	User 082 Closing <input type="checkbox"/>	User 114 Closing <input type="checkbox"/>
User 019 Closing <input type="checkbox"/>	User 051 Closing <input type="checkbox"/>	User 083 Closing <input type="checkbox"/>	User 115 Closing <input type="checkbox"/>
User 020 Closing <input type="checkbox"/>	User 052 Closing <input type="checkbox"/>	User 084 Closing <input type="checkbox"/>	User 116 Closing <input type="checkbox"/>
User 021 Closing <input type="checkbox"/>	User 053 Closing <input type="checkbox"/>	User 085 Closing <input type="checkbox"/>	User 117 Closing <input type="checkbox"/>
User 022 Closing <input type="checkbox"/>	User 054 Closing <input type="checkbox"/>	User 086 Closing <input type="checkbox"/>	User 118 Closing <input type="checkbox"/>
User 023 Closing <input type="checkbox"/>	User 055 Closing <input type="checkbox"/>	User 087 Closing <input type="checkbox"/>	User 119 Closing <input type="checkbox"/>
User 024 Closing <input type="checkbox"/>	User 056 Closing <input type="checkbox"/>	User 088 Closing <input type="checkbox"/>	User 120 Closing <input type="checkbox"/>
User 025 Closing <input type="checkbox"/>	User 057 Closing <input type="checkbox"/>	User 089 Closing <input type="checkbox"/>	User 121 Closing <input type="checkbox"/>
User 026 Closing <input type="checkbox"/>	User 058 Closing <input type="checkbox"/>	User 090 Closing <input type="checkbox"/>	User 122 Closing <input type="checkbox"/>
User 027 Closing <input type="checkbox"/>	User 059 Closing <input type="checkbox"/>	User 091 Closing <input type="checkbox"/>	User 123 Closing <input type="checkbox"/>
User 028 Closing <input type="checkbox"/>	User 060 Closing <input type="checkbox"/>	User 092 Closing <input type="checkbox"/>	User 124 Closing <input type="checkbox"/>
User 029 Closing <input type="checkbox"/>	User 061 Closing <input type="checkbox"/>	User 093 Closing <input type="checkbox"/>	User 125 Closing <input type="checkbox"/>
User 030 Closing <input type="checkbox"/>	User 062 Closing <input type="checkbox"/>	User 094 Closing <input type="checkbox"/>	User 126 Closing <input type="checkbox"/>
User 031 Closing <input type="checkbox"/>	User 063 Closing <input type="checkbox"/>	User 095 Closing <input type="checkbox"/>	User 127 Closing <input type="checkbox"/>
User 032 Closing <input type="checkbox"/>	User 064 Closing <input type="checkbox"/>	User 096 Closing <input type="checkbox"/>	User 128 Closing <input type="checkbox"/>

■ Misc Closings (0) ▶ (04) ▶ (3) ▶ (14)

Quick Arm Partial Closing Auto Arm Abort Auto Arm Closing Keypad Lock Out

■ **Partition Close** (0) ▶ (04) ▶ (3) ▶ (15)

Partition 1 Clos Partition 2 Clos Partition 3 Clos Partition 4 Clos

■ **Openings** (0) ▶ (04) ▶ (3) ▶ (16)

User 001 Opening <input type="checkbox"/>	User 033 Opening <input type="checkbox"/>	User 065 Opening <input type="checkbox"/>	User 097 Opening <input type="checkbox"/>
User 002 Opening <input type="checkbox"/>	User 034 Opening <input type="checkbox"/>	User 066 Opening <input type="checkbox"/>	User 098 Opening <input type="checkbox"/>
User 003 Opening <input type="checkbox"/>	User 035 Opening <input type="checkbox"/>	User 067 Opening <input type="checkbox"/>	User 099 Opening <input type="checkbox"/>
User 004 Opening <input type="checkbox"/>	User 036 Opening <input type="checkbox"/>	User 068 Opening <input type="checkbox"/>	User 100 Opening <input type="checkbox"/>
User 005 Opening <input type="checkbox"/>	User 037 Opening <input type="checkbox"/>	User 069 Opening <input type="checkbox"/>	User 101 Opening <input type="checkbox"/>
User 006 Opening <input type="checkbox"/>	User 038 Opening <input type="checkbox"/>	User 070 Opening <input type="checkbox"/>	User 102 Opening <input type="checkbox"/>
User 007 Opening <input type="checkbox"/>	User 039 Opening <input type="checkbox"/>	User 071 Opening <input type="checkbox"/>	User 103 Opening <input type="checkbox"/>
User 008 Opening <input type="checkbox"/>	User 040 Opening <input type="checkbox"/>	User 072 Opening <input type="checkbox"/>	User 104 Opening <input type="checkbox"/>
User 009 Opening <input type="checkbox"/>	User 041 Opening <input type="checkbox"/>	User 073 Opening <input type="checkbox"/>	User 105 Opening <input type="checkbox"/>
User 010 Opening <input type="checkbox"/>	User 042 Opening <input type="checkbox"/>	User 074 Opening <input type="checkbox"/>	User 106 Opening <input type="checkbox"/>
User 011 Opening <input type="checkbox"/>	User 043 Opening <input type="checkbox"/>	User 075 Opening <input type="checkbox"/>	User 107 Opening <input type="checkbox"/>
User 012 Opening <input type="checkbox"/>	User 044 Opening <input type="checkbox"/>	User 076 Opening <input type="checkbox"/>	User 108 Opening <input type="checkbox"/>
User 013 Opening <input type="checkbox"/>	User 045 Opening <input type="checkbox"/>	User 077 Opening <input type="checkbox"/>	User 109 Opening <input type="checkbox"/>
User 014 Opening <input type="checkbox"/>	User 046 Opening <input type="checkbox"/>	User 078 Opening <input type="checkbox"/>	User 110 Opening <input type="checkbox"/>
User 015 Opening <input type="checkbox"/>	User 047 Opening <input type="checkbox"/>	User 079 Opening <input type="checkbox"/>	User 111 Opening <input type="checkbox"/>
User 016 Opening <input type="checkbox"/>	User 048 Opening <input type="checkbox"/>	User 080 Opening <input type="checkbox"/>	User 112 Opening <input type="checkbox"/>
User 017 Opening <input type="checkbox"/>	User 049 Opening <input type="checkbox"/>	User 081 Opening <input type="checkbox"/>	User 113 Opening <input type="checkbox"/>
User 018 Opening <input type="checkbox"/>	User 050 Opening <input type="checkbox"/>	User 082 Opening <input type="checkbox"/>	User 114 Opening <input type="checkbox"/>
User 019 Opening <input type="checkbox"/>	User 051 Opening <input type="checkbox"/>	User 083 Opening <input type="checkbox"/>	User 115 Opening <input type="checkbox"/>
User 020 Opening <input type="checkbox"/>	User 052 Opening <input type="checkbox"/>	User 084 Opening <input type="checkbox"/>	User 116 Opening <input type="checkbox"/>
User 021 Opening <input type="checkbox"/>	User 053 Opening <input type="checkbox"/>	User 085 Opening <input type="checkbox"/>	User 117 Opening <input type="checkbox"/>
User 022 Opening <input type="checkbox"/>	User 054 Opening <input type="checkbox"/>	User 086 Opening <input type="checkbox"/>	User 118 Opening <input type="checkbox"/>
User 023 Opening <input type="checkbox"/>	User 055 Opening <input type="checkbox"/>	User 087 Opening <input type="checkbox"/>	User 119 Opening <input type="checkbox"/>
User 024 Opening <input type="checkbox"/>	User 056 Opening <input type="checkbox"/>	User 088 Opening <input type="checkbox"/>	User 120 Opening <input type="checkbox"/>
User 025 Opening <input type="checkbox"/>	User 057 Opening <input type="checkbox"/>	User 089 Opening <input type="checkbox"/>	User 121 Opening <input type="checkbox"/>
User 026 Opening <input type="checkbox"/>	User 058 Opening <input type="checkbox"/>	User 090 Opening <input type="checkbox"/>	User 122 Opening <input type="checkbox"/>
User 027 Opening <input type="checkbox"/>	User 059 Opening <input type="checkbox"/>	User 091 Opening <input type="checkbox"/>	User 123 Opening <input type="checkbox"/>
User 028 Opening <input type="checkbox"/>	User 060 Opening <input type="checkbox"/>	User 092 Opening <input type="checkbox"/>	User 124 Opening <input type="checkbox"/>
User 029 Opening <input type="checkbox"/>	User 061 Opening <input type="checkbox"/>	User 093 Opening <input type="checkbox"/>	User 125 Opening <input type="checkbox"/>
User 030 Opening <input type="checkbox"/>	User 062 Opening <input type="checkbox"/>	User 094 Opening <input type="checkbox"/>	User 126 Opening <input type="checkbox"/>
User 031 Opening <input type="checkbox"/>	User 063 Opening <input type="checkbox"/>	User 095 Opening <input type="checkbox"/>	User 127 Opening <input type="checkbox"/>
User 032 Opening <input type="checkbox"/>	User 064 Opening <input type="checkbox"/>	User 096 Opening <input type="checkbox"/>	User 128 Opening <input type="checkbox"/>

■ **Misc Opening** (0) ▶ (04) ▶ (3) ▶ (17)

Open After Alarm Open Automatic

■ **Partition Open** (0) ▶ (04) ▶ (3) ▶ (18)

Partition 1 Open Partition 2 Open Partition 3 Open Partition 4 Open

■ **System Maint** (0) ▶ (04) ▶ (3) ▶ (19)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	TLM Restoral Line 2	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Line Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	FTC Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Main Bell Troub	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Periodic Test	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Main Aux Troub	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Buf Near Full	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Battery Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	User System Test	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Line Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LINKS Test	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Main Bell Rest	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Per UL Test	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> *
Main Aux Rest	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	DLS Lead In	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
COMBUS Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	DLS Lead Out	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
COMBUS Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Ins Lead In	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
TLM Failure	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Ins Lead Out	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
TLM Failure Line 2	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Automation Fault	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
TLM Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Auto. Fault Rest	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

* The default reporting code is 99.

■ **4204 Mod Maint** (0) ▶ (04) ▶ (3) ▶ (20)

- 1st 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (01)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Battery Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	AC Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Aux Sup Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Aux Sup Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

- 2nd 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (02)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Battery Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	AC Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Aux Sup Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Aux Sup Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

- 3rd 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (03)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Battery Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	AC Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Aux Sup Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Aux Sup Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

- 4th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (04)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Battery Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	AC Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Aux Sup Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Aux Sup Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

- 5th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (05)

Battery Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Battery Restoral	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
AC Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	AC Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Aux Sup Trouble	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Aux Sup Restore	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

- 6th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (06)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 7th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (07)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 8th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (08)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 9th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (09)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 10th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (10)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 11th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (11)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

- 12th 4204 (0) ▶ (04) ▶ (3) ▶ (20) ▶ (12)

Battery Trouble

AC Trouble

Aux Sup Trouble

Battery Restoral

AC Restore

Aux Sup Restore

■ **4400 Mod Maint** (0) ▶ (04) ▶ (3) ▶ (21)

RS232 Trouble

DVAC Trouble

RS232 Restore

DVAC Restore

■ **2nd Master Close** (0) ▶ (04) ▶ (3) ▶ (22)

■ **2nd Master Open** (0) ▶ (04) ▶ (3) ▶ (23)

■ **PC4700 Module** (0) ▶ (04) ▶ (3) ▶ (24)

2 Wire Alarm	<input type="text"/>	2 Wire TBL Rest.	<input type="text"/>
2 Wire Restore	<input type="text"/>	Waterflow TBL	<input type="text"/>
Waterflow Alarm	<input type="text"/>	Waterflw TBL Rest	<input type="text"/>
Waterflow Rest	<input type="text"/>	Ground Fault	<input type="text"/>
2 Wire Trouble	<input type="text"/>	Ground FLT Rest.	<input type="text"/>

■ **Police Code Alarm** (0) ▶ (04) ▶ (3) ▶ (25)

Par 1 Police Cd Par 2 Police Cd Par 3 Police Cd Par 4 Police Cd

■ **Police Code Rest** (0) ▶ (04) ▶ (3) ▶ (26)

Par 1 Police Rst Par 2 Police Rst Par 3 Police Rst Par 4 Police Rst

Links Module (0) ▶ (04) ▶ (4)

■ **1st Number** (31 digits max.) (0) ▶ (04) ▶ (4) ▶ (0)

■ **2nd Number** (31 digits max.) (0) ▶ (04) ▶ (4) ▶ (1)

■ **3rd Number** (31 digits max.) (0) ▶ (04) ▶ (4) ▶ (2)

■ **DLS Number** (31 digits max.) (0) ▶ (04) ▶ (4) ▶ (3)

■ **Links Toggles** (0) ▶ (04) ▶ (4) ▶ (4)

Default

Links Module	No	Yes/No	<input type="text"/>	(0) ▶ (04) ▶ (4) ▶ (1)
Periodic Tx	No	Yes/No	<input type="text"/>	(0) ▶ (04) ▶ (4) ▶ (2)
Zone 1 Supervisory	No	Yes/No	<input type="text"/>	(0) ▶ (04) ▶ (4) ▶ (3)
Zone 2 Answer	No	Yes/No	<input type="text"/>	(0) ▶ (04) ▶ (4) ▶ (4)

■ **Tx Cycle Days** (000 - 255) 030 (0) ▶ (04) ▶ (4) ▶ (5)

■ **Tx Cycle Time** (HH:MM) 0000 (0) ▶ (04) ▶ (4) ▶ (6)

■ 4204 Options (0) ▶ (07) ▶ (1) ▶ (01)→(12)

01	Partition	Schedule	Pulse	07	Partition	Schedule	Pulse				
No.	Output	1 2 3 4	Zone	#	Timer	No.	Output	1 2 3 4	Zone	#	Timer
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
02						08					
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
03						09					
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
04						10					
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
05						11					
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
06						12					
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

List of Output Options:

- | | | | |
|-----------------------|----------------------|-----------------------|----------------------|
| [00] Fire and Burg | [09] Latched Strobe | [18] Kissoff Output | [27] Entry Follow |
| [01] Inv Fire/Burg | [10] Trouble Output | [19] COMBUS Power | [28] Date Schedule |
| [02] Burg Only | [11] Courtesy Pulse | [20] Ready Status | [29] Zone Tamper |
| [03] Inv Burg Only | [12] Chime Follower | [21] Zone Alarm | [30] Zone Fault |
| [04] Fire Only | [13] TLM Only | [22] Zone Follow | [31] Zn Tmp Follow |
| [05] Inv Fire Only | [14] TLM and Alarm | [23] Duress Output | [32] Zn Fault Follow |
| [06] Utility Output | [15] Failure to Comm | [24] Buzzer Follow | [33] Armed Home Mode |
| [07] Sensor Reset | [16] Comms Active | [25] Remote Operation | [34] Armed Away Mode |
| [08] Partition Status | [17] Ground Start | [26] Exit Follow | |

■ **4216 Options** (0) ▶ (07) ▶ (2) ▶ (1)→(9)

Module	Output	Module	Output	Module	Output
01	_____	04	_____	07	_____
02	_____	05	_____	08	_____
03	_____	06	_____	09	_____

List of Output Options:

[01]Custom Group 1	[06]Custom Group 6	[11]Alarms 17-32	[16]Alarms 97-112	[21]Follow 49-64
[02]Custom Group 2	[07]Custom Group 7	[12]Alarms 33-48	[17]Alarms 113-128	[22]Follow 65-80
[03]Custom Group 3	[08]Custom Group 8	[13]Alarms 49-64	[18]Follow 1-16	[23]Follow 81-96
[04]Custom Group 4	[09]Custom Group 9	[14]Alarms 65-80	[19]Follow 17-32	[24]Follow 97-112
[05]Custom Group 5	[10]Alarms 1-16	[15]Alarms 81-96	[20]Follow 33-48	[25]Follow 113-128

■ **4216 Custom** (0) ▶ (07) ▶ (3) ▶ (01)→(09)

Custom Group 01

No.	Output	Partition				Zone	Schedule #	Pulse Timer	No.	Output	Partition				Zone	Schedule #	Pulse Timer
		1	2	3	4						1	2	3	4			
01	_____	_____	_____	_____	_____	_____	_____	09	_____	_____	_____	_____	_____	_____	_____		
02	_____	_____	_____	_____	_____	_____	_____	10	_____	_____	_____	_____	_____	_____	_____		
03	_____	_____	_____	_____	_____	_____	_____	11	_____	_____	_____	_____	_____	_____	_____		
04	_____	_____	_____	_____	_____	_____	_____	12	_____	_____	_____	_____	_____	_____	_____		
05	_____	_____	_____	_____	_____	_____	_____	13	_____	_____	_____	_____	_____	_____	_____		
06	_____	_____	_____	_____	_____	_____	_____	14	_____	_____	_____	_____	_____	_____	_____		
07	_____	_____	_____	_____	_____	_____	_____	15	_____	_____	_____	_____	_____	_____	_____		
08	_____	_____	_____	_____	_____	_____	_____	16	_____	_____	_____	_____	_____	_____	_____		

Custom Group 02

01	_____	_____	_____	_____	_____	_____	_____	09	_____	_____	_____	_____	_____	_____	_____
02	_____	_____	_____	_____	_____	_____	_____	10	_____	_____	_____	_____	_____	_____	_____
03	_____	_____	_____	_____	_____	_____	_____	11	_____	_____	_____	_____	_____	_____	_____
04	_____	_____	_____	_____	_____	_____	_____	12	_____	_____	_____	_____	_____	_____	_____
05	_____	_____	_____	_____	_____	_____	_____	13	_____	_____	_____	_____	_____	_____	_____
06	_____	_____	_____	_____	_____	_____	_____	14	_____	_____	_____	_____	_____	_____	_____
07	_____	_____	_____	_____	_____	_____	_____	15	_____	_____	_____	_____	_____	_____	_____
08	_____	_____	_____	_____	_____	_____	_____	16	_____	_____	_____	_____	_____	_____	_____

Custom Group 03

01	_____	_____	_____	_____	_____	_____	_____	09	_____	_____	_____	_____	_____	_____	_____
02	_____	_____	_____	_____	_____	_____	_____	10	_____	_____	_____	_____	_____	_____	_____
03	_____	_____	_____	_____	_____	_____	_____	11	_____	_____	_____	_____	_____	_____	_____
04	_____	_____	_____	_____	_____	_____	_____	12	_____	_____	_____	_____	_____	_____	_____
05	_____	_____	_____	_____	_____	_____	_____	13	_____	_____	_____	_____	_____	_____	_____
06	_____	_____	_____	_____	_____	_____	_____	14	_____	_____	_____	_____	_____	_____	_____
07	_____	_____	_____	_____	_____	_____	_____	15	_____	_____	_____	_____	_____	_____	_____
08	_____	_____	_____	_____	_____	_____	_____	16	_____	_____	_____	_____	_____	_____	_____

Custom Group 04

No.	Output	Partition				Zone	Schedule #	Pulse Timer	No.	Output	Partition				Zone	Schedule #	Pulse Timer
		1	2	3	4						1	2	3	4			
01								09									
02								10									
03								11									
04								12									
05								13									
06								14									
07								15									
08								16									

Custom Group 05

01								09								
02								10								
03								11								
04								12								
05								13								
06								14								
07								15								
08								16								

Custom Group 06

01								09								
02								10								
03								11								
04								12								
05								13								
06								14								
07								15								
08								16								

List of Output Options:

- | | | | |
|-----------------------|----------------------|-----------------------|----------------------|
| [00] Fire and Burg | [09] Latched Strobe | [18] Kissoff Output | [27] Entry Follow |
| [01] Inv Fire/Burg | [10] Trouble Output | [19] COMBUS Power | [28] Date Schedule |
| [02] Burg Only | [11] Courtesy Pulse | [20] Ready Status | [29] Zone Tamper |
| [03] Inv Burg Only | [12] Chime Follower | [21] Zone Alarm | [30] Zone Fault |
| [04] Fire Only | [13] TLM Only | [22] Zone Follow | [31] Zn Tmp Follow |
| [05] Inv Fire Only | [14] TLM and Alarm | [23] Duress Output | [32] Zn Fault Follow |
| [06] Utility Output | [15] Failure to Comm | [24] Buzzer Follow | [33] Armed Home Mode |
| [07] Sensor Reset | [16] Comms Active | [25] Remote Operation | [34] Armed Away Mode |
| [08] Partition Status | [17] Ground Start | [26] Exit Follow | |

Custom Group 07

No.	Output	Partition				Zone	Schedule #	Pulse Timer	No.	Output	Partition				Zone	Schedule #	Pulse Timer
		1	2	3	4						1	2	3	4			
01								09									
02								10									
03								11									
04								12									
05								13									
06								14									
07								15									
08								16									

Custom Group 08

01								09								
02								10								
03								11								
04								12								
05								13								
06								14								
07								15								
08								16								

Custom Group 09

01								09								
02								10								
03								11								
04								12								
05								13								
06								14								
07								15								
08								16								

List of Output Options:

- | | | | |
|-----------------------|----------------------|-----------------------|----------------------|
| [00] Fire and Burg | [09] Latched Strobe | [18] Kissoff Output | [27] Entry Follow |
| [01] Inv Fire/Burg | [10] Trouble Output | [19] COMBUS Power | [28] Date Schedule |
| [02] Burg Only | [11] Courtesy Pulse | [20] Ready Status | [29] Zone Tamper |
| [03] Inv Burg Only | [12] Chime Follower | [21] Zone Alarm | [30] Zone Fault |
| [04] Fire Only | [13] TLM Only | [22] Zone Follow | [31] Zn Tmp Follow |
| [05] Inv Fire Only | [14] TLM and Alarm | [23] Duress Output | [32] Zn Fault Follow |
| [06] Utility Output | [15] Failure to Comm | [24] Buzzer Follow | [33] Armed Home Mode |
| [07] Sensor Reset | [16] Comms Active | [25] Remote Operation | [34] Armed Away Mode |
| [08] Partition Status | [17] Ground Start | [26] Exit Follow | |

■ **4580 Automation Items** (0) ▶ (07) ▶ (4)

No.	Output	Partition				Zone	Schedule #	Pulse Timer	No.	Output	Partition				Zone	Schedule #	Pulse Timer
		1	2	3	4						1	2	3	4			
01								17									
02								18									
03								19									
04								20									
05								21									
06								22									
07								23									
08								24									
09								25									
10								26									
11								27									
12								28									
13								29									
14								30									
15								31									
16								32									

List of Output Options:

[00] Fire and Burg	[09] Latched Strobe	[18] Kissoff Output	[27] Entry Follow
[01] Inv Fire/Burg	[10] Trouble Output	[19] COMBUS Power	[28] Date Schedule
[02] Burg Only	[11] Courtesy Pulse	[20] Ready Status	[29] Zone Tamper
[03] Inv Burg Only	[12] Chime Follower	[21] Zone Alarm	[30] Zone Fault
[04] Fire Only	[13] TLM Only	[22] Zone Follow	[31] Zn Tmp Follow
[05] Inv Fire Only	[14] TLM and Alarm	[23] Duress Output	[32] Zn Fault Follow
[06] Utility Output	[15] Failure to Comm	[24] Buzzer Follow	[33] Armed Home Mode
[07] Sensor Reset	[16] Comms Active	[25] Remote Operation	[34] Armed Away Mode
[08] Partition Status	[17] Ground Start	[26] Exit Follow	

■ **PGM Pulse Times (000 - 255 secs.)** (0) ▶ (07) ▶ (5)

	Default		
Utlity/Sensor	005	(0) ▶ (07) ▶ (5) ▶ (0)	Chime Pulse
Kissoff Output	003	(0) ▶ (07) ▶ (5) ▶ (1)	Duress Pulse
Ground Start	002	(0) ▶ (07) ▶ (5) ▶ (2)	

■ **PC4400 Options** (0) ▶ (08) Default

Baud Rate	(0) ▶ (08) ▶ (0)	1200
<input type="checkbox"/> 300	(0) ▶ (08) ▶ (0) ▶ (0)	<input type="checkbox"/> 1200 (0) ▶ (08) ▶ (0) ▶ (2)
<input type="checkbox"/> 600	(0) ▶ (08) ▶ (0) ▶ (1)	<input type="checkbox"/> 2400 (0) ▶ (08) ▶ (0) ▶ (3)
<input type="checkbox"/> 4800	(0) ▶ (08) ▶ (0) ▶ (4)	
Handshake	(0) ▶ (08) ▶ (1)	<u>Default</u>
Handshake Off	No	Yes/No <input type="checkbox"/>

■ **System Label** (0) ▶ (09)

Default
 S y s t e m A r e a

■ **Date Schedules** (0) ▶ (10) ▶ (1)

	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 01															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 02															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 03															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 04															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 05															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 06															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 07															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Schedule 08															
Interval 1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Interval 4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 09															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 10															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 11															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 12															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 13															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 14															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 15															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 16															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 17															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 18															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 19															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 20															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 21															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 22															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 23															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 24															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 25															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 26															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 27															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 28															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 29															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 30															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 31															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 32															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 33															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 34															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 35															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 36															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 37															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 38															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 39															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 40															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 41															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 42															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 43															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 44															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 45															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 46															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 47															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 48															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 49															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 50															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 51															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 52															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 53															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 54															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 55															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 56															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 57															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 58															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 59															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 60															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 61															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 62															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 63															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 64															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 65															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 66															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 67															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 68															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 69															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 70															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 71															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 72															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 73															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 74															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 75															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 76															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 77															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 78															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 79															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 80															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 81															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 82															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 83															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 84															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 85															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 86															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 87															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 88															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 89															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

Schedule	Start Time (HH:MM)	End Time (HH:MM)	Day							Holiday				AutoArm Y/N	AutoDisarm Y/N
			S	M	T	W	T	F	S	1	2	3	4		
Schedule 90															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 91															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 92															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 93															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 94															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 95															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 96															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 97															
Interval 1															
Interval 2															
Interval 3															
Interval 4															
Schedule 98															
Interval 1															
Interval 2															
Interval 3															
Interval 4															

05/01	_____	06/01	_____	07/01	_____	08/01	_____
05/02	_____	06/02	_____	07/02	_____	08/02	_____
05/03	_____	06/03	_____	07/03	_____	08/03	_____
05/04	_____	06/04	_____	07/04	_____	08/04	_____
05/05	_____	06/05	_____	07/05	_____	08/05	_____
05/06	_____	06/06	_____	07/06	_____	08/06	_____
05/07	_____	06/07	_____	07/07	_____	08/07	_____
03/08	_____	06/08	_____	07/08	_____	03/08	_____
05/09	_____	06/09	_____	07/09	_____	08/09	_____
05/10	_____	06/10	_____	07/10	_____	08/10	_____
05/11	_____	06/11	_____	07/11	_____	08/11	_____
05/12	_____	06/12	_____	07/12	_____	08/12	_____
05/13	_____	06/13	_____	07/13	_____	08/13	_____
05/14	_____	06/14	_____	07/14	_____	08/14	_____
05/15	_____	06/15	_____	07/15	_____	08/15	_____
05/16	_____	06/16	_____	07/16	_____	08/16	_____
05/17	_____	06/17	_____	07/17	_____	08/17	_____
05/18	_____	06/18	_____	07/18	_____	08/18	_____
05/19	_____	06/19	_____	07/19	_____	08/19	_____
05/20	_____	06/20	_____	07/20	_____	08/20	_____
05/21	_____	06/21	_____	07/21	_____	08/21	_____
05/22	_____	06/22	_____	07/22	_____	08/22	_____
05/23	_____	06/23	_____	07/23	_____	08/23	_____
05/24	_____	06/24	_____	07/24	_____	08/24	_____
05/25	_____	06/25	_____	07/25	_____	08/25	_____
05/26	_____	06/26	_____	07/26	_____	08/26	_____
05/27	_____	06/27	_____	07/27	_____	08/27	_____
05/28	_____	06/28	_____	07/28	_____	08/28	_____
05/29	_____	06/29	_____	07/29	_____	08/29	_____
05/30	_____	06/30	_____	07/30	_____	08/30	_____
05/31	_____			07/31	_____	08/31	_____

03/01	_____	10/01	_____	11/01	_____	12/01	_____
09/02	_____	10/02	_____	11/02	_____	12/02	_____
09/03	_____	10/03	_____	11/03	_____	12/03	_____
09/04	_____	10/04	_____	11/04	_____	12/04	_____
09/05	_____	10/05	_____	11/05	_____	12/05	_____
09/06	_____	10/06	_____	11/06	_____	12/06	_____
09/07	_____	10/07	_____	11/07	_____	12/07	_____
09/08	_____	10/08	_____	11/08	_____	12/08	_____
09/09	_____	10/09	_____	11/09	_____	12/09	_____
09/10	_____	10/10	_____	11/10	_____	12/10	_____
09/11	_____	10/11	_____	11/11	_____	12/11	_____
09/12	_____	10/12	_____	11/12	_____	12/12	_____
09/13	_____	10/13	_____	11/13	_____	12/13	_____
09/14	_____	10/14	_____	11/14	_____	12/14	_____
09/15	_____	10/15	_____	11/15	_____	12/15	_____
09/16	_____	10/16	_____	11/16	_____	12/16	_____
09/17	_____	10/17	_____	11/17	_____	12/17	_____
09/18	_____	10/18	_____	11/18	_____	12/18	_____
09/19	_____	10/19	_____	11/19	_____	12/19	_____
09/20	_____	10/20	_____	11/20	_____	12/20	_____
09/21	_____	10/21	_____	11/21	_____	12/21	_____
09/22	_____	10/22	_____	11/22	_____	12/22	_____
09/23	_____	10/23	_____	11/23	_____	12/23	_____
09/24	_____	10/24	_____	11/24	_____	12/24	_____
09/25	_____	10/25	_____	11/25	_____	12/25	_____
09/26	_____	10/26	_____	11/26	_____	12/26	_____
09/27	_____	10/27	_____	11/27	_____	12/27	_____
09/28	_____	10/28	_____	11/28	_____	12/28	_____
09/29	_____	10/29	_____	11/29	_____	12/29	_____
09/30	_____	10/30	_____	11/30	_____	12/30	_____
		10/31	_____			12/31	_____

■ **Arm/Disarm Sched** (0) ▶ (10) ▶ (3) ▶ (01)→(50)

Date		Patition				Date		Patition				Date		Patition				Date		Patition			
Schedule #		1	2	3	4	Schedule #		1	2	3	4	Schedule #		1	2	3	4	Schedule #		1	2	3	4
01	_____	_____	_____	_____	_____	14	_____	_____	_____	_____	_____	27	_____	_____	_____	_____	_____	39	_____	_____	_____	_____	_____
02	_____	_____	_____	_____	_____	15	_____	_____	_____	_____	_____	28	_____	_____	_____	_____	_____	40	_____	_____	_____	_____	_____
03	_____	_____	_____	_____	_____	16	_____	_____	_____	_____	_____	29	_____	_____	_____	_____	_____	41	_____	_____	_____	_____	_____
04	_____	_____	_____	_____	_____	17	_____	_____	_____	_____	_____	30	_____	_____	_____	_____	_____	42	_____	_____	_____	_____	_____
05	_____	_____	_____	_____	_____	18	_____	_____	_____	_____	_____	31	_____	_____	_____	_____	_____	43	_____	_____	_____	_____	_____
06	_____	_____	_____	_____	_____	19	_____	_____	_____	_____	_____	32	_____	_____	_____	_____	_____	44	_____	_____	_____	_____	_____
07	_____	_____	_____	_____	_____	20	_____	_____	_____	_____	_____	33	_____	_____	_____	_____	_____	45	_____	_____	_____	_____	_____
08	_____	_____	_____	_____	_____	21	_____	_____	_____	_____	_____	34	_____	_____	_____	_____	_____	46	_____	_____	_____	_____	_____
09	_____	_____	_____	_____	_____	22	_____	_____	_____	_____	_____	35	_____	_____	_____	_____	_____	47	_____	_____	_____	_____	_____
10	_____	_____	_____	_____	_____	23	_____	_____	_____	_____	_____	36	_____	_____	_____	_____	_____	48	_____	_____	_____	_____	_____
11	_____	_____	_____	_____	_____	24	_____	_____	_____	_____	_____	37	_____	_____	_____	_____	_____	49	_____	_____	_____	_____	_____
12	_____	_____	_____	_____	_____	25	_____	_____	_____	_____	_____	38	_____	_____	_____	_____	_____	50	_____	_____	_____	_____	_____
13	_____	_____	_____	_____	_____	26	_____	_____	_____	_____	_____												

Customer ID Code

Default: FFFF

- Partition 1 I.D. Code _____ (1) ▶ (0) ▶ (1) ▶ (0)
- Partition 2 I.D. Code _____ (1) ▶ (0) ▶ (2) ▶ (0)
- Partition 3 I.D. Code _____ (1) ▶ (0) ▶ (3) ▶ (0)
- Partition 4 I.D. Code _____ (1) ▶ (0) ▶ (4) ▶ (0)

Partition Toggles (1) ▶ (0) ▶ (1)→(4) ▶ (1)

Default: YYYY	Partition				Default: NNNN	Partition				Default: NNNN	Partition			
	1	2	3	4		1	2	3	4		1	2	3	4
■ [F] Enabled	_____	_____	_____	_____	■ Abort Req Code	_____	_____	_____	_____	■ Squawk Ex.Del	_____	_____	_____	_____
■ [A] Enabled	_____	_____	_____	_____	■ Auto Arm Squawk	_____	_____	_____	_____	■ Aud.Exit Fault	_____	_____	_____	_____
■ [P] Enabled	_____	_____	_____	_____	■ Bell Squawk On	_____	_____	_____	_____	■ Urg.Entry Del	_____	_____	_____	_____
■ Display Clock	_____	_____	_____	_____	■ Kypd Lockout?	_____	_____	_____	_____	■ Squawk En.Del	_____	_____	_____	_____
■ Disp Exit Time	_____	_____	_____	_____	■ Util Req Code	_____	_____	_____	_____	■ Exit Del.Term.	_____	_____	_____	_____
■ Bypas Req Code	_____	_____	_____	_____	■ Sen Res Req CD	_____	_____	_____	_____	■ Glob Alm Annun.	_____	_____	_____	_____
■ AutoArm/Dis	_____	_____	_____	_____	■ User FN Any CD	_____	_____	_____	_____	■ Full Sys Stat	_____	_____	_____	_____
					■ Aud.Exit Urgen	_____	_____	_____	_____					

Partition Times

(000-255 secs.)	Default	Par1	Par 2	Par 3	Par 4
■ Entry Delay	030				
	(1) ▶ (0) ▶ (1)→(4) ▶ (2) ▶ (0)				
■ Exit Delay	120				
	(1) ▶ (0) ▶ (1)→(4) ▶ (2) ▶ (1)				
■ Aux Entry Delay	045				
	(1) ▶ (0) ▶ (1)→(4) ▶ (2) ▶ (2)				
■ Aux Exit Delay	120				
	(1) ▶ (0) ▶ (1)→(4) ▶ (2) ▶ (3)				
■ CTT Time	000				
	(1) ▶ (0) ▶ (1)→(4) ▶ (2) ▶ (4)				

Zone Assignment

System Zone	Partition				Zone Label	Zone Type	Audible	Pulsed	Bypassable	Chime	Force Armable	Swinger Shutdown	TX Delay
	1	2	3	4									
Z1													
Z2													
Z3													
Z4													
Z5													
Z6													
Z7													
Z8													
Z9													
Z10													
Z11													
Z12													
Z13													
Z14													
Z15													
Z16													
Z17													
Z18													
Z19													
Z20													
Z21													

System Zone	Partition				Zone Label	Zone Type	Audible	Pulsed	Bypassable	Chime	Force Armable	Swinger Shutdown	TX Delay
	1	2	3	4									
Z22													
Z23													
Z24													
Z25													
Z26													
Z27													
Z28													
Z29													
Z30													
Z31													
Z32													
Z33													
Z34													
Z35													
Z36													
Z37													
Z38													
Z39													
Z40													
Z41													
Z42													
Z43													
Z44													
Z45													
Z46													
Z47													
Z48													
Z49													
Z50													
Z51													

Zone	System				Partition Zone Label	Zone Type	Audible	Pulsed	Bypassable	Chime	Force Armable	Swinger Shutdown	TX Delay
	1	2	3	4									
Z52													
Z53													
Z54													
Z55													
Z56													
Z57													
Z58													
Z59													
Z60													
Z61													
Z62													
Z63													
Z64													

List of Zone Type Options:

- | | | | |
|---------------------|---------------------|-----------------------|----------------|
| [00]Standard Delay | [06]24 hr Bell | [12]Momentary Arm | [18] Sprinkler |
| [01]Auxiliary Delay | [07]24 hr Bell/Buzz | [13]Maintained Arm | [19]Hold Up |
| [02]Instant | [08]24 hr Buzzer | [14]Latching 24 hr | [20]Panic |
| [03]Interior | [09]Standard Fire | [15]Forced Answer | [21]Technical |
| [04]Int Home Away | [10]Delayed Fire | [16]Links Supervisory | |
| [05]Delay Home Away | [11]Auto Ver Fire | [17]Links Answer | |

- | | | | |
|-------------|--|------------------|--|
| System Zone | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (0) | Bypassable | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) |
| Zone Label | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (0) | Chime | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) |
| Zone Type | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (1) | Force Armable | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) |
| Audible | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) | Swinger Shutdown | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) |
| Pulsed | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) | TX Delay | (1) ▶ (0) ▶ (1) → (4) ▶ (3) ▶ (1) ▶ Which Zone ▶ (2) |

Partition Labels

- Partition 1 Name Label (1) ▶ (0) ▶ (1) ▶ (4)
- Partition 2 Name Label (1) ▶ (0) ▶ (2) ▶ (4)
- Partition 3 Name Label (1) ▶ (0) ▶ (3) ▶ (4)
- Partition 4 Name Label (1) ▶ (0) ▶ (4) ▶ (4)

SYSTEM OVERVIEW

Physical Location	Physical Location
Main Panel _____	Escort4580 _____

PC4700 _____	PC4400 _____
--------------	--------------

Keypad

Global Partition Keypad Physical Location of Module			Global Partition Keypad Physical Location of Module				
01	____	____	_____	05	____	____	_____
02	____	____	_____	06	____	____	_____
03	____	____	_____	07	____	____	_____
04	____	____	_____	08	____	____	_____

PC41XX

Zones Type Assigned 8 16 64 Physical Location of Module			Zones Type Assigned 8 16 64 Physical Location of Module				
01	____	____	_____	05	____	____	_____
02	____	____	_____	06	____	____	_____
03	____	____	_____	07	____	____	_____
04	____	____	_____				

PC4204

Physical Location of Module	Physical Location of Module
01 _____	07 _____
02 _____	08 _____
03 _____	09 _____
04 _____	10 _____
05 _____	11 _____
06 _____	12 _____

PC4216

Lamp Test (Y/N) Physical Location of Module		Lamp Test (Y/N) Physical Location of Module			
01	____	_____	06	____	_____
02	____	_____	07	____	_____
03	____	_____	08	____	_____
04	____	_____	09	____	_____
05	____	_____			

APPENDIX

List of Diagnostics

- E = Communication error
- T = Tamper open
- LV = Low voltage to module

Indicated # Number	For Future Use
1	
2	
3	
4	
5	
6	
7	
8	

Indicated Number	LCD4500 Module
9	1
10	2
11	3
12	4
13	5
14	6
15	7
16	8
17	9
18	10
19	11
20	12
21	13
22	14
23	15
24	16

Indicated Number	PC4400 Serial Interface Module
---------------------	-----------------------------------

25	1
----	---

Indicated Number	PC41XX Zone Module
26	1
27	2
28	3
29	4
30	5
31	6
32	7
33	8
34	9
35	10
36	11
37	12
38	13
39	14
40	For future use15
41	For future use16

Indicated Number	PC4216 O/P Module
42	1
43	2
44	3
45	4
46	5
47	6
48	7
49	8
50	9

Indicated Number	PC4204 O/P Module
51	1
52	2
53	3
54	4
55	5
56	6
57	7
58	8
59	9
60	10
61	11
62	12
63	13
64	14
65	15
66	16

Indicated Number	PC4700 Fire Module
67	1

Indicated Number	Escort4580 Voice Prompting Module
68	1



© 1996 Digital Security Controls Ltd.
1645 Flint Road, Downsview, Ontario, Canada M3J 2J6
(416) 665-8460 • 1-800-387-3630
Printed in Canada 29002028 R0

Programming Work Sheets

