



No 2015-3019

TEST REPORT

Equipment under Test: Mobile Video Recorder

Model Number: DS-M75XXHNI/XX/YY

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.


Test Standards: EN 50155:2007

Results: PASS

Date of issues: 2015-01-14

NATIONAL COMPUTER PERIPHERAL EQUIPMENT

QUALITY SUPERVISING TEST CENTRE






VERIFICATION OF COMPLIANCE

Equipment under Test:	Mobile Video Recorder
Trade Name:	HIKVISION
Model Number:	DS-M75XXHNI/XX/YY
Serial Number:	N/A
Applicant:	Hangzhou Hikvision Digital Technology Co., Ltd.
Manufacturer:	Hangzhou Hikvision Digital Technology Co., Ltd.
Type of Test:	Entrustment Test
Technical Standards:	EN 50155: 2007; EN 50121-3-2:2006;
Verification Issuing Office Name & Address	National Computer Peripheral Equipment Quality Supervising Test Centre (CPTC) 36# Macheng Road, HangZhou City, Zhejiang Province, China
File Number:	2015-3019
Delivery Date:	2015-01-14
Condition of Test Sample:	Normal



This report shall not be reproduced, except in full, without the written approval of CPTC

The test results of this report relate only to the tested sample identified in this report.

Approved by:  Checked by:  Chief tester: 

Contents

1. GENERAL INFORMATION.....	1
1.1 TEST ITEMS.....	1
1.2 EUT (EQUIPMENT UNDER TEST) INFORMATION	4
1.3 TEST DESCRIPTION	4
1.4 AMBIENT CONDITION FOR TEST	4
1.5 REQUIREMENTS	4
1.6 TEST EQUIPMENT LIST.....	5
2. CONDUCTED EMISSION TEST	7
2.1 TEST STANDARDS.....	7
2.2 DIAGRAM OF TEST SETUP.....	7
2.3 TEST DESCRIPTION	7
2.4 TEST RESULT	10
3. RADIATED EMISSION TEST	11
3.1 TEST STANDARDS.....	11
3.2 DIAGRAM OF TEST SETUP.....	11
3.3 TEST EQUIPMENTS USED	11
3.4 TEST DESCRIPTION	11
3.5 TEST RESULT	13
4. ELECTROSTATIC DISCHARGE TEST	14
4.1 TEST STANDARDS.....	14
4.2 SEVERITY LEVELS AND PERFORMANCE CRITERION	14
4.3 DIAGRAM OF TEST SETUP.....	14
4.4 TEST EQUIPMENTS USED	14
4.5 TEST DESCRIPTION	14
4.6 TEST SETTING.....	15
4.7 TEST RESULT	15
5. RF FIELD STRENGTH SUSCEPTIBILITY TEST	16
5.1 TEST STANDARDS.....	16
5.2 SEVERITY LEVELS AND PERFORMANCE CRITERION	16
5.3 DIAGRAM OF TEST SETUP.....	16
5.4 TEST EQUIPMENT USED.....	16
5.5 TEST DESCRIPTION	16

5.6 TEST SETTING	17
5.7 TEST RESULT	17
6. ELECTRICAL FAST TRANSIENT/BURST TEST	18
6.1 TEST STANDARDS	18
6.2 SEVERITY LEVELS AND PERFORMANCE CRITERION	18
6.3 DIAGRAM OF TEST SETUP	18
6.4 TEST EQUIPMENT USED	19
6.5 TEST DESCRIPTION	19
6.6 TEST SETTING	19
6.7 TEST RESULT	19
7. SURGE TEST	20
7.1 TEST STANDARDS	20
7.2 SEVERITY LEVELS AND PERFORMANCE CRITERION	20
7.3 DIAGRAM OF TEST SETUP	20
7.4 TEST EQUIPMENT USED	20
7.5 TEST DESCRIPTION	20
7.6 TEST SETTING	21
7.7 TEST RESULT	21
8. CONDUCTED SUSCEPTIBILITY TEST	22
8.1 TEST STANDARDS	22
8.2 SEVERITY LEVELS AND PERFORMANCE CRITERION	22
8.3 DIAGRAM OF TEST SETUP	22
8.4 TEST EQUIPMENT USED	22
8.5 TEST DESCRIPTION	22
8.6 TEST SETTING	23
8.7 TEST RESULT	23
9. POWER SUPPLY OVER VOLTAGE	24
9.1 TEST STANDARDS	24
9.2 DIAGRAM OF TEST SETUP	24
9.3 TEST CONFIGURATION AND PROCEDURE	24
9.4 TEST SETTING	24
9.5 TEST RESULT	24
10. VIBRATION TEST	25
10.1 TEST PROCEDURE	26
10.2 ACCEPTANCE CRITERIA	26

10.3 TEST SETTING	26
10.4 TEST RESULT	26
11. SHOCK TEST	27
11.1 TEST PROCEDURE:	27
11.2 ACCEPTANCE CRITERIA	27
11.3 TEST SETTING:	27
11.4 TEST RESULT	27
12. DRY HEAT TEST	28
12.1 TEST PROCEDURES	28
12.2 ACCEPTANCE CRITERIA	28
12.3 TEST SETTING	28
12.3 TEST RESULT	28
13. COOLING TEST	29
13.1 TEST PROCEDURES	29
13.2 ACCEPTANCE CRITERIA	29
13.3 TEST SETTING	29
13.4 TEST RESULT	29

1. General Information

All tests that mentioned in this document are according to the test procedure of EN 50155.

1.1 Test Items

No.	Phenomenon	Basic standard	Severity	Performance Criteria ^①	Result
1.	Conducted Emission	EN 50155 12.2.8.2 EN 50121-3-2 table 5 Ref EN 50155 clause 7	9 kHz – 150 kHz: No limit 150 kHz – 500 kHz: 79 dB V quasi-peak 500 kHz – 30 MHz: 73 dB V quasi-peak	N/A	Pass
2.	Radiated Emission	EN 50155 12.2.8.2 EN 50121-3-2 table 6 Ref EN 50155 clause 7	30 MHz – 230 MHz: 50 dB V/m quasi-peak @3m 230 MHz – 1 GHz: 57 dB V/m quasi-peak @3m	N/A	Pass
3.	ESD	EN 50155 12.2.7.2 EN50121-3-2 table 9 Ref : IEC 61000-4-2	8 KV air discharge 6 KV Contact discharge	A	Pass
4.	Radio frequency	EN 50155 12.2.8.1 EN 50121-3-2 table 9 Ref : IEC 61000-4-3	Electric Field Strengthen (V/m) in rms : 80 MHz to 1GHz 20V/m 1.4GHz to 2.1GHz 10V/m 2.1GHz to 2.7GHz 5V/m Modulation : 80% AM (1kHz) for all ranges	A	Pass

No.	Phenomenon	Basic standard	Severity	Performance Criteria ^①	Result
5.	Fast Transients bursts	EN50155 12.2.7.3 EN50121-3-2 table 7&8 Ref : IEC 61000-4-4 clause 8	+/-2 kV 5/50 ns Tr/Th 5 kHz repetition frequency	A	Pass
6.	Surges	EN 50155 12.2.7.1 EN50121-3-2 table 7 Ref : IEC 61000-4-5 Clause 8	1.2/50 μ s Open circuit test voltage line to ground: +/- 2KV 42 Ω , 0.5 μ F Open circuit test voltage line to line: +/- 1KV 42 Ω , 0.5 μ F	B	Pass
7.	Conducted radio frequency	EN 50155 12.2.8.1 EN 50121-3-2 table 7&8 Ref : IEC 61000-4-6 Clause 8	10 Vrms (carrier voltage) 150 kHz to 80 MHz 1 kHz, 80% AM	A	Pass
8.	Supply Over Voltage	EN 50155 12.2.6	1.4 Un, d=0.1sec, D=1sec, Rs = 1 Ω +/- 10% Trapezoidal overvoltage according to EN50155 12.2.6 a)	A	Pass
9.	Performance Test	EN 50155 12.2.2	0.7Un-1.25Un	N/A	Pass
10.	Vibration Test	EN 50155 12.2.11 EN 61373 table 1 & 2	Category 2 (Bogie mounted) according to EN 61373 table 1 & 2	N/A	Pass
11.	Shock Test	EN 50155 12.2.11 EN 61373 table 3	Category 2 (Bogie mounted) according to EN 61373 table 3	N/A	Pass

1.2 EUT (Equipment Under Test) Information

Name: Mobile Video Recorder

Test Model No.: DS-M75XXHNI/XX/YY

1.3 Test Description

1.3.1 Accessories Used

Name	Model	Manufacturer
Camera	DS-2CD2112-I	Hikvision
LCD monitor	SMT-1722P	Samsung

1.4 Ambient Condition for Test

Item	Required
Temperature (°C)	15~35
Humidity (%RH)	25~75
Barometric Pressure (mbar)	860~1060

1.5 Requirements

1.5.1 EMC test requirements

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

The performance acceptance criteria are defined as: The overall emission level do not exceed the limits.

Immunity: The equipment under test (EUT) was configured to the representative operating mode and conditions.

The performance acceptance criteria are defined as: Meet the Performance Criteria of 1.1.

1.5.2 Environment test requirements

The acceptance criteria are defined as:

- a) No failure or damage shall occur
- b) The functional check shall not show any failure or damage nor any results which are beyond the specified tolerance

1.5.3 Requirements for functional check.

The performance acceptance criteria are defined as:

Correct video and audio signal being received and transmitted.

Slight disturbance, flickering or jittering observed on the preview screen is permitted.

For Surge/ Voltage Dips/ Short Interruption and Voltage Variation Immunity test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
SCHAFFNER/Surge /Dips/Interruption Variations Simulator	NSG2050	DC0011	13/03/2013	12/03/2015

For Cooling/Dry Heat test

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Temperature & Humidity Chamber	ESL-10AGP	SB055	13/03/2014	12/03/2015
Temperature & Humidity Chamber	C/WJS-100L	SB115	13/12/2014	14/12/2015

For Vibration, Shock, and Bump test


Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Vibration	DCS-1000-10-05	SB077	11/06/2014	10/06/2015
Shock and Bump	SB-200	SB112	19/05/2014	18/05/2015

2. Conducted Emission Test

2.1 Test Standards

EN 50155 clause 7

2.2 Diagram of Test Setup

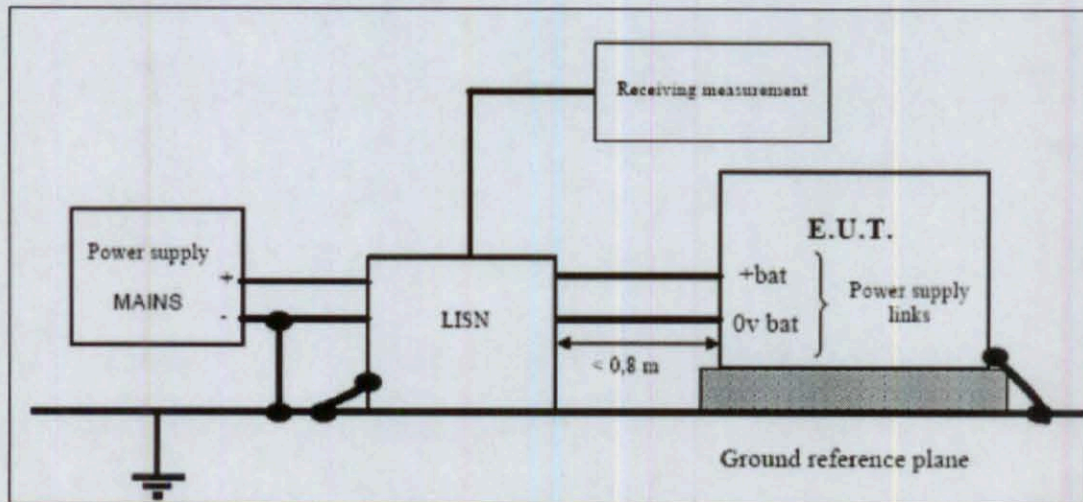

2.3 Test Description

2.3.1 Configuration of Instruments

Test Equipments Used

EQP. Description
LISN: Line Impedance Stabilization Network
R&S EMI Receiver

Test Receiver Setting



Detector: Quasi-Peak and Average

Band Width: 9KHz


Frequency Range: 150KHz to 30MHz

Reported Emission:

Power-L

SCAN TABLE: "EN 50155 V fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	1.0 s	9 kHz	NNLK-8121(52)
Average						

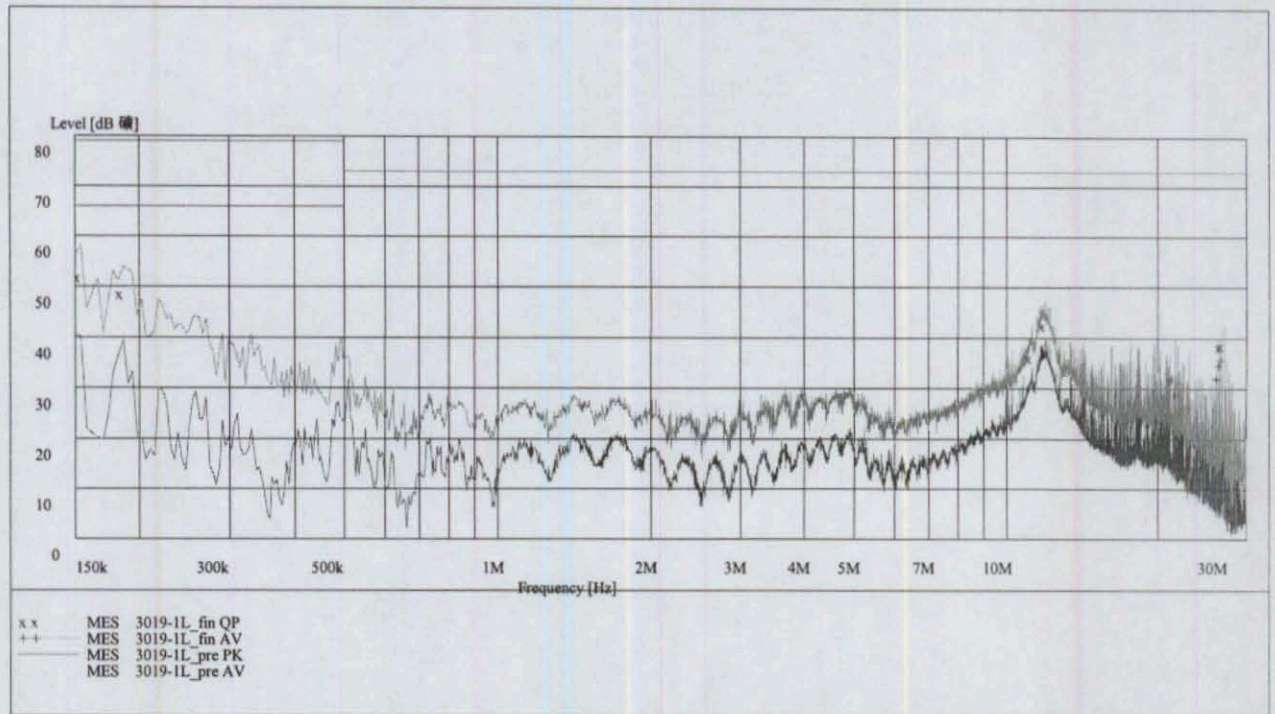

MEASUREMENT RESULT: "3019-1L_fin QP"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.154000	55.10	10.1	79	23.9	L1	GND
0.186000	51.80	10.1	79	27.2	L1	GND
11.222000	39.20	11.1	73	33.8	L1	GND
11.954000	45.60	11.1	73	27.4	L1	GND
26.878000	41.50	11.7	73	31.5	L1	GND
27.186000	41.80	11.7	73	31.2	L1	GND

MEASUREMENT RESULT: "3019-1L_fin AV"


Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
11.954000	39.70	11.1	60	20.3	L1	GND

21.662000	35.10	11.3	60	24.9	L1	GND
21.906000	32.00	11.3	60	28.0	L1	GND
26.566000	35.20	11.6	60	24.8	L1	GND
26.878000	37.80	11.7	60	22.2	L1	GND
27.186000	38.80	11.7	60	21.2	L1	GND

Power-N

SCAN TABLE: "EN 50155 V fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.0 kHz	QuasiPeak	1.0 s	9 kHz	NNLK-8121(52)
Average						

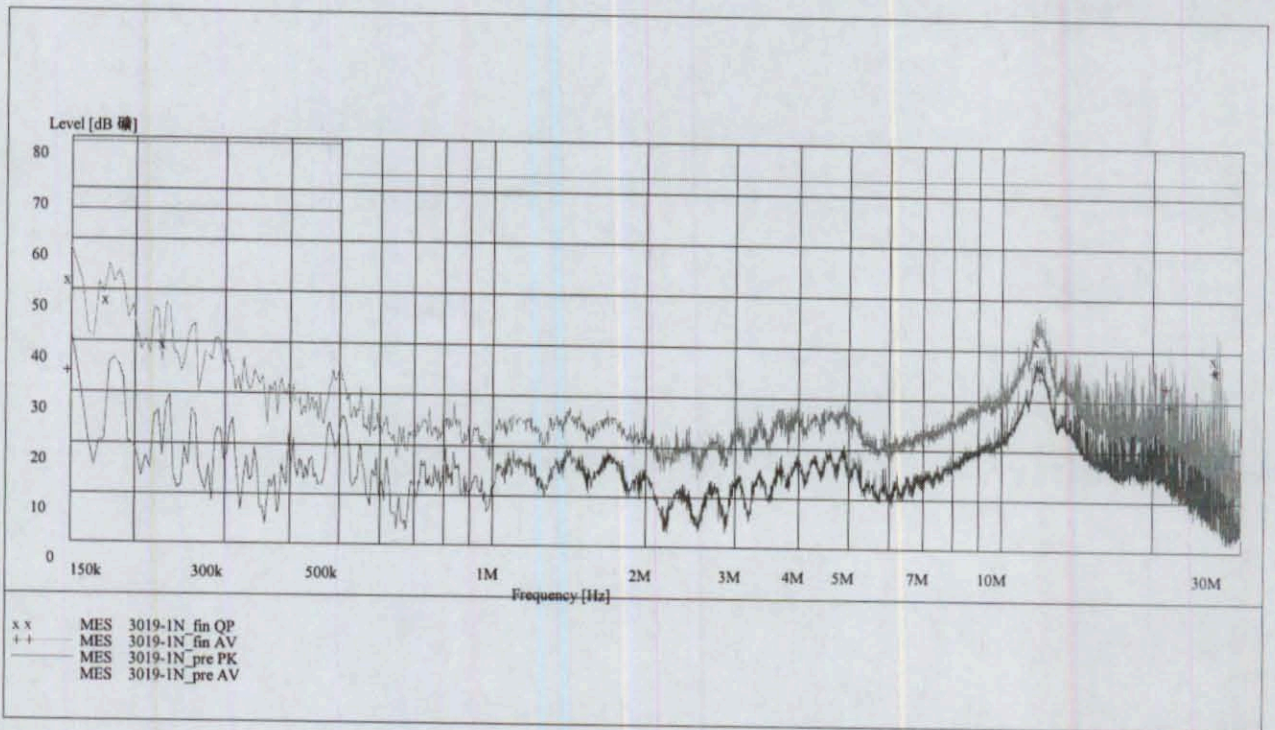

MEASUREMENT RESULT: "3019-1N_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dB μ V		dB	dB μ V	dB	
0.150000	55.30	10.1	79	23.7	N	GND
0.178000	51.50	10.1	79	27.5	N	GND
0.230000	42.80	10.1	79	36.2	N	GND
11.894000	45.30	11.1	73	27.7	N	GND
26.878000	42.00	11.7	73	31.0	N	GND
27.190000	39.50	11.7	73	33.5	N	GND

MEASUREMENT RESULT: "3019-1N_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line	PE
0.150000	37.50	10.1	66	28.5	N	GND
12.138000	37.90	11.1	60	22.1	N	GND
21.662000	36.10	11.3	60	23.9	N	GND
21.906000	32.40	11.3	60	27.6	N	GND
26.878000	39.20	11.7	60	20.8	N	GND
27.186000	39.50	11.7	60	20.5	N	GND

The objective of this test is to check the compliance of the equipment to the EN50155 standard. It deals with measuring the conducted disturbance level emitted by power supply conductors, video ports conductors in the frequency band 150 kHz - 30 MHz. Test procedures are defined in the standards EN 50155.

2.3.2 Conducted Emission Limit

Frequency Range (MHz)	Limits (dBuV)
	Quasi-Peak
0.090~0.150	N.A
0.150~0.500	79
0.500~30.000	73

2.3.3 Operating Condition of EUT

EUT is turned on during the test, and the maximum emanating results are recorded.

2.3.4 Test Configuration and Procedure

EUT is placed on a nonmetal table which is 0.8 meter above the grounded reference plane. Connect the lines under testing of the EUT to the LISN which is connected to receiver by coaxial line, then disturbance signals from the lines can be detected by the receiver.

2.4 Test Result


Pass: The overall emission level do not exceed the limits as stated in section 2.3.2

3. Radiated Emission Test

3.1 Test Standards

EN 50155 clause 7

3.2 Diagram of Test Setup

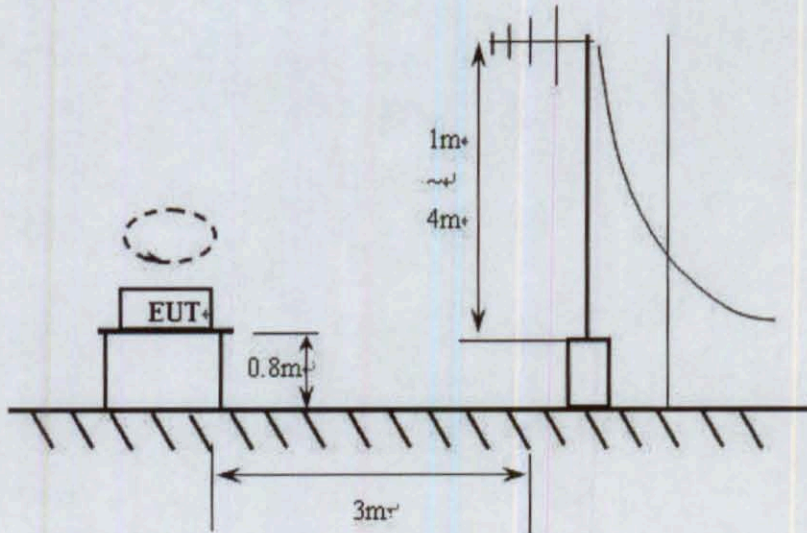


3.3 Test Equipments Used

EQP. Description
All band antenna
R&S EMI Receiver

3.4 Test Description

3.4.1 Configuration of Instruments

Test Receiver Setting

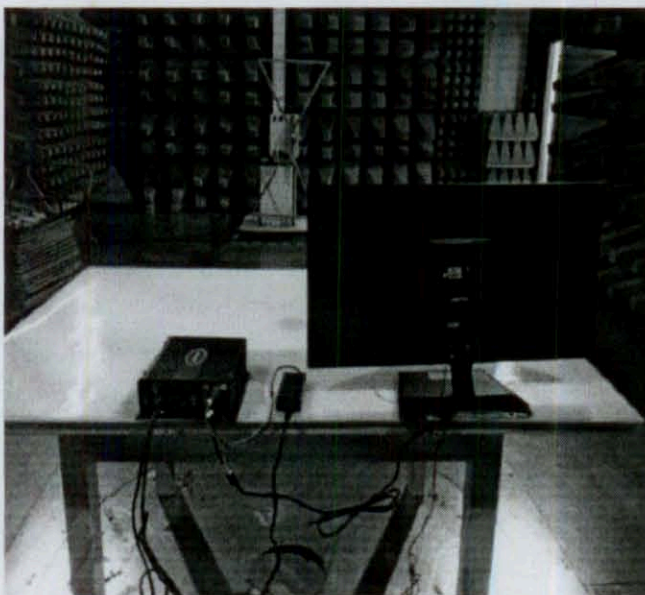

—Detector: Quasi-Peak

- Band Width: 120KHz
- Frequency Range: 30MHz to 1000MHz
- Turntable Rotated: 0 to 360 degrees


Antenna Position:

- Height: 1m to 4m
- Polarity: Horizontal and Vertical

Reported Emission:

SCAN TABLE: "EN 50155 Field fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	CBL 6112B-3

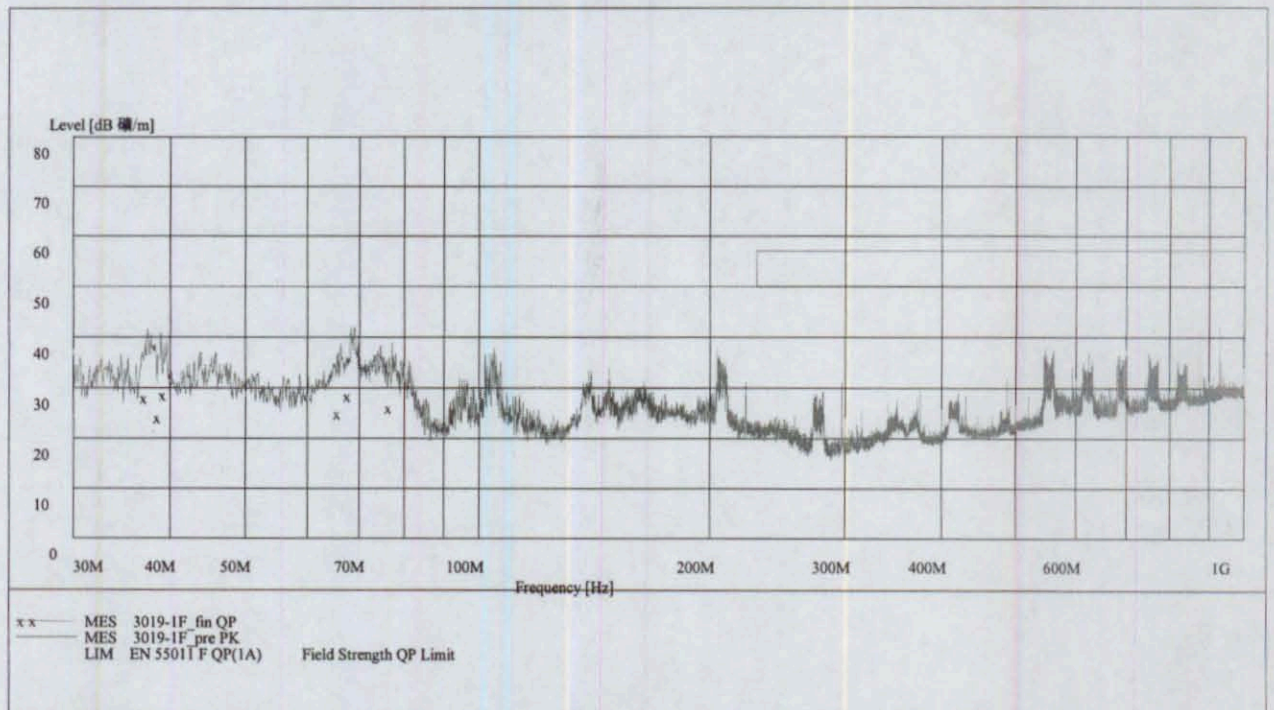

MEASUREMENT RESULT: "3019-1F_fin QP"

Frequency MHz	Level dBμV/m	Transd dB	Limit dB	Margin dBμV/m	Height dB	Azimuth cm	Polarisation deg
37.380000	31.20	15.9	50.0	18.8	100.0	45.00	VERTICAL
38.880000	27.30	15.0	50.0	22.7	100.0	45.00	VERTICAL
39.540000	31.80	14.6	50.0	18.2	109.0	45.00	VERTICAL
66.240000	28.10	8.4	50.0	21.9	273.0	45.00	VERTICAL
68.340000	31.60	8.4	50.0	18.4	150.0	0.00	VERTICAL
77.160000	29.20	9.2	50.0	20.8	152.0	34.00	VERTICAL

— Maximum emission configuration was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

3.4.2 Radiated Emission Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m) Quasi-Peak
30 ~ 230	3	50
230 ~ 1000	3	57

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

3.4.3 Operating Condition of EUT

The operation mode of EUT is same as Section 2.4.3, except the test setup.

3.4.4 Test Configuration and Procedure

EUT is tested in Semi-Anechoic Chamber. EUT is placed on a nonmetal table which is 0.8 meter above a grounded turntable. The turntable can rotate 360 degrees to determine the azimuth of the maximum emission level. EUT is set 3 meters away from the center of receiving antenna, and the antenna can move up and down from 1 to 4 meter to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set on the test

3.5 Test Result

Pass: The overall emission level do not exceed the limits as stated in section 3.4.2.

4. Electrostatic Discharge Test

4.1 Test Standards

IEC 61000-4-2


4.2 Severity Levels and Performance Criterion

4.2.1 Severity level: Contact Discharge at $\pm 6\text{KV}$ Air Discharge at $\pm 8\text{KV}$

Level	Test Voltage	Test Voltage
	Contact Discharge (KV)	Air Discharge (KV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special

4.2.2 Performance criterion: A

4.3 Diagram of Test Setup

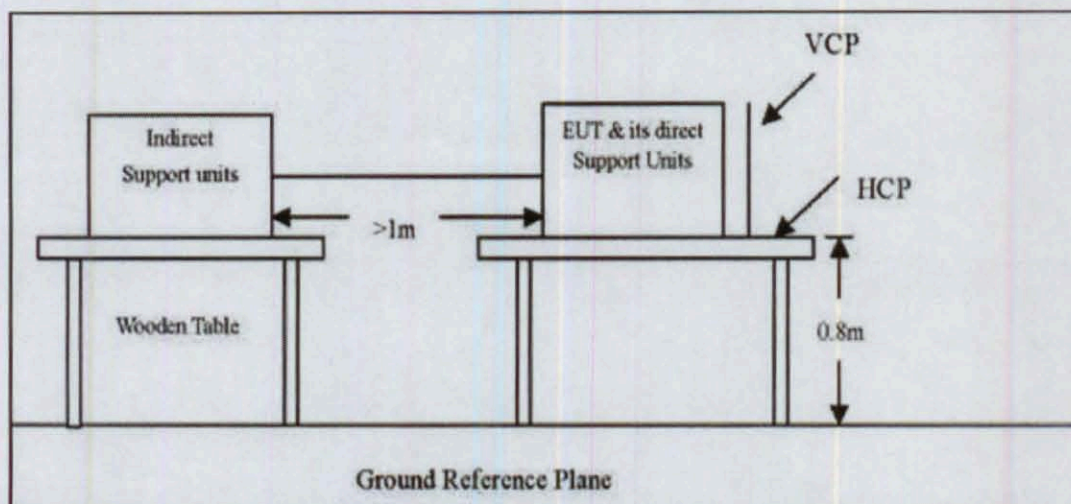

(The 470k Ω resistors are installed per standard requirement.)

4.4 Test Equipments Used

EQP. Description
ESD Simulator

4.5 Test Description

4.5.1 Operating Condition of EUT:

The EUT is turned on during the test, and the maximum susceptible results are recorded. The data connections of the EUT and the external monitor PC is established, the health status should be received from the EUT through out the testing.

4.5.2 Test Configuration and Procedure:

Air Discharge:

— This test is done on a non-conductive surfaces. The round discharge tip of the Electrostatic Discharge simulator shall be approached as fast as possible then to touch the EUT. After each discharge, the simulator shall be removed from the EUT. The simulator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

Contact Discharge:

— All the procedure shall be same as air discharge, except using the acute discharge tip. The top end of the Electrostatic Discharge simulator is touch the EUT all the time when the simulator is re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.

Pass and Fail Criteria: Refer to the justification criteria in section 1.5

4.6 Test Setting



4.7 Test Result

Pass: The functions of EUT under test accord with Requirements refer to 1.5.3

5. RF Field Strength Susceptibility Test

5.1 Test Standards

IEC 61000-4-3

5.2 Severity Levels and Performance Criterion

5.2.1 Severity level:


80 MHz to 1000MHz 20V/m

1.4GHz to 2.1GHz 10V/m

2.1GHz to 2.7GHz 5V/m

Modulation : 80% AM (1kHz) for all ranges

5.3 Diagram of Test Setup

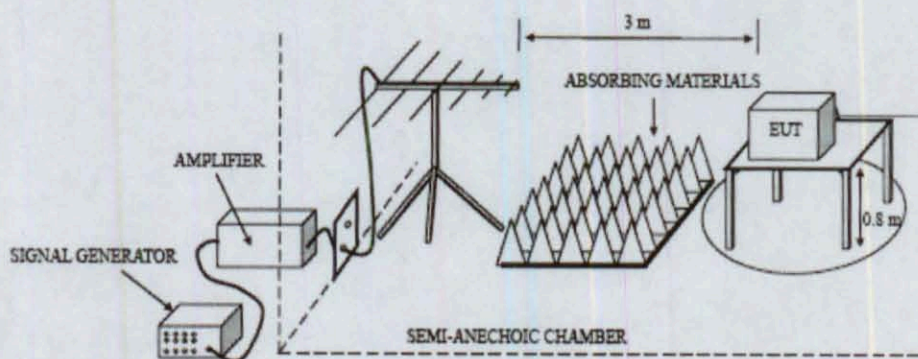

5.4 Test Equipment Used

Equipment Description
Signal Generator
AR/Power Amplifier
AR/Power Amplifier
AR/Field Probes

5.5 Test Description

5.5.1 Operating Condition of EUT

The operation mode of EUT is same as Section 4.5.1., except the test setup.

5.5.2 Configuration of Instruments

80 MHz to 1000MHz 20V/m

1.4GHz to 2.1GHz 10V/m

2.1GHz to 2.7GHz 5V/m

Modulation: 80% AM (1kHz) for all ranges

Step Size: 1% of the start and thereafter 1% of the preceding frequency value.

Dwell Time: 2Sec.

5.5.3 Test Configuration and Procedure

1. The EUT and support units were located at the edge of supporting table keep 3 meter away from transmitting antenna, it just the calibrated square area of field uniformity. And the EUT via DVR previewed on monitor which out of the chamber.

2. Adjusting the cables to be exposed to the electromagnetic field as possible.

3. Performing a Radiated Emission Scan in range of 80 to 1000MHz, 1.4GHz to 2.1GHz, 2.1GHz to 2.7GHz prior to do RS test and records the more higher emission frequencies for the reference of RS test, due to antenna effectiveness.

4. Setting the testing parameters of RS test software per IEC 61000-4-3.


5. Referring to the tested data of step 3 to performing the RS test.

6. Check the functions of EUT refer to 1.5.3

7. Changing the EUT to the other side and repeat step 3 to 6, until 4 sides of EUT were verified.

Refer to the justification criteria in section 1.6.1

5.6 Test Setting

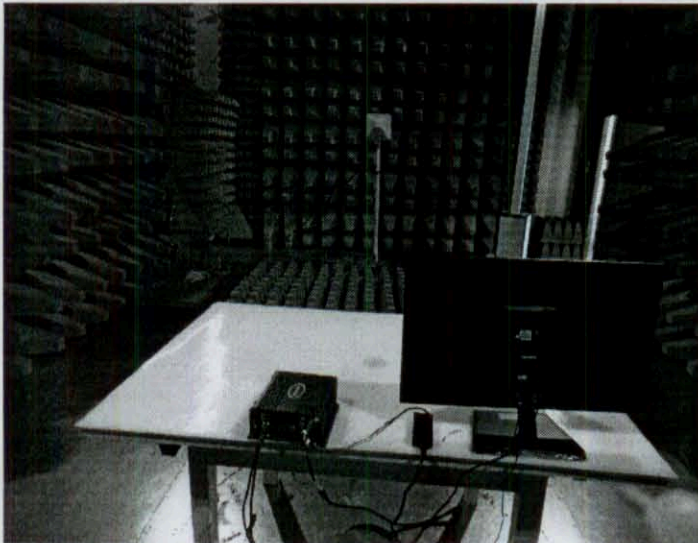

5.7 Test Result

Pass: The functions of EUT under test accord with Requirements refer to 1.5.3

6. Electrical Fast Transient/Burst Test

6.1 Test Standards


IEC 61000-4-4 clause 8

6.2 Severity Levels and Performance Criterion

6.2.1 Severity level: ± 2 kV 5/50 ns Tr/Th with 5 kHz repetition frequency, burst duration 15ms, burst period 300ms

Open Circuit Output Test Voltage $\pm 10\%$		
Level	For Power Supply Lines	
	V peak(KV)	Repetition Frequency(KHz)
1	0.5	5
2	1	5
3	2	5
4	4	2.5
x	Special	Special

6.3 Diagram of Test Setup

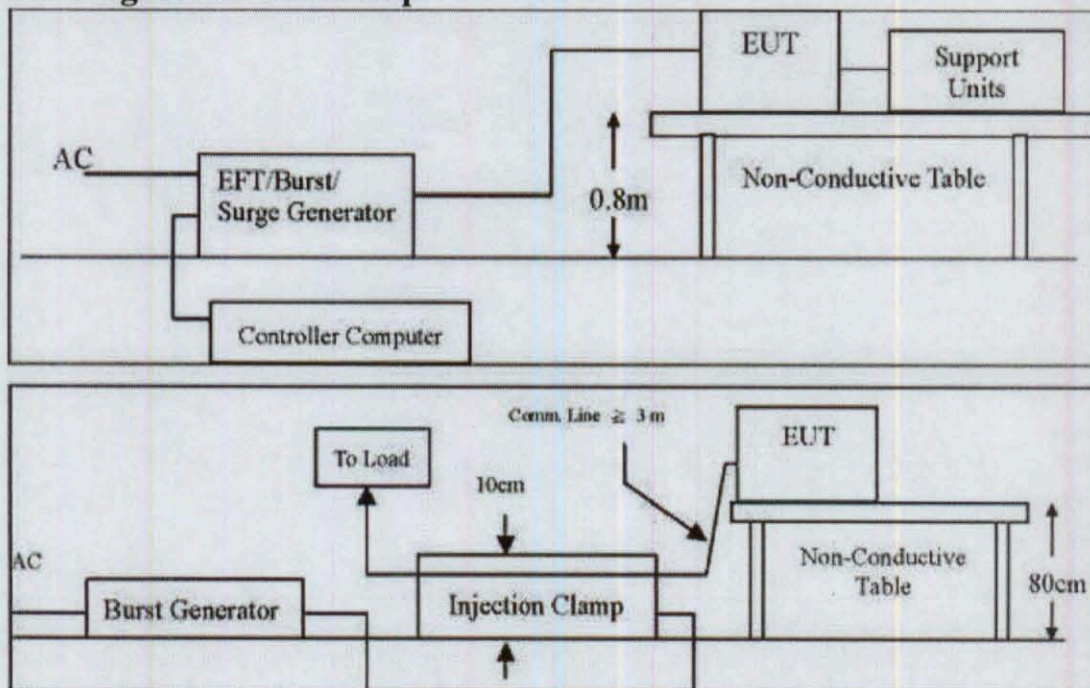

Ports for testing

Port under testing
Video & Audio output, LAN
DC input

6.4 Test Equipment Used

EQP. Description

Fast Transients /Burst Generator

6.5 Test Description

6.5.1 Operating Condition of EUT:

The operation mode of EUT is same as Section 4.5.1., except the test setup.

6.5.2 Test Requirements

EUT and its simulators shall be placed 0.8m high above the ground reference plane which is a minimum 1m*1m with minimum 0.65mm thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.


6.5.3 Test Configuration and Procedure

EUT is connected to coupling/decoupling network which couples the EFT signal to power input and video & audio lines. During the test, both polarities of the test voltage should be applied and the duration of the test can't be less than 1mins.

Record any performance degradation of the EUT during the test and judge the test result according to the stated performance criterion:

Test Criterion A is applied together with the following requirements refer to the justification criteria in section 1.5

6.6 Test Setting

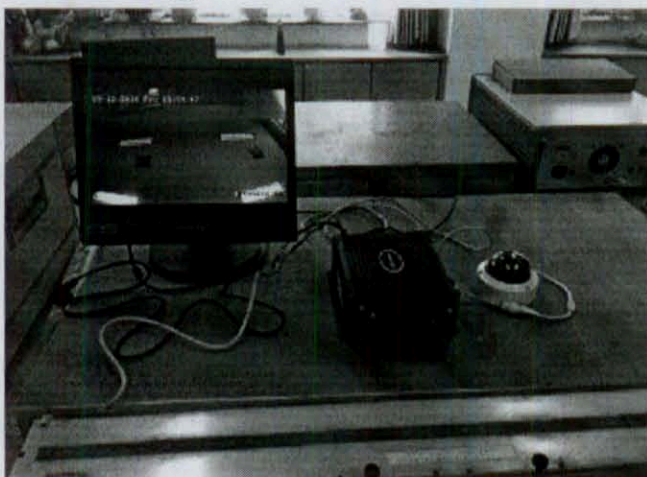

6.7 Test Result

Pass: The functions of EUT under test accord with Requirements refer to 1.5.3

7. Surge Test

7.1 Test Standards

IEC 61000-4-5 Clause 8

7.2 Severity Levels and Performance Criterion


Open circuit test voltage line to ground:

+/- 2KV 42 Ω , 0.5mF

Open circuit test voltage line to line:

+/-1KV 42 Ω , 0.5mF

7.3 Diagram of Test Setup

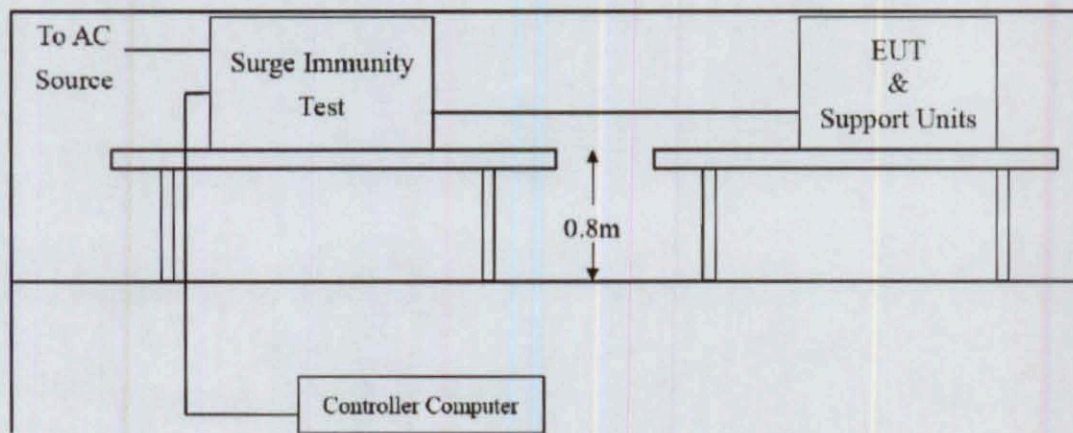

7.4 Test Equipment Used

EQP. Description
SURGE SIMULATOR
CDN

7.5 Test Description

7.5.1 Operating Condition of EUT:

The operation mode of EUT is same as Section 4.5.1., except the test setup.

7.5.2 Test Configuration and Procedure

Test Port: DC Power Port

Basic Standard: IEC/EN 61000-4-5

Requirements: ± 2 kV(Line to Ground))

± 1 kV(Line to Line)

Performance Criteria: B.

Tested by : Wei Liu

Temperature : 30C°

Relative Humidity: 43%

Pressure: 1010mbar

Test Procedure

1. The EUT and support units were located on a wooden table 0.8 m away from ground floor.
2. Injected test voltage to the EUT ports from minimum to standard request or client request.
3. Recorded the test result as shown in following table.

C-6-6 Performance and Result

Voltage Waveform: 5/50 us

Current Waveform: 8/20 us

Polarity: Positive/Negative

At least 5 positive and 5 negative (polarity) surge test

Record any performance degradation of the EUT during the test and judge the test result according to the stated performance criterion:

Test Criterion B is applied together with the following requirements refer to the justification criteria in section 1.5

7.6 Test Setting



7.7 Test Result

Pass: The functions of EUT under test accord with Requirements refer to 1.5.3

8. Conducted Susceptibility Test

8.1 Test Standards

IEC 61000-4-6 Clause 8

8.2 Severity Levels and Performance Criterion

8.2.1 Severity Level: 10 Vrms (carrier voltage)


150 kHz to 80 MHz

1 kHz, 80% AM

Source impedance 150Ω

Injection Methods: CDN for all ports

8.3 Diagram of Test Setup

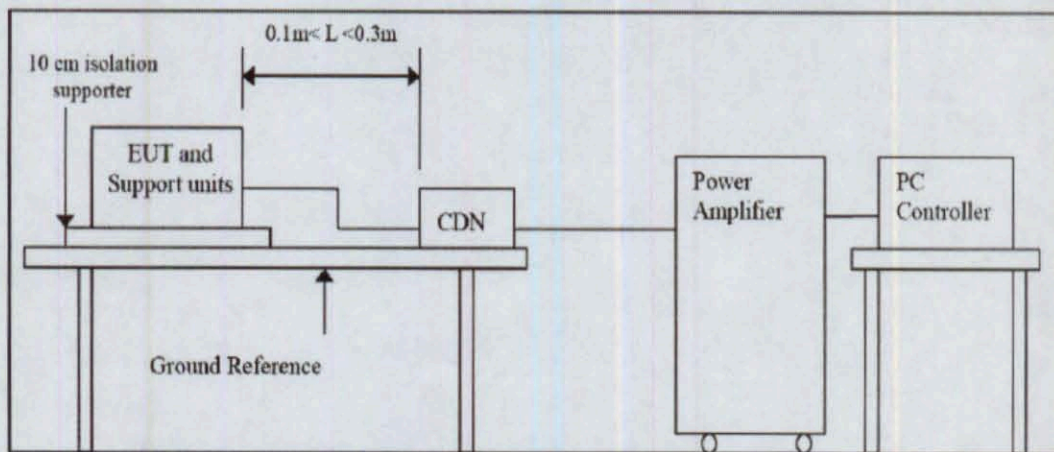

8.4 Test Equipment Used

EQP. Description
SCHAFFNER/RF Generator
CDN

8.5 Test Description

Test Condition

Port: DC Power Port and signal Port

Basic Standard: IEC/EN 61000-4-6

Requirements: 10V, with 80% AM. 1kHz Modulation.

Injection Method: CDN-M2 for DC Power Port

CDN-T4 for signal Port

Performance Criterion: A (Standard Required)

Tested by: Wei Liu

Temperature: 28C°

Humidity: 50%

Pressure: 1010mbar

Frequency Range: 0.15MHz-80MHz

Frequency Step: 1% of fundamental

Dwell Time: 3 sec


1. The EUT and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.

Set the testing parameters of CS test software as per IEC/EN 61000-4-6.

Record any performance degradation of the EUT during the test and judge the test result according to the stated performance criterion.:

Test Criterion A is applied together with the following requirements refer to the justification criteria in section 1.5

8.6 Test Setting

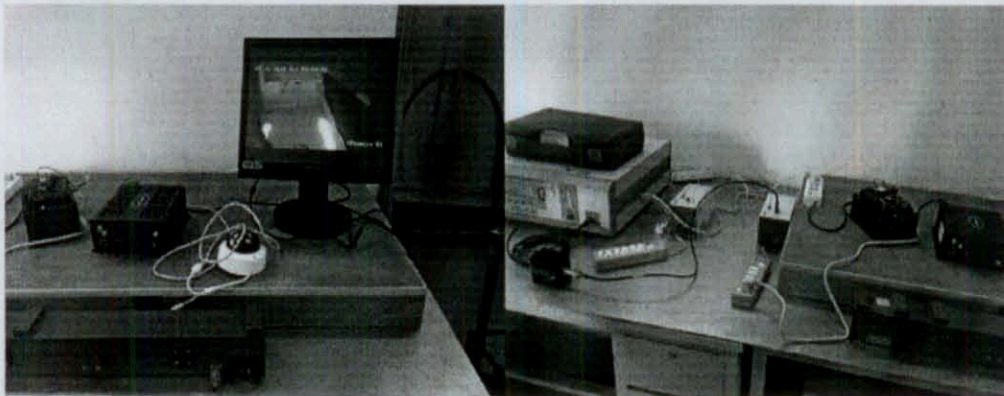

8.7 Test Result

Pass: The functions of EUT under test accord with Requirements refer to 1.5.3

9. Power supply over voltage

9.1 Test Standards


EN 50155 12.2.6

Test requirements:

$1.4U_n$, $d=0.1\text{sec}$, $D=1\text{sec}$, $R_s = 1 \Omega \pm 10\%$

Trapezoidal overvoltage according to EN50155 12.2.6 a)

9.2 Diagram of Test Setup

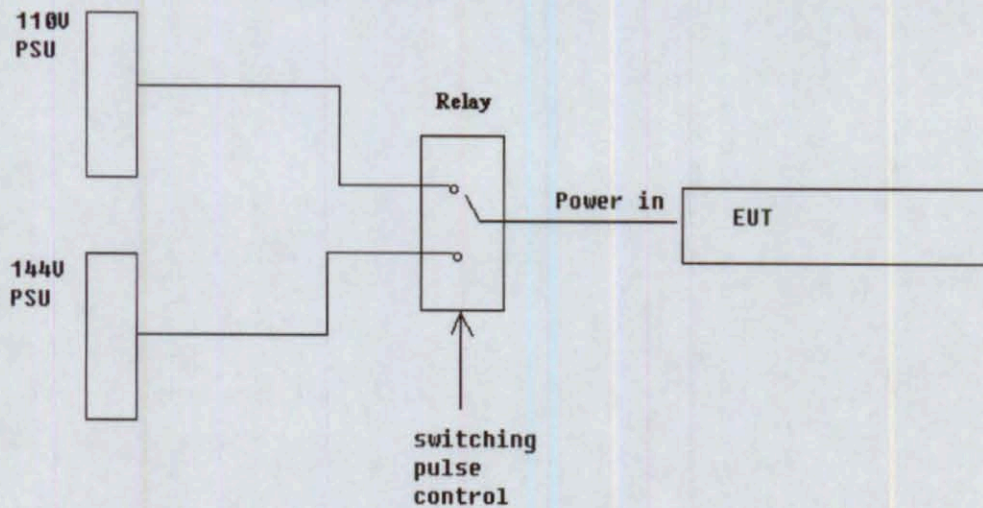

9.3 Test Configuration and Procedure

The EUT is tested with over voltage with the pulse generated by alternating switching between U_n and $1.4 U_n$ with a pulse controlled relay. Test acceptance requirements:

- No failure shall occur
- No degradation of functions has occurred.

9.4 Test Setting



9.5 Test Result

Pass: No failure occurs and no degradation of functions has occurred.

10. Vibration Test

Base Standard : EN50155 clause 12.2.11

Test Standard : EN 61373

Equipment used in testing : Vibration Table


Random Vibration Test Parameters – 1 (Functional test)

Direction	Frequency (Hz)	ASD level (m/s^2) ² /Hz	RMS value m/s^2
Vertical	5-10	+9dB/octave	5.4
	10-100	0.190	
	100-250	-6 dB/octave	
Transverse	5-10	+9dB/octave	4.7
	10-100	0.144	
	100-250	-6 dB/octave	
Longitudinal	5-10	+9dB/octave	2.5
	10-100	0.0414	
	100-250	-6 dB/octave	
Test Time: 30 mins (Each axis)			

Random Vibration Test Parameters – 2 (Long life test)

Direction	Frequency (Hz)	ASD level (m/s^2) ² /Hz	RMS value m/s^2
Vertical	5-10	+9dB/octave	42.5
	10-100	11.83	
	100-250	-6 dB/octave	
Transverse	5-10	+9dB/octave	37
	10-100	8.96	
	100-250	-6 dB/octave	
Longitudinal	5-10	+9dB/octave	20
	10-100	2.62	
	100-250	-6 dB/octave	
Test Time: 5 hrs (Each axis)			

Definition of vibration axis

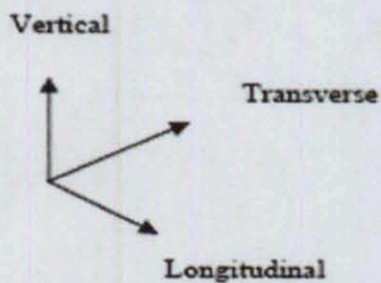

10.1 Test Procedure

1. The EUT is securely mounted on the vibration tables with the orientations that coincided with the test axis.

The control accelerometer is located on the fixture for all vibrations tests for monitoring, these data will be send back to the control monitoring software for data logging through out the testing.

2. Start the vibrations test according to Test Parameter -1 and then repeat the test for Test Parameter -2.

10.2 Acceptance Criteria


The functional test requirement is refer to section: 1.5.3

Passing Criteria:

No damage and failure should be found during and after vibration test.

Screws, nuts and other mechanical parts should be securely fixed without loose.

10.3 Test Setting

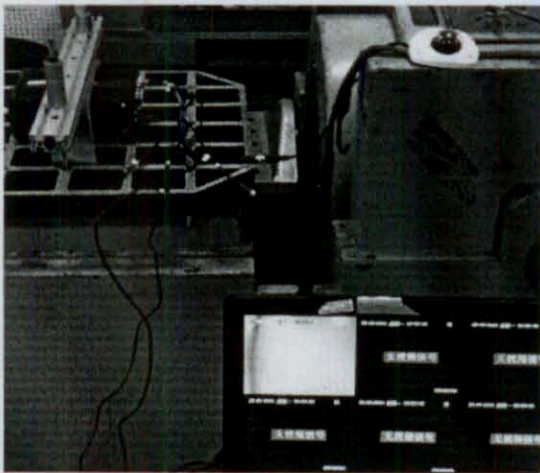

10.4 Test Result

Pass: No damage and failure occurred and the functions of EUT under test accord with Requirements refer to 1.5.3.

11. Shock Test

Base Standard : EN50155 clause 12.2.11

Test Standard : EN 61373

Wave Form : Half sine wave

Acceleration : 300m/s²

Duration Time : 18ms

No of shock : 3 times (Each Axis)

Shock direction : \pm Longitudinal, \pm Transverse, \pm Vertical

11.1 Test Procedure:

1. The EUT is securely mounted on the vibration tables with the orientations that coincided with the test axis.
2. The control accelerometer is located on the fixture for all shock tests for monitoring these data will be send back to the control monitoring software for data logging through out the testing.
3. Start the test and repeat for each axis

11.2 Acceptance Criteria



The functional test requirement is refer to section: 1.5.3

Passing Criteria:

No damage and failure should be found during and after shock test.

Screws, nuts and other mechanical parts should be securely fixed without loose.

11.3 Test Setting

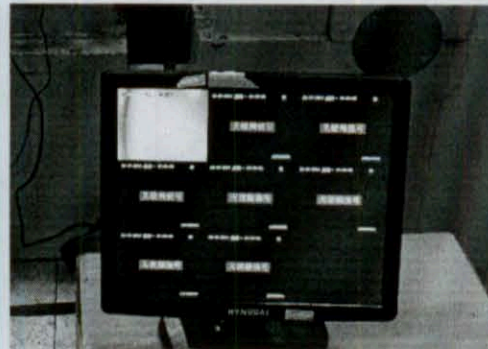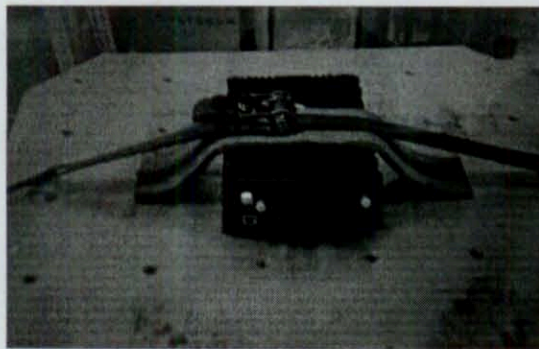

11.4 Test Result

Pass: No damage and failure occurred and the functions of EUT under test accord with Requirements refer to 1.5.3.

12. Dry Heat Test

Base Standard: EN50155 clause 12.2.4

Test Standard: EN 60068-2-2

12.1 Test Procedures

1. Perform function test (Refer to section 1.5.3.)
2. Place sample to chamber at 25°C.
3. Ramp up temperature to 70°C in 45min
4. Maintain temperature at 70°C for 8 hours
5. Perform function test
6. Ramp down to 25°C in 30min
7. Perform function test (Refer to section 1.5.3.)

12.2 Acceptance Criteria


The functional test requirement is refer to section: 1.5.3

Passing Criteria:

No damage and failure should be found during and after shock test.

Screws, nuts and other mechanical parts should be securely fixed without loose.

12.3 Test Setting

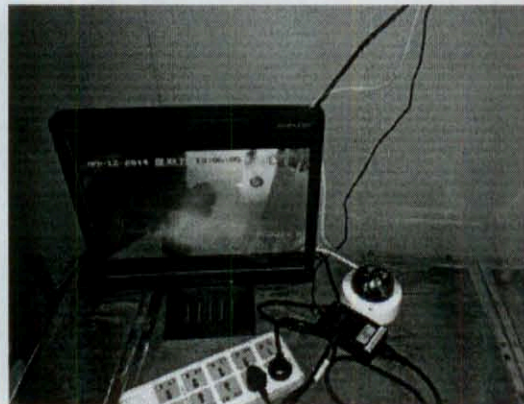

12.3 Test Result

Pass: No damage and failure occurred and the functions of EUT under test accord with Requirements refer to 1.5.3.

13. Cooling Test

Base Standard: EN50155 clause 12.2.3

Test Standard: EN 60068-2-1

13.1 Test Procedures

1. Perform function test (Refer to section 1.5.3.)
2. Place sample to chamber at 25°C.
3. To lower the temperature to -25°C in 50min
4. Maintain temperature at -25°C for 2 hours, then switch the sample on and a performance check is carried out, keeping the equipment at the low temperature for 8 hours.
5. Ramp down to 25°C in 30min
6. Perform function test (Refer to section 1.5.3.)

13.2 Acceptance Criteria

The functional test requirement is refer to section: 1.5.3

Passing Criteria:

No damage and failure should be found during and after shock test.

Screws, nuts and other mechanical parts should be securely fixed without loose.

13.3 Test Setting



13.4 Test Result

Pass: No damage and failure occurred and the functions of EUT under test accord with Requirements refer to 1.5.3.

NOTES

1. Reports with no signet of "test report" or that of the inspect institute are all invalid.
2. Partial copy of this report is forbidden. Entire copy of the report without signet is invalid.
3. Report with no approval are invalid.
4. Altered report is invalid.
5. If any disagreement on this report, a written claim is requested to be submit to the institute within 15days on receipt of the report.
6. Generally, authorized inspection is only responsible for the samples inspected.



Address: 36#, Macheng Road, Hangzhou, China
Tel: +86 571 88366802 +86 571 88828284
Fax: +86 571 88366821
P.O.Box: 1215#, Hangzhou, China
Zip Code: 310012
E-mail: wwx@chinacptc.net
WEB: www.chinacptc.net