

DS-K1T341A Series MinMoe Terminal

Release Notes (2023-10-19)


| | | |
|---|-------------------------|--|
| Device Model: DS-K1T341AM DS-K1T341AMF Naming Rule: M for M1 card, F for fingerprint | Firmware Version | ARM: ACS_641_AI3_EN_STD_V3.7.0_build231019 ACS_641_AI3_EN_NEU_V3.7.0_build231019 MCU: ACS_DS- K1T641_642_13.56M_ST1_GML_GM_V1.0.2_build231019 |
| | Software Version | HikCentral AC: https://www.hikvision.com/en/support/download/software/hikcentral-access-control-v2-1/ |

Reason of Upgrade

Fix bugs, enhance products quality and meet customers' requirements.

New Features

1. Add security issues and secure email (overseas) password retrieval function.

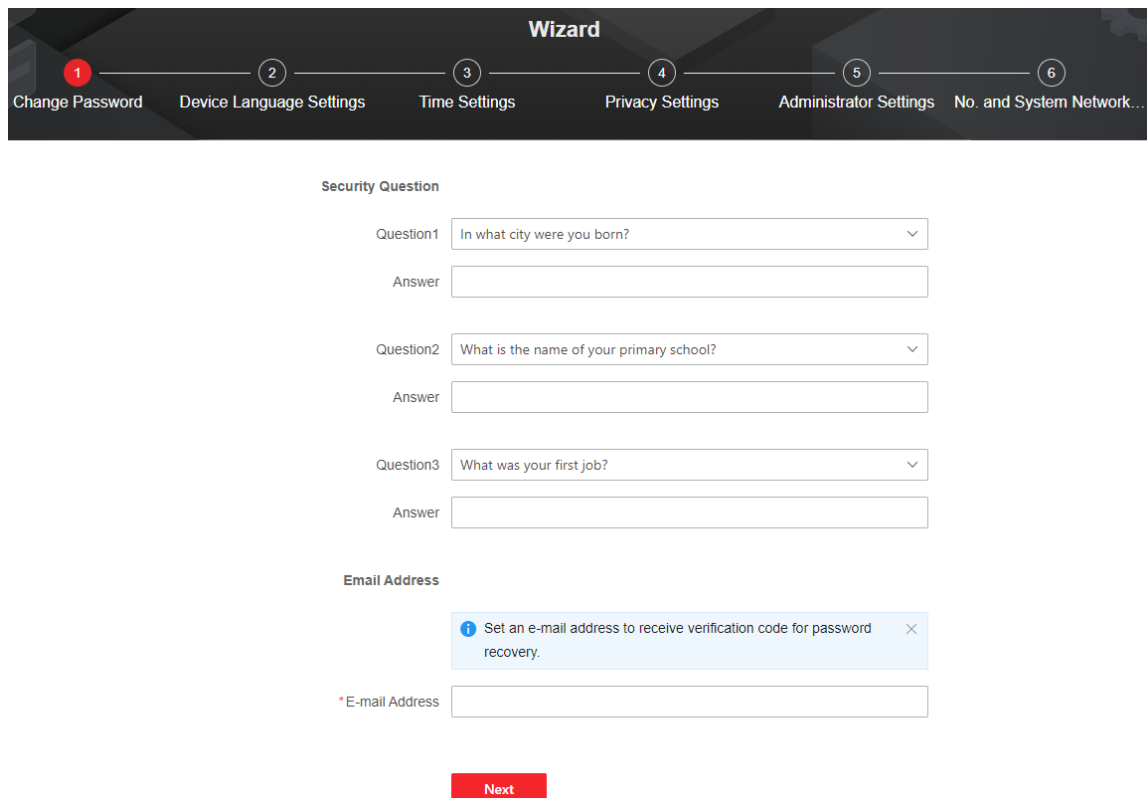

The screenshot shows the 'Wizard' interface for setting up the device. The progress bar at the top indicates six steps: 1. Change Password, 2. Device Language Settings, 3. Time Settings, 4. Privacy Settings, 5. Administrator Settings, and 6. No. and System Network... Step 1 is currently active.

Security Question

Question1: In what city were you born?

Answer:

Question2: What is the name of your primary school?

Answer:


Question3: What was your first job?

Answer:

Email Address


*E-mail Address

2. Add web network packet capture function.

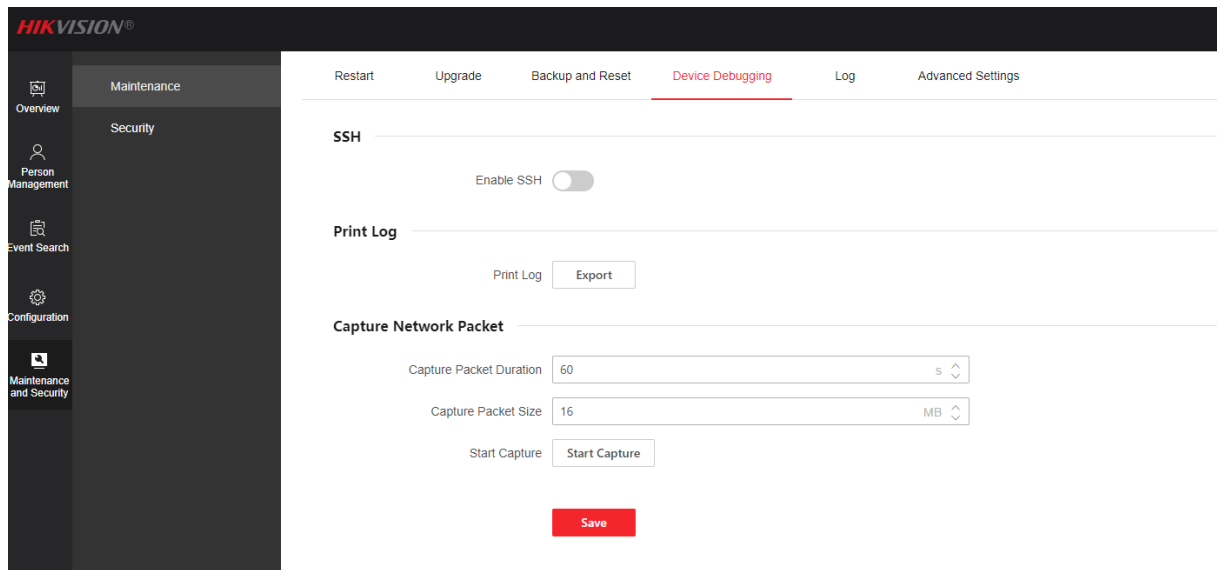


3、Add simple mode to the device display interface.

4、Support UI authentication result desensitization display of employee ID and name. After turning on the function, the displayed content will hide true information.

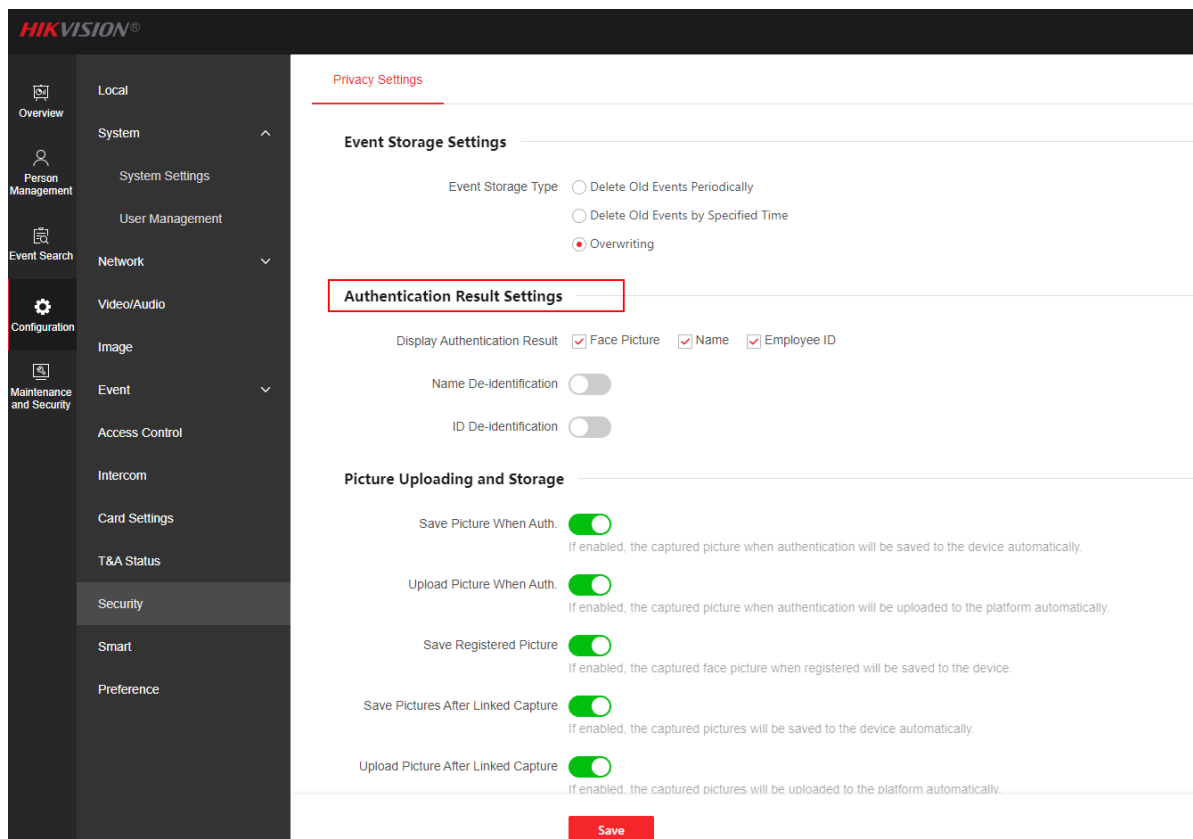


5、Support for custom prompt tones. The Audio format should be wav. Each Audio size should be less than 512KB.

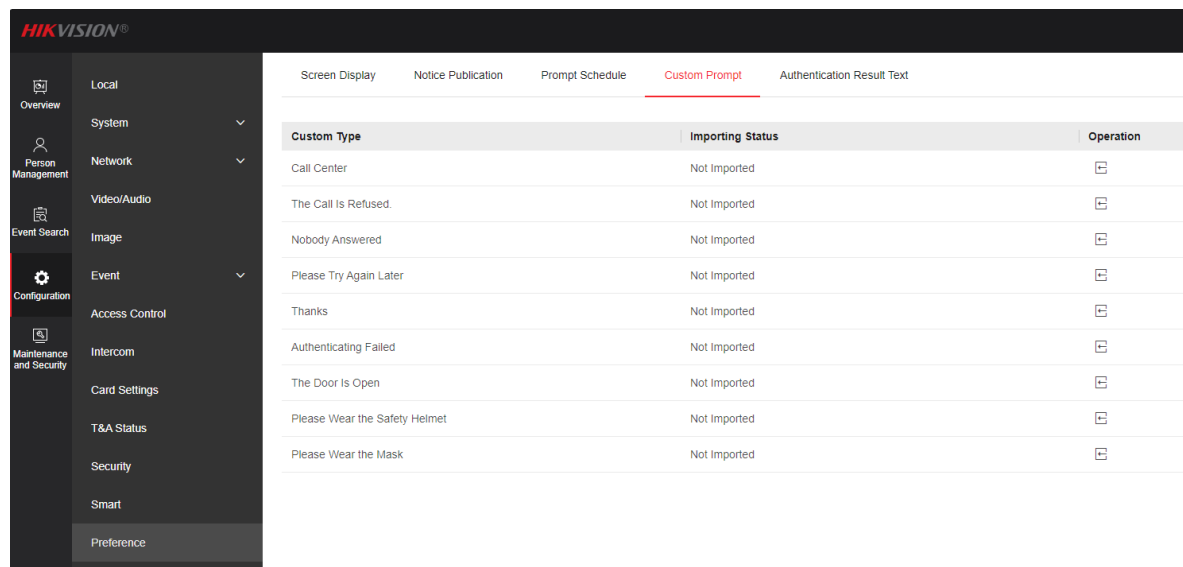

Improved Features

- 1、Improve the display effect of the interface.

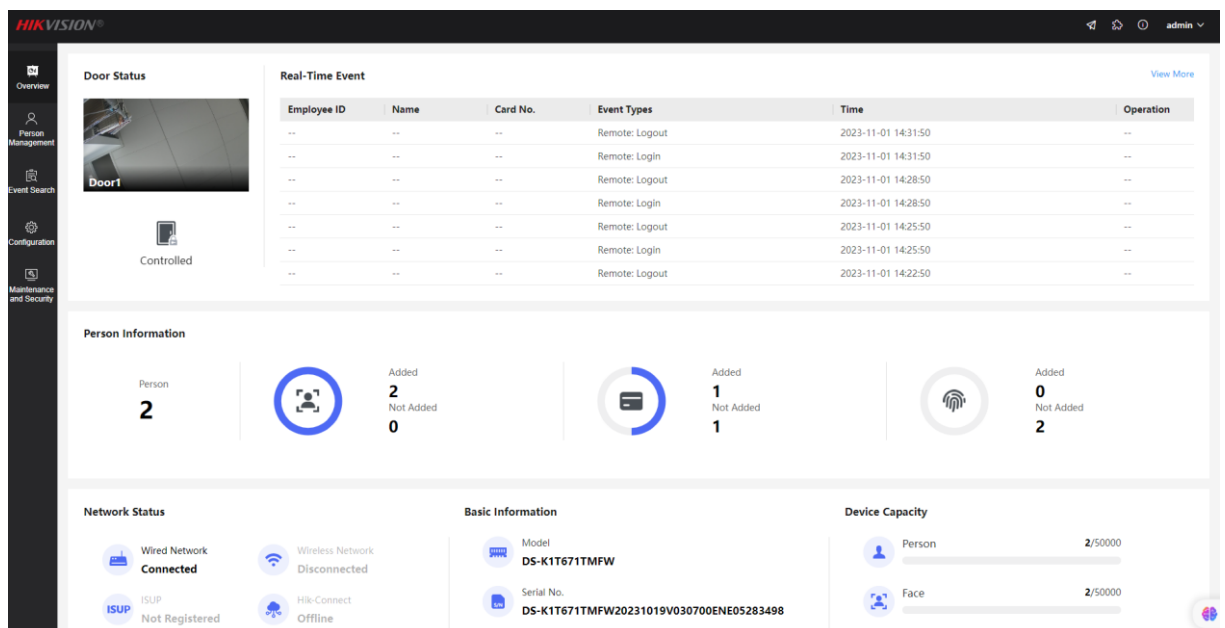

- 2、Add Engineering mode,optimizing Anti-Spoofing Detection algorithms. If a real person easily fails the inspection, the threshold can be lowered. On the contrary, if the dummy recognition is successful, the threshold can be raised.

HIKVISION®

Restart

Upgrade

Backup and Reset

Device Debugging

Log

Advanced Settings

Overview

Maintenance

Security

Person Management

Event Search

Configuration

Maintenance and Security

Face Parameter

Custom Anti-Spoofing Detection ☒

Anti-Spoofing Detection Level General

Anti-Spoofing Detection Threshold

90

Anti-Spoofing Detection Thresh...

88

Lock Face for Anti-Spoofing Pro...

☒

Lock Duration

5

min

Cancel Locking Face for Anti-Spoof...

Unlock

If the device is locked, click the button to unlock.