


How to set privacy mask for analog PTZ camera

Purpose

Set privacy masks for analog PTZ camera.

Steps:

1. Move the cursor to enter the privacy mask configuration submenu:
MAIN MENUS > DOME SETTINGS > PRIVACY MASK

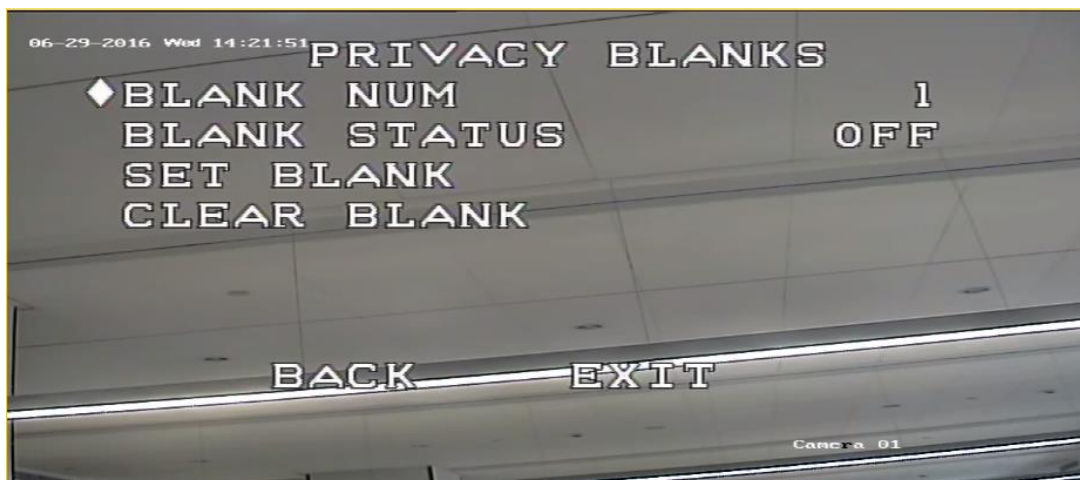

2. Choose the privacy mask number:


Steps:

- (1) Move the cursor to **BLANK NUM** and click IRIS+ to enter the editing mode.
- (2) Click the up and down direction buttons to select a mask number for configuration.
- (3) Click IRIS+ again to confirm and exit the editing mode.


3. Configure the position and size of the privacy mask.

Steps:


- (1) Move the cursor to **SET BLANK** and click IRIS+ button to enter the editing mode as shown in the following figure. You can see a privacy mask on the live window.
- (2) You can see **ADJUST BLANK POS** message on the screen. Click the direction buttons to adjust the position of the privacy mask to the designed scene.

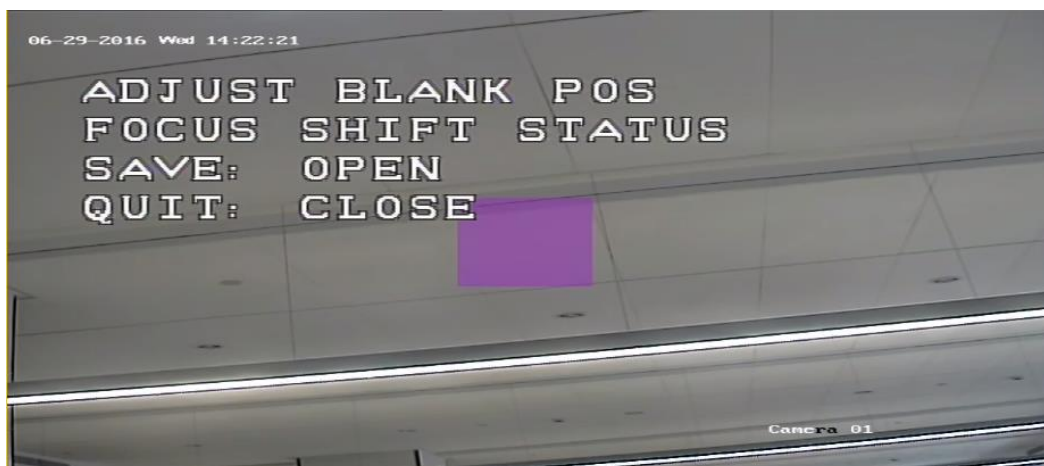

- (3) Click FOCUS+ button, and you can see **ADJUST BLANK SIZE** message on the screen. Click the up/down buttons to increase/decrease the height of the mask and click right/left buttons to increase/decrease the width of the mask. Click IRIS+ button to save the settings and return to the previous menu and you can see the mask turn to gray.

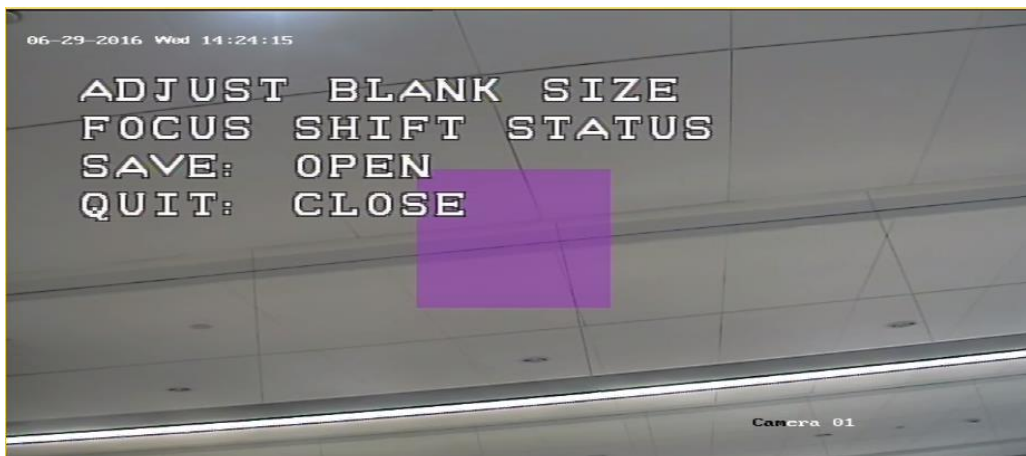

- (4) To modify the configured mask, click IRIS+ button to enter the **SET MASK** menu and click IRIS+ button again to edit.

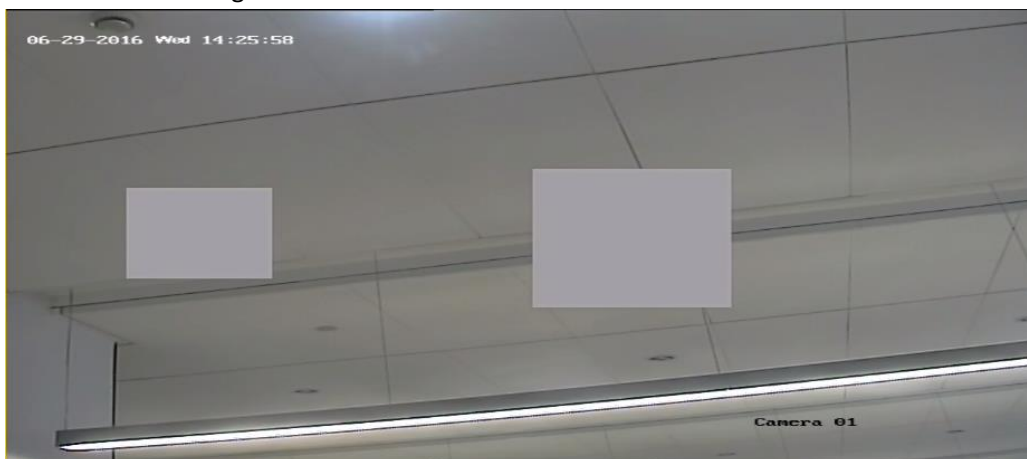

4. Enable or disable the privacy mask function.
Move the cursor to **BLANK STATUS**. Click IRIS+ button to enter the editing mode and click the up and down direction buttons to set it ON or OFF.
NOTE: If no privacy mask has been configured, you cannot set the status as ON.
5. Delete the privacy mask.
You can enter the **CLEAR BLANK** menu to delete the all the configured privacy masks.

First Choice for Security Professionals

HIKVISION Technical Support