

Title:	How to Use Third Party DDNS Services	Version:	v1.0	Date:	12/13/2016
Product:	Cameras, NVR, DVR(文档涉及的相关产品)			Page:	1 of 15


Preparation

1. NVR models and versions:
I series NVR above V4.60
K、Q series NVR above V4.31
2. IPC models and versions:
2 series IPC with -SL
3. Hik-Connect version above V4.15.0

How to upload custom audio for alarm via Hik-Connect

Upload the custom audio to IPC through NVR

- 1) After the NVR is online, add the device to Hik-Connect app through serial number or QR code
- 2) Click  into the device setting page

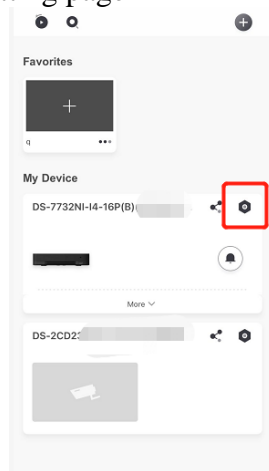



- 3) Click “custom audio”

Title:	How to Use Third Party DDNS Services	Version:	v1.0	Date:	12/13/2016
Product:	Cameras, NVR, DVR(文档涉及的相关产品)			Page:	2 of 15




- 4) Select the channel to upload custom alarm voice (only channels that support uploading will be displayed)

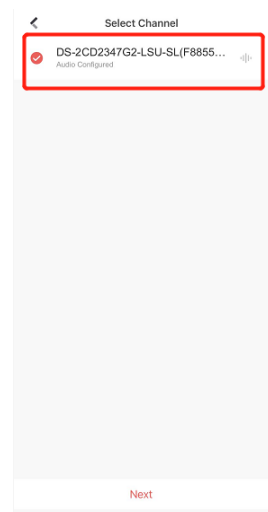


- 5) If there is already a pre-recorded audio file, you can select it on the current page. If you want to record a new audio, click  to start recording. A single audio can last up to 10 seconds. After recording, you can name the audio segment.


Title:	How to Use Third Party DDNS Services	Version:	v1.0	Date:	12/13/2016
Product:	Cameras, NVR, DVR(文档涉及的相关产品)			Page:	3 of 15

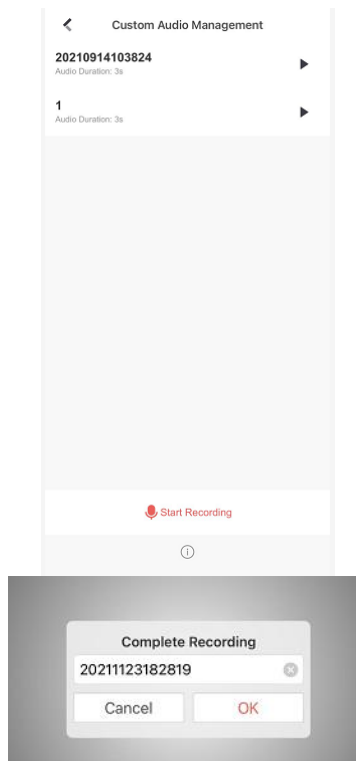



- 6) After selecting the audio, click OK. After the configuration is completed, the app will prompt that tips.

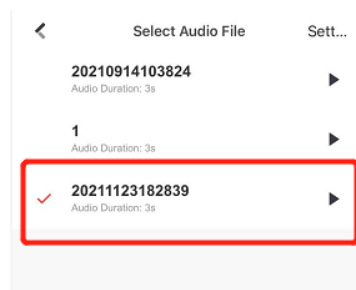

Title:	How to Use Third Party DDNS Services	Version:	v1.0	Date:	12/13/2016
Product:	Cameras, NVR, DVR(文档涉及的相关产品)			Page:	4 of 15

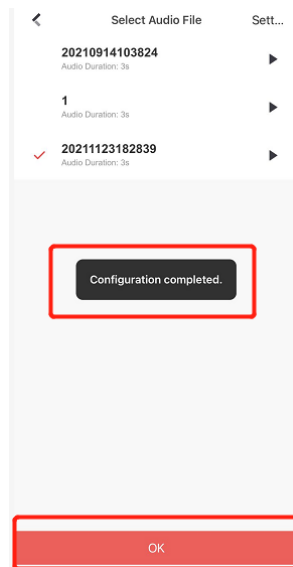

- 7) In addition to testing whether the upload is successful through the alarm, you can also manually trigger the voice by clicking  in the Hik-Connect live view interface, as shown in the figure below:

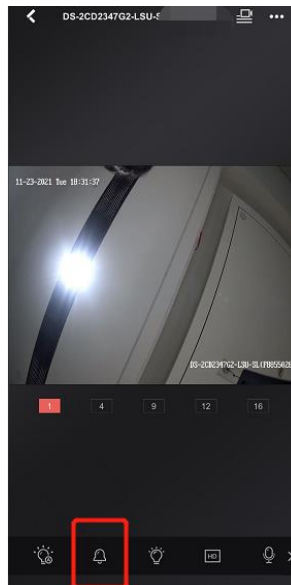



Title:	How to Use Third Party DDNS Services	Version:	v1.0	Date:	12/13/2016
Product:	Cameras, NVR, DVR(文档涉及的相关产品)			Page:	5 of 15

See Far, Go Further
HIKVISION Technical Support