

KH6 Indoor Station V2.2.30_build230821 Release Note


(2023-08-23)

Firmware Basic Information

Firmware	Firmware Version	V2.2.30_build230821
	Basic Information	Device Type
ivms-4200	ivms-4200 Client	V3.9.3.3 (not baseline version, contact technical support for link, baseline iVMS will be available in the end of Q3)

Reason of Upgrade

New model DS-KH6000-E1, DS-KH6100-E1, DS-KH6110-WE1 indoor station first time released.

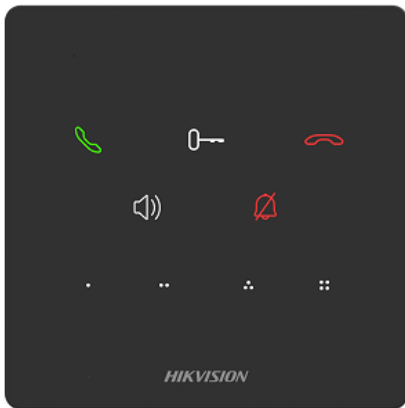

DS-KH6000-E1



DS-KH6100-E1




DS-KH6110-WE1

New Features


DS-KH6000-E1

1. Cost-effective indoor station without screen
2. Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons.

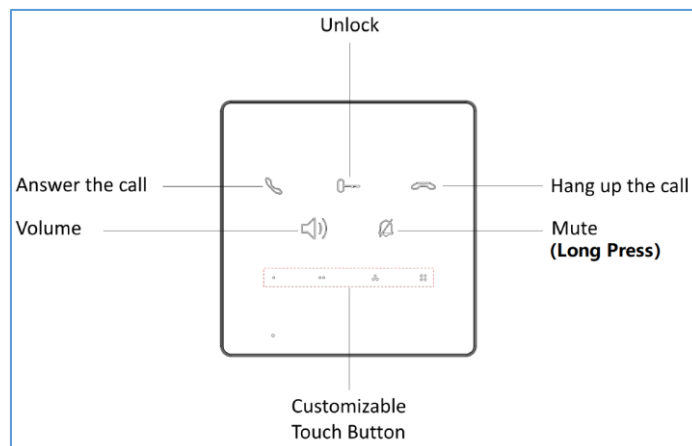

Note:

Setting the custom touch buttons need to use ivms-4200

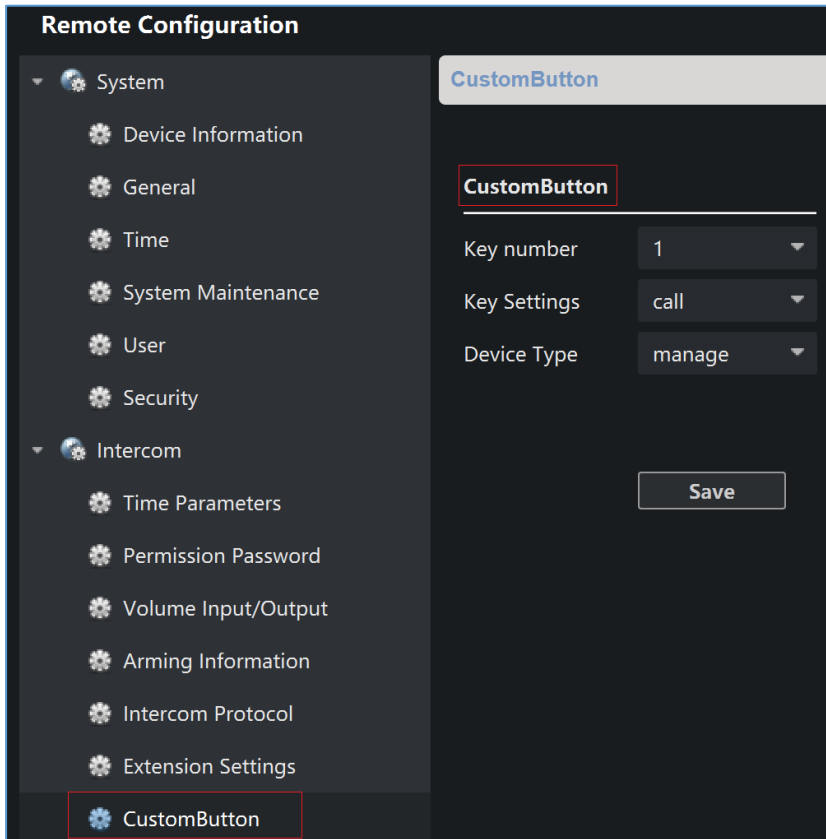

(ivms-4200 3.9.3.3)

You can select from below operation for 4 customize touch buttons:

Button 1: call (management center / indoor station / indoor extension) , call elevator

Button 2: call (management center / indoor station / indoor extension), call elevator, open lock (1 / 2)


Button 3: call (management center / indoor station / indoor extension) , call elevator

Button 4: call (management center / indoor station / indoor extension) , call elevator

- Due to device hardware performance limitation, only 1 main and 8 sub door stations + 1 main and 8 sub doorphones are supported at most.


DS-KH6100-E1

- 4.3-inch colorful non-touch screen with resolution 480 × 272
- Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons

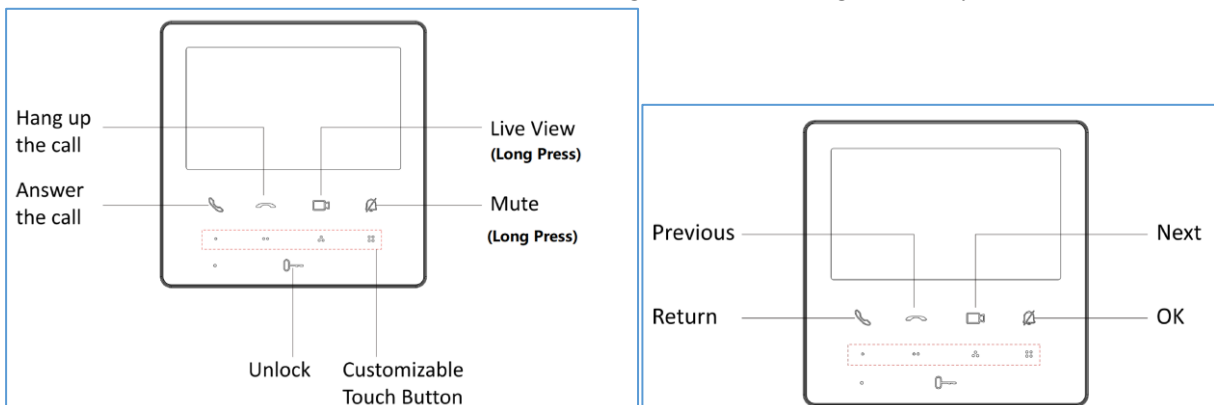

Note:

Setting the custom touch buttons need to use ivms-4200

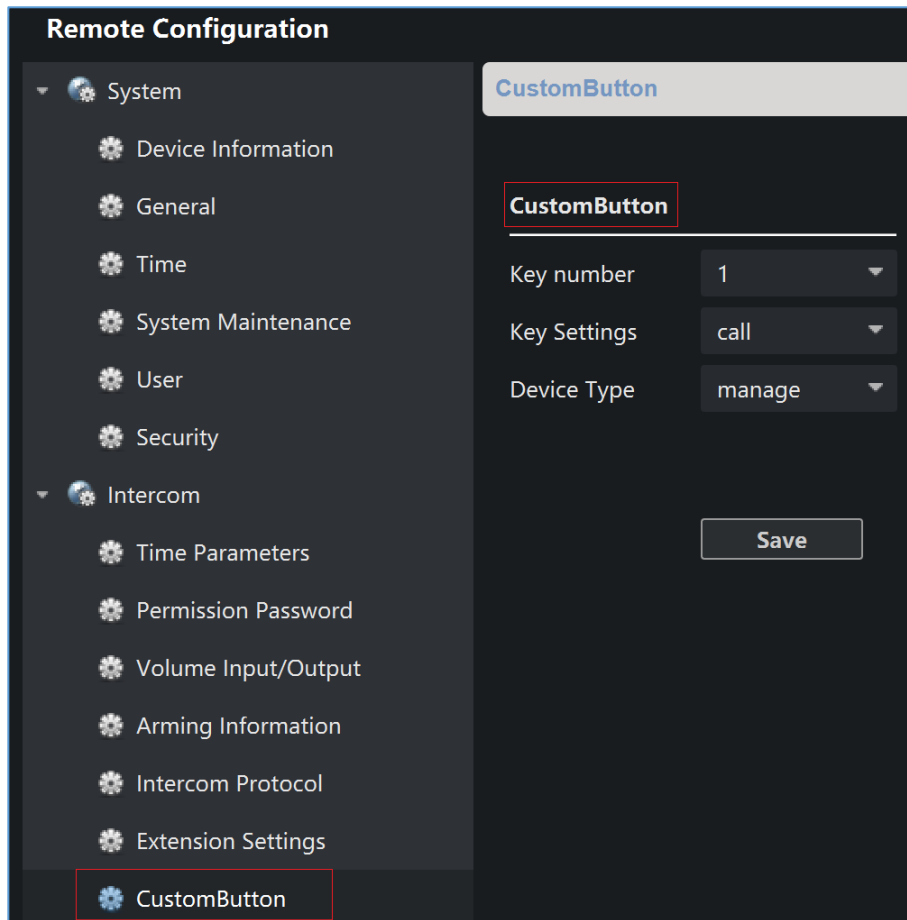

(ivms-4200 3.9.3.3)

Button 1: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator

Button 2: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator, open lock (1 / 2)

Button 3: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator

Button 4: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator


4. Due to device hardware performance limitation, only 1 main and 8 sub door stations + 1 main and 8 sub doorphones are supported at most.

DS-KH6110-WE1


1. Easy and quick set-up: user friendly design
2. 4.3-inch colorful touch screen with resolution of 480 × 272
3. Convenient Hik-Connect APP mobile control
4. Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons

Note:

Setting the custom touch buttons from local configuration interface of indoor station or ivms-4200 software.

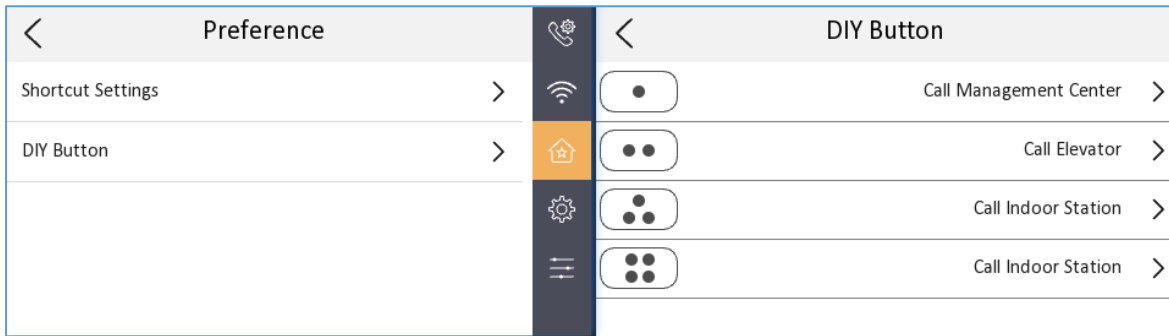

(local configuration interface of indoor station)

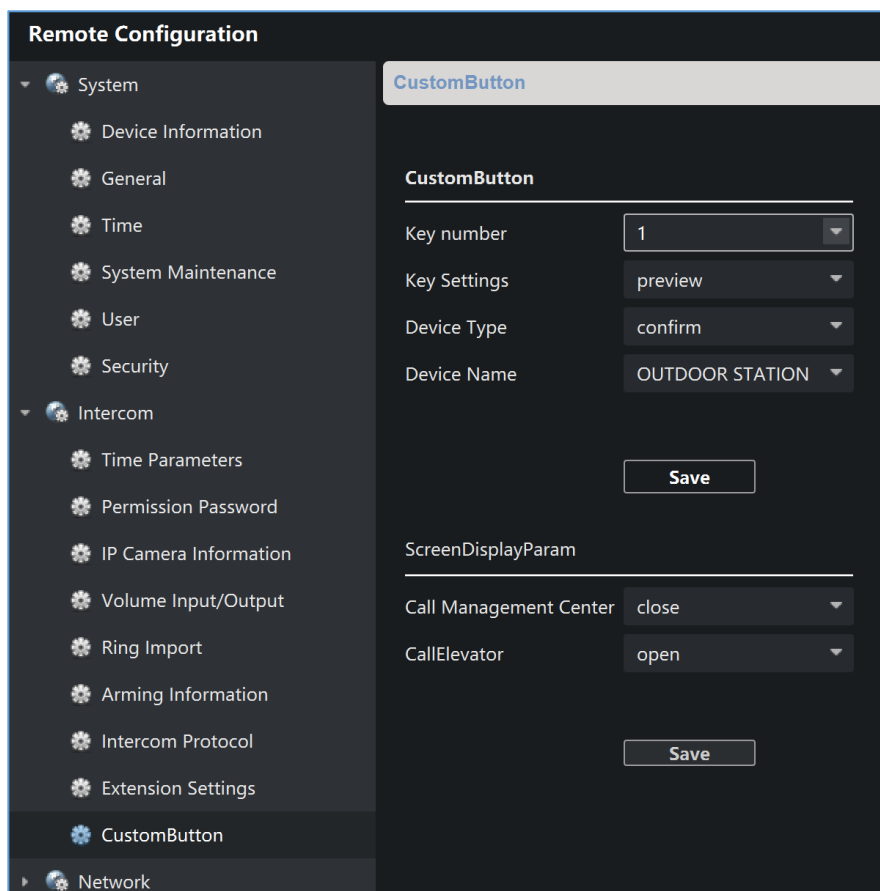

(ivms-4200 3.9.3.3)

Button 1: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator

Button 2: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator, open lock (1 / 2)

Button 3: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator

Button 4: preview (ipc / outdoor / confirm(doorphone)), call (management center / indoor station / indoor extension) , call elevator

Notice

We strongly recommend updating the indoor stations to latest baseline firmware

Customer Impact and Recommended Action

This update refers to function/compatibility improvement and will take effect automatically after the Date of Change. We are very sorry for any inconvenience of use-habit changes caused by this action.

For any questions and request for this firmware, please contact our local technical support team.

Note:

- Hikvision reserves the right to change, alter or withdraw the above notification without prior notice.
- Product design and specifications are subject to change without prior notice.
- The Hikvision firmware may contain errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.
- Hikvision is not liable for any typing or printing errors.

Hikvision Digital Technology CO., Ltd.
No. 555 Qianmo Road, Binjiang District, Hangzhou 310051,
China
Tel: +86-571-8807-5998
FAX: +86-571-8993-5635
Email: overseabusiness@hikvision.com