

6 Series Indoor Stations
Version: V2.1.58_build220815
Release Note
(2022-08-23)

Firmware Basic Information	Firmware Version	V2.1.58_build220815
	Device Type	DS-KH6350-WTE1 DS-KH6320-LE1(B) DS-KH6320-LE1(B)/White DS-KH6320-TE1(B) DS-KH6320-WTE1(B) DS-KH6360-TE1 DS-KH6360-WTE1

Fix some bugs

6 Series Indoor Stations

Version: V2.1.50_build220720

Release Note

(2022-07-20)

Firmware Basic Information	Firmware Version	V2.1.50_build220720
	Device Type	DS-KH6350-WTE1 DS-KH6320-LE1(B) DS-KH6320-LE1(B)/White DS-KH6320-TE1(B) DS-KH6320-WTE1(B) DS-KH6360-TE1 DS-KH6360-WTE1

New


1. Support configure the Static IP of Wi-Fi (enable device configure DHCP, IP address, Subnet mask, gateway, DNS1, DNS2).



2. Indoor station supports configuring time and time zone information for the door station.




3. Support C-S registration mode of indoor station, and master station.
4. Two new Standard language(Portuguese,Slovak) have been added.

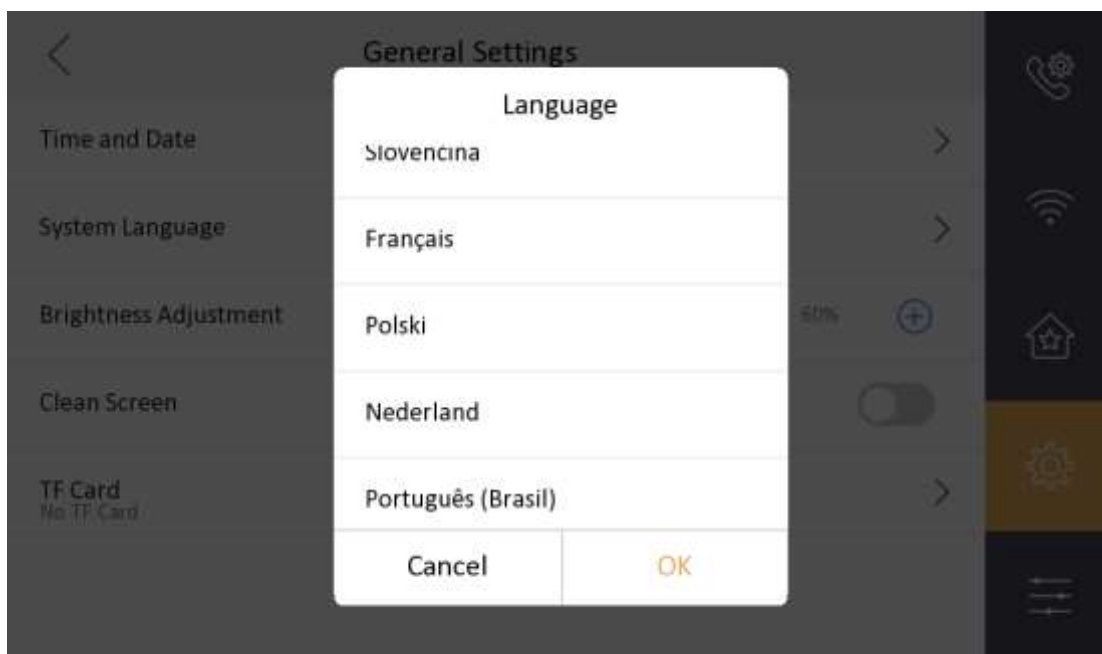


Fix


1. Fix the indoor station maintenance interface. When click restore or restore all, a prompt information will pop.

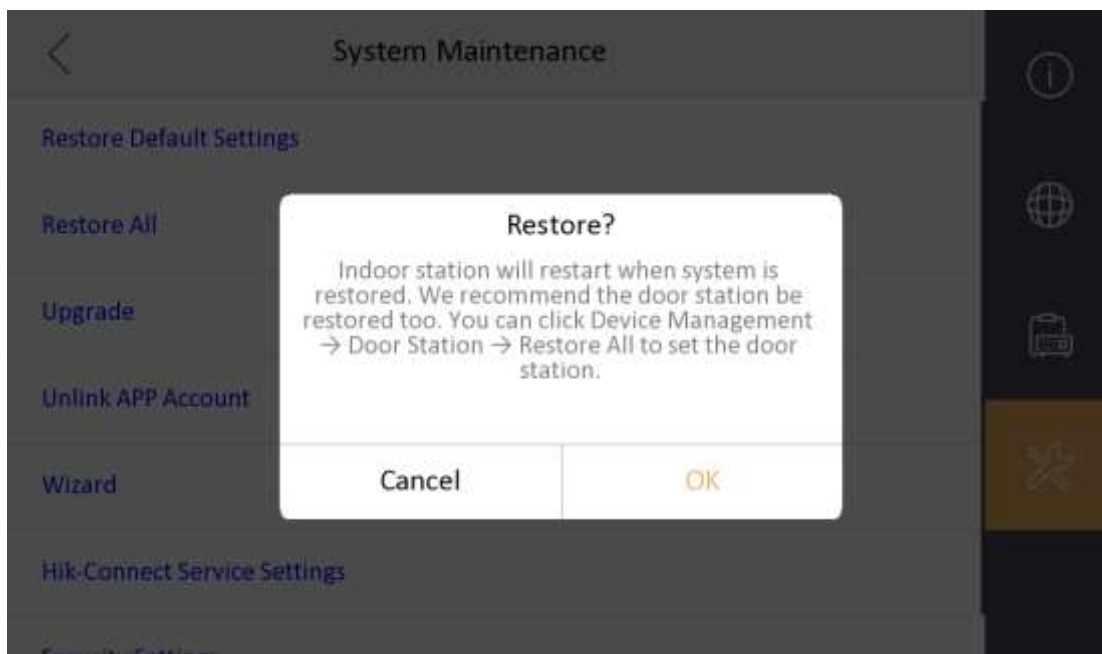


2. The indoor station wizard-related devices added the effect of selecting the door station.

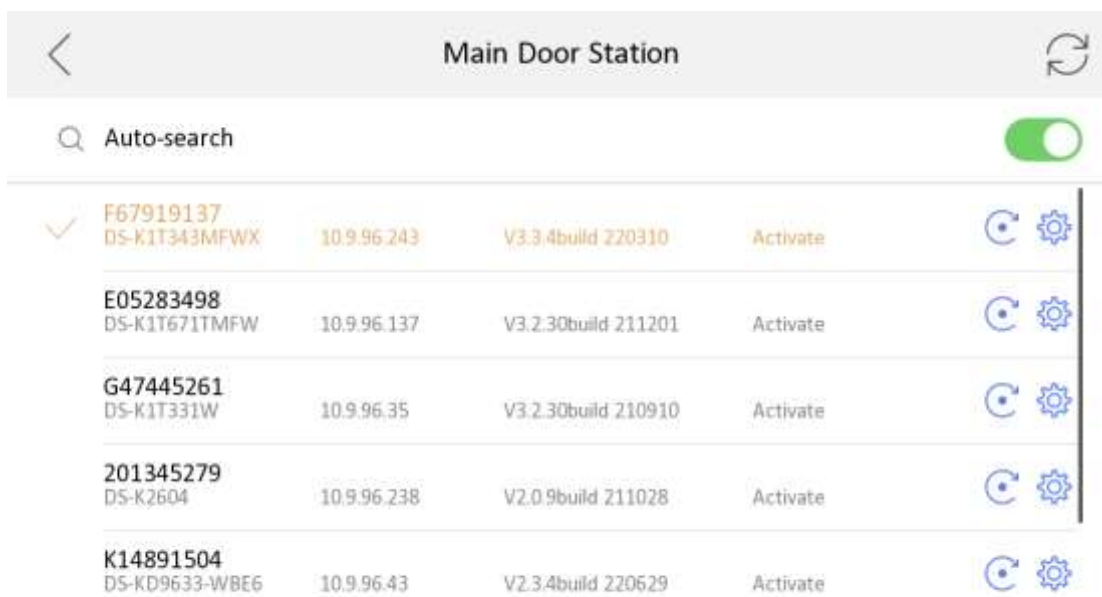

3. Add a prompt information when assign network IP address automatically.

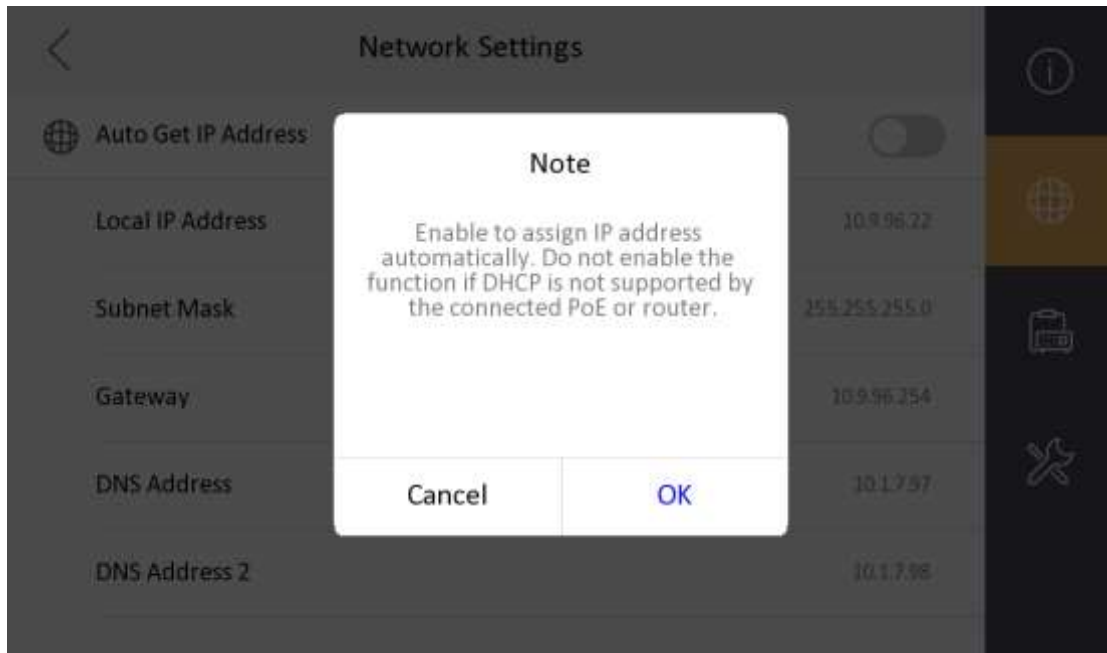

4. In configure wizard to related door station, when the door station password is different from the indoor station, prompt information will pop.

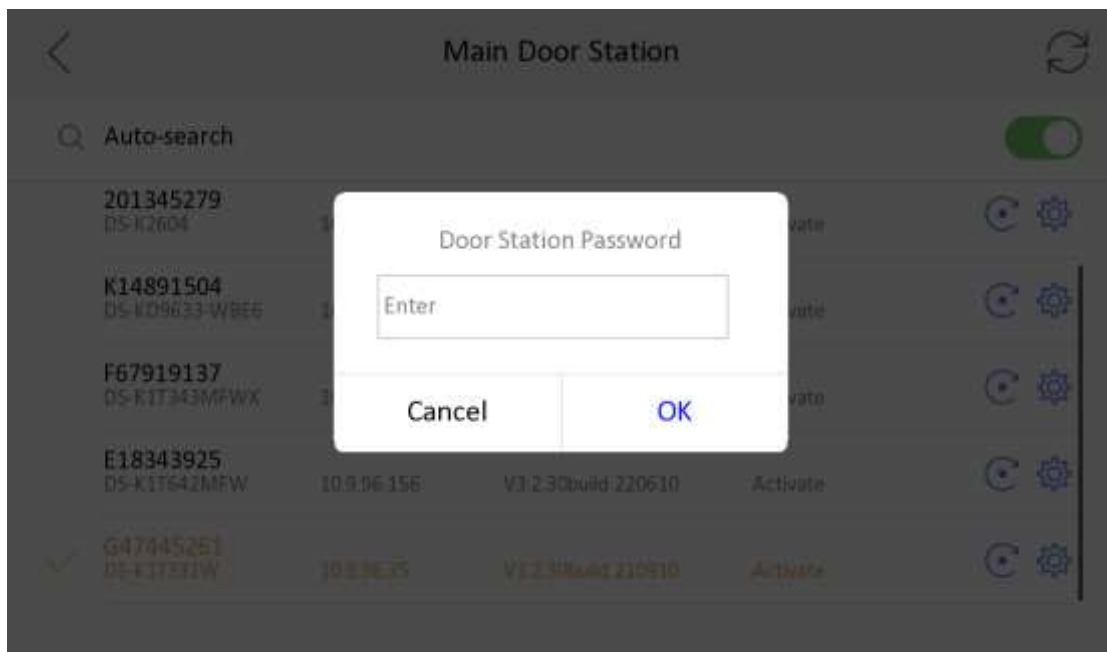

6 Series Indoor Stations

Version: V2.1.44_build220516

Release Note

(2022-05-22)


Firmware Basic Information	Firmware Version	V2.1.44_build220516
	Device Type	<p>DS-KH6350-WTE1</p> <p>DS-KH6320-LE1(B)</p> <p>DS-KH6320-LE1(B)/White</p> <p>DS-KH6320-TE1(B)</p> <p>DS-KH6320-WTE1(B)</p> <p>DS-KH6360-TE1</p> <p>DS-KH6360-WTE1</p>

Fix

1. Fixed a sync issue between device and Hik-Connect service.
2. Fixed a sync issue for Main-Sub indoor station mode.

New

1. Support the network parameters synchronized from villa door station.

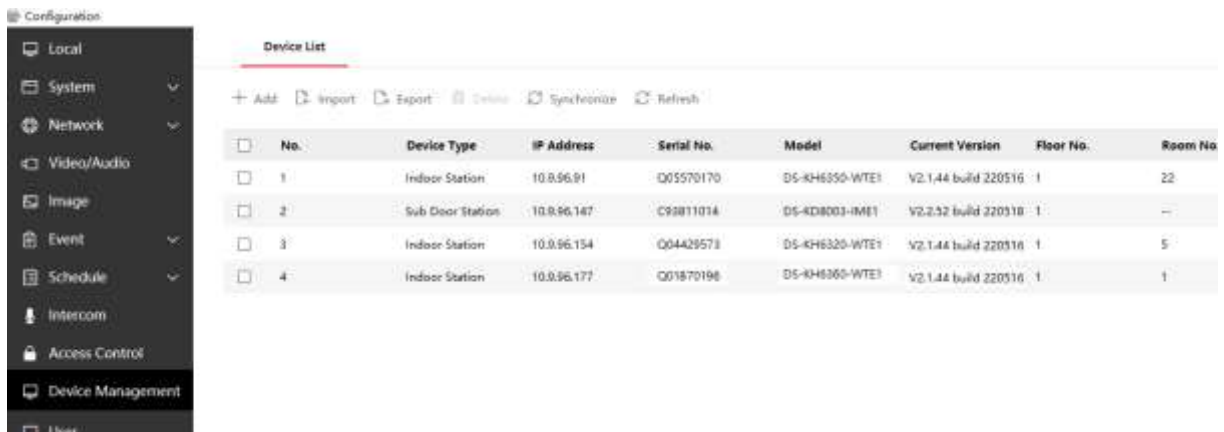

6 Series Indoor Stations

Version: V2.1.38_build220228

Release Note

(2022-03-01)

1. Firmware Basic Information

Firmware Basic Information	Firmware Version	V2.1.38_build220228
	Device Type	DS-KH6350-WTE1 DS-KH6320-LE1(B) DS-KH6320-LE1(B)/White DS-KH6320-TE1(B) DS-KH6320-WTE1(B) DS-KH6360-TE1 DS-KH6360-WTE1

Notes:

Please update firmware to the latest version to ensure the perfect user experience

1.1 Recommended Firmware

It is recommended to use the following devices and version together, because they can cooperate and work normally after the docking test.

Test resource	Device type	Version
Release device	DS-KH6350-WTE1	V2.1.38_build220228
Door Station	DS-KD9203-E6	V2.2.37_build210929
	KD8023-E6	V2.2.2_build 201019
	DS-KD8003-IME1	V2.2.52_build 211126
	DS-KB8113-IME1	V2.2.51_build 211110
	DS-KV8413-WME1(B)	V2.2.53_build 211104
Indoor Station	DS-KH9510-WTE1	V2.1.28_build210803
	DS-KH6320-LE1	V1.4.58_build210823
	KH6320-WTE1	V2.1.32_build210926
Main Station	KM9503	V1.0.32_build210926

Notes:

Test records only contain the cases for normally devices and do not represent all the scenarios and all the functions.

2. New Features

1. New version of the device is based on the last version and develop new appearances.



2. Support password recovery by security question. You can set as the following steps.

(1) "Wizard">Password reset method>change to security question.

Wizard-Password Reset Method 2/6

Change to Reserved Email

1. You father's first name.	>	<input type="text" value="Enter Answer"/>
2. You mother's first name.	>	<input type="text" value="Enter Answer"/>
3. Your teacher's first name in senior hig...	>	<input type="text" value="Enter Answer"/>

(2) Configuration>system maintenance>security settings>security question

<Security Question

1. You father's first name. >

2. You mother's first name. >

3. Your teacher's first name in senior hig... >

3. The indoor Station adds the configuration item of code stream transmission mode, supporting choosing unicast and multicast.

According to the web setting for the switchers or the routers.

<SIP Settings


Registration Password Configured >

stream transmission mode Unit Broadcast >

Unit Broadcast ✓

Group Broadcast

4. Add message and snapshot configuration options, which are closed by default. After opening, you can configure the deletion time of message and screenshot.

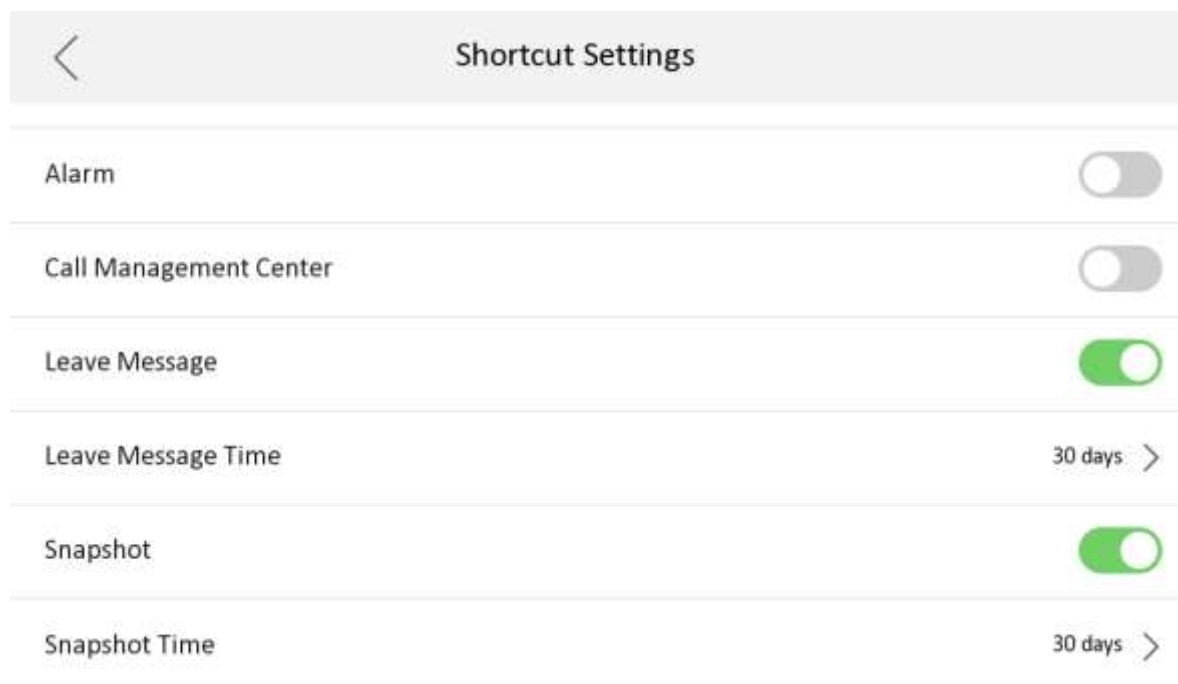

4. Modified

1. The function of password recovery by email is switched to the configuration wizard
2. The compatibility of standard SIP Server is improved: (1) ASTERISK (2) FreePBX (3) 3CX (4) ELASTIX (5) PBXware (6) miniSipServer (7) Brekeke (8) OpenSIPs (9) Kamailio

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.

Hikvision Digital Technology CO., Ltd.
No. 555 Qianmo Road, Binjiang District, Hangzhou 310052,
China
Tel: +86-571-8807-5998
FAX: +86-571-8993-5635
Email: support@hikvision.com