

Android Indoor Station Firmware

V2.1.22_210616 Release Note

(2021-06-23)

Device Model	DS-KH9310-WTE1, DS-KH9510-WTE1
Firmware Version	Android Indoor Station : V2.1.22_210616
iVMS-4200 Version	Latest baseline
Hik-Connect APP	Latest version

Modify

1. Optimize the compatibility with door station in protocol 1.0 firmware.
2. Solved the problem that the custom ringtone did not take effect after restarting.

Android Indoor Station Firmware

V2.1.22_210525 Release Note

(2021-06-03)

Device Model	DS-KH9310-WTE1, DS-KH9510-WTE1
Firmware Version	Android Indoor Station : V2.1.22_build210525
iVMS-4200 Version	Latest baseline
Hik-Connect APP	Latest version

New Function

1. On the basis of supporting English, French, Spanish, German, Italian, newly added multi-language Polish, Portuguese (Brazil), Russian, Turkish, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian.
2. Add Hik-Connect Service Settings in Wizard.

Wizard-Hik-Connect Service Settings 4/5

 Enable Hik-Connect Service

LBS Server litedev.hik-connect.com

Verification Code


Previous


Next

Skip

Modify

1. Hik-Connect service is disabled by default for privacy protection and add Enable Switch for verification code display in Hik-Connect Server Settings.

 **Hik-Connect Server Settings**

 Cloud Service

LBS litedev.hik-connectru.com

Verification Code

Hik-Connect Server Status Disconnected



< Hik-Connect Server Settings

Cloud Service

LBS litedev.hik-connectru.com

Verification Code 7a

Hik-Connect Server Status Disconnected



Android Indoor Station Firmware V2.1.16_210316 Release Note (2021-03-16)

Device Model	DS-KH9310-WTE1, DS-KH9510-WTE1
Firmware Version	Android Indoor Station : V2.1.16_210316
iVMS-4200 Version	3.4.0.10 Build201214
Hik-Connect APP	4..11.0.927220

New Function

1. Update Hik-Connect APP to support access to AXpro and MinMoe.

Modify

Android Indoor Station Firmware V2.1.16_201223 Release Note (2021-01-05)

Device Model	DS-KH9310-WTE1, DS-KH9510-WTE1
Firmware Version	Android Indoor Station : V2.1.16_201223
iVMS-4200 Version	3..4.0.10 Build201214
Hik-Connect APP	4..11.0.927220

New Function

1. Update Hik-Connect APP to support access to AXpro and MinMoe.
2. If the third-party APP only supports vertical screen, it will be forced to display horizontally.

Modify

1. Modify the language display of some errors

Android Indoor Station Firmware V2.1.8_200515 Release Note (2020-06-01)

Device Model	DS-KH9310-WTE1, DS-KH9510-WTE1
Firmware Version	Indoor Station: V2.1.8_build200714
iVMS-4200 Version	V3.3.1.4 build 200806
Hik-Connect APP	V4.6.2.0724


Function Description

1. New Android UI interface.
2. Languages
 - a) Support multi-language in 5 countries, language types include English, French, Spanish, German, and Italian;

b) Support local switching and remote switching of different languages, effective immediately.


3. Local configuration wizard

a. Activation interface

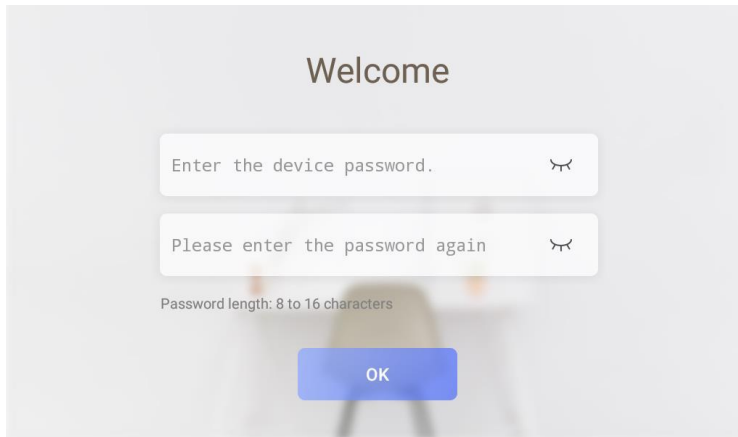


The image shows a 'Welcome' screen for device activation. It features two input fields for password entry. The first field is labeled 'Enter the device password.' and the second is 'Please enter the password again'. Both fields have a small icon of a person with arms crossed to the right. Below the second field, there is a note: 'Password length: 8 to 16 characters'. At the bottom center, there is a blue button labeled 'OK'.

b. Language interface

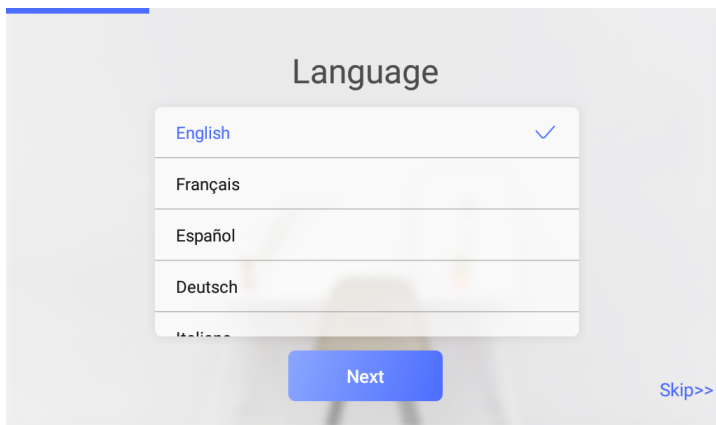


The image shows a 'Language' selection screen. It has a list of languages: English (selected with a blue checkmark), Français, Español, Deutsch, and Maltese. Below the list is a blue button labeled 'Next'. In the bottom right corner, there is a link labeled 'Skip>>'.

c. Network Setting interface

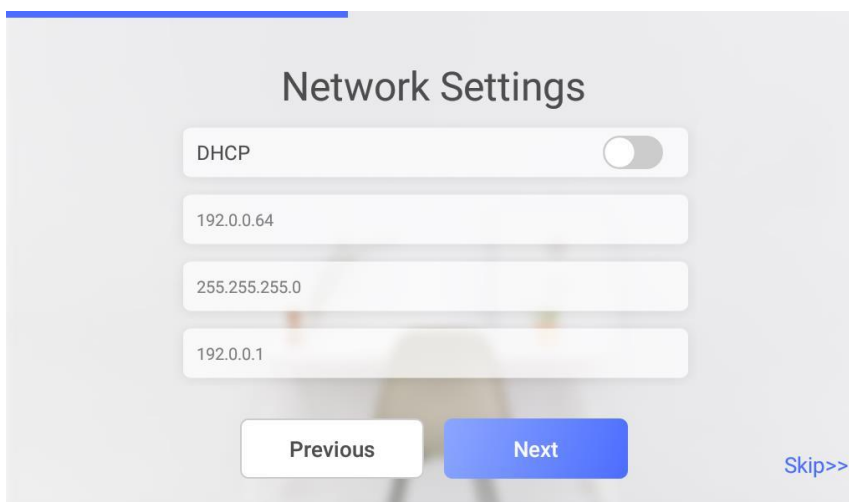


The image shows a 'Network Settings' screen. It features a toggle switch for 'DHCP' which is currently turned off. Below this are three input fields for IP address configuration: the first contains '192.0.0.64', the second contains '255.255.255.0', and the third contains '192.0.0.1'. At the bottom, there are two buttons: 'Previous' (white) and 'Next' (blue). In the bottom right corner, there is a link labeled 'Skip>>'.

d. Indoor Station Parameter Settings

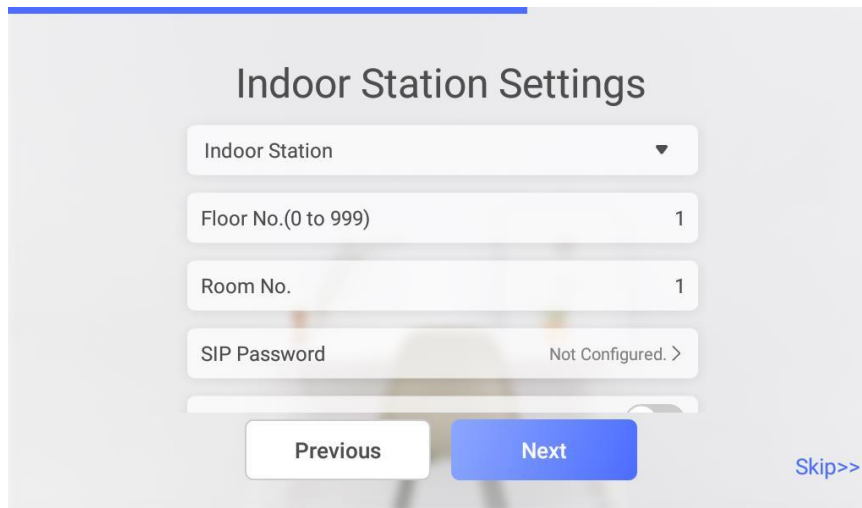


The screenshot shows the 'Indoor Station Settings' form. It includes a dropdown menu for 'Indoor Station', input fields for 'Floor No.(0 to 999)' and 'Room No.' both set to '1', and a 'SIP Password' field with the text 'Not Configured.' and a right-pointing chevron. At the bottom, there are three buttons: 'Previous', 'Next' (highlighted in blue), and 'Skip>>'.

SIP password is actually Register Password, which is suitable for our security 2.0 protocol. They can communicate normally only when the **SIP passwords (Register passwords)** of the door station, indoor station and indoor extension are the **same**.

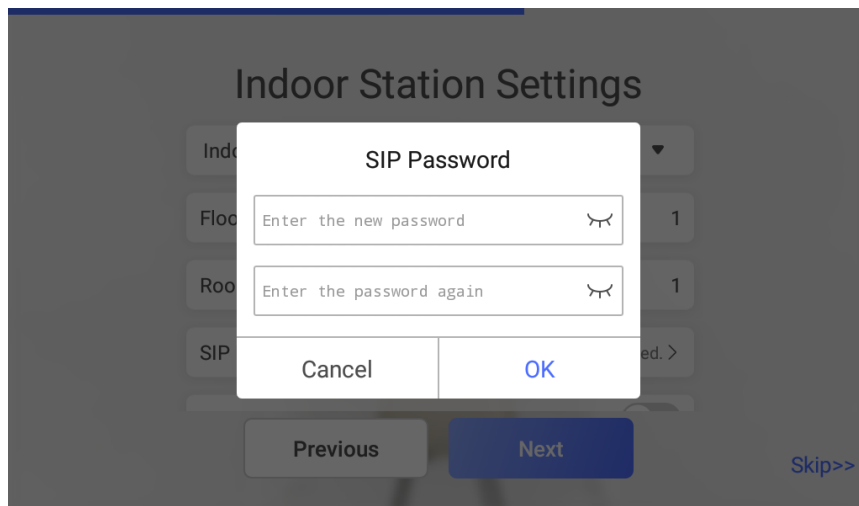


The screenshot shows a modal dialog box titled 'SIP Password' overlaid on the 'Indoor Station Settings' form. The dialog has two input fields: 'Enter the new password' and 'Enter the password again', both with eye icons for visibility. At the bottom of the dialog are 'Cancel' and 'OK' buttons. The background form is dimmed.

e. Indoor extension Parameter Settings

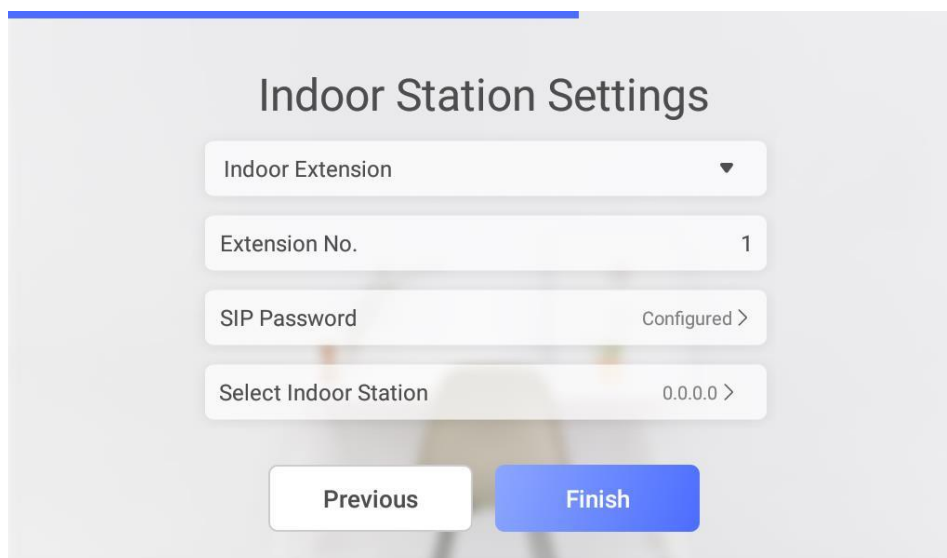


The screenshot shows the 'Indoor Extension Parameter Settings' form. It includes a dropdown menu for 'Indoor Extension', input fields for 'Extension No.' and 'SIP Password' (with 'Configured' and a chevron), and a 'Select Indoor Station' field with '0.0.0.0' and a chevron. At the bottom, there are two buttons: 'Previous' and 'Finish' (highlighted in blue).


f. Activate and connect door station

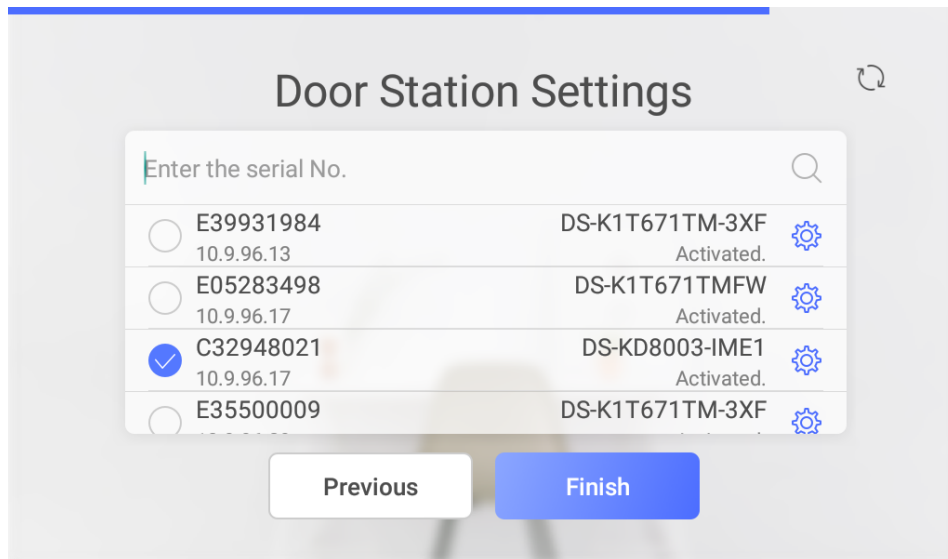


g. Local main interface

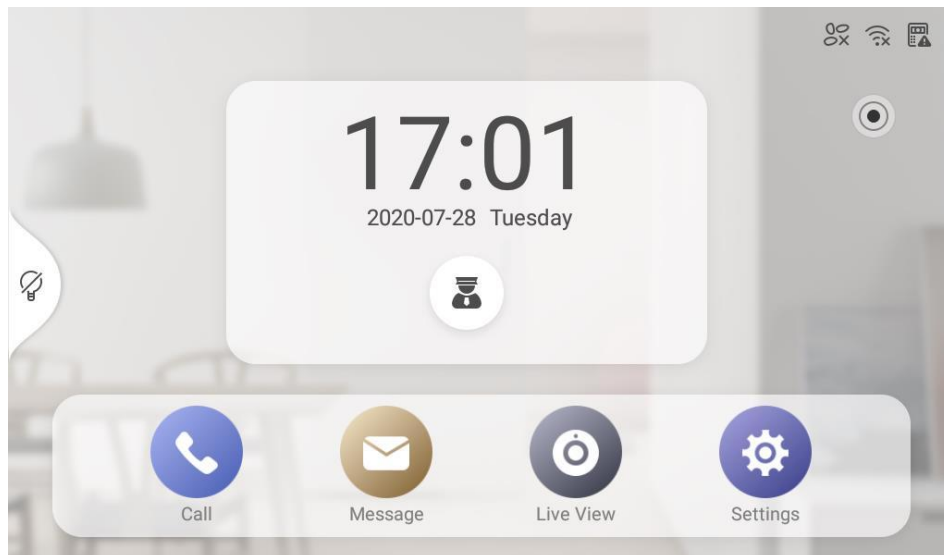

3. Support decoration light on or off, but only supports local modification

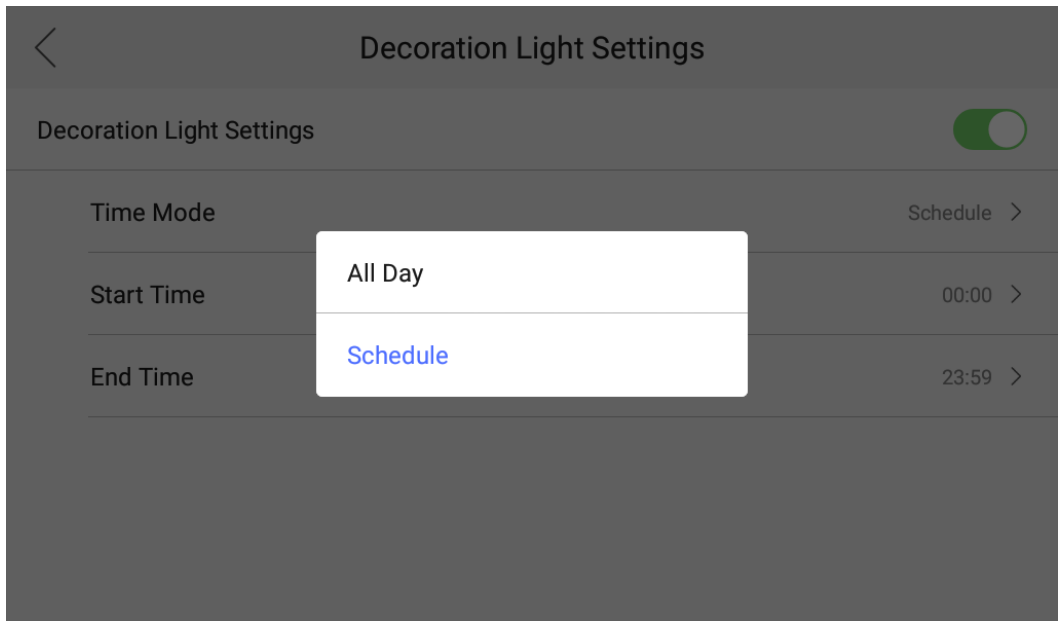


5. Tamper alarm function

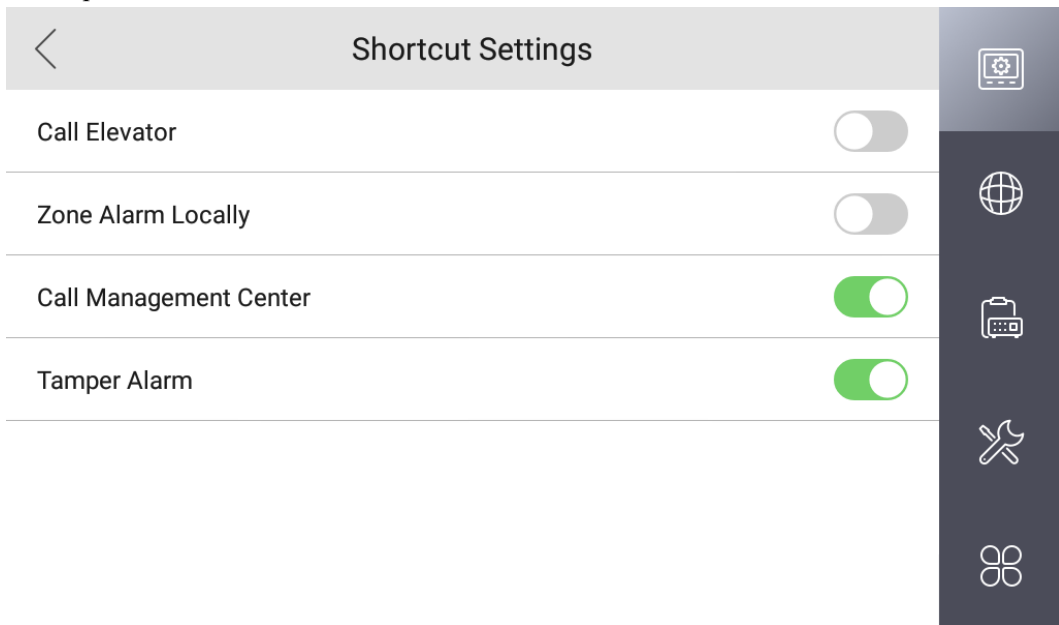


6. Local interface login Hik-Connect App function


a. Hik-Connect function is hidden in this position by default.

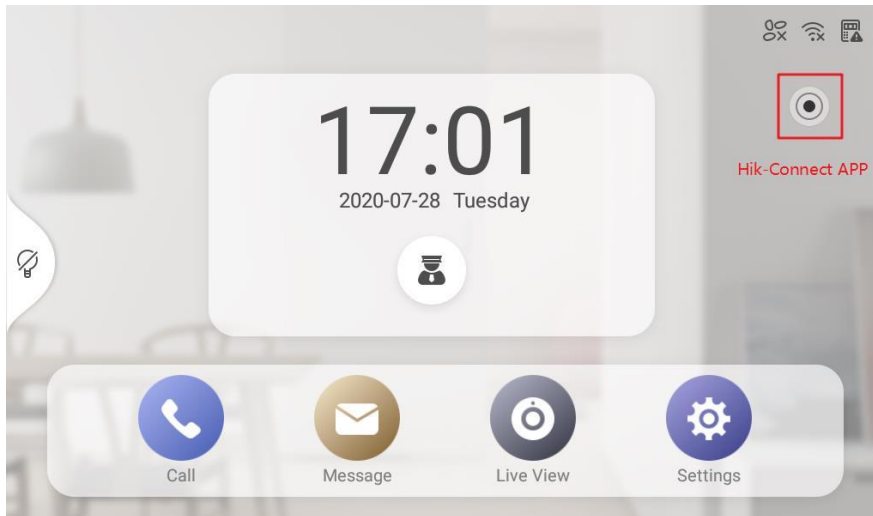

b. If you are not logged in, it will show 'Login the Hik-Connect'.

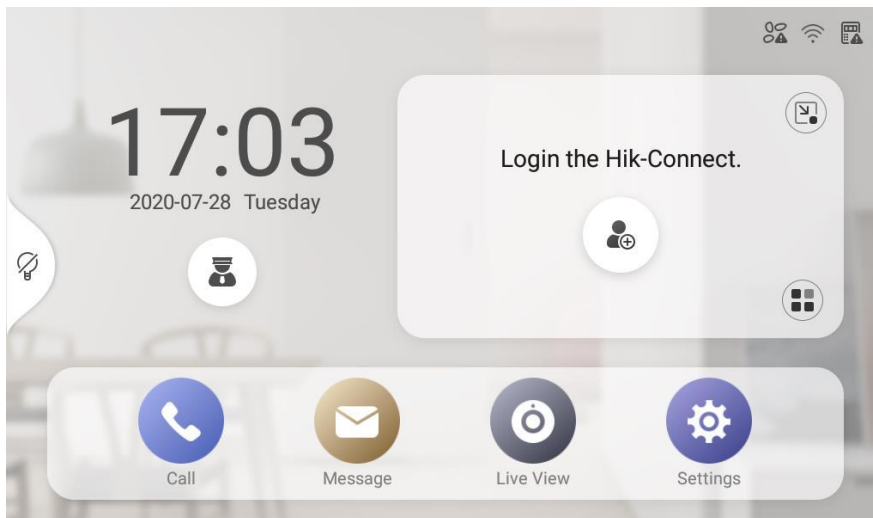


c. Android indoor station does not support online registration, you need to prepare the account password of Hik-Connect in advance.

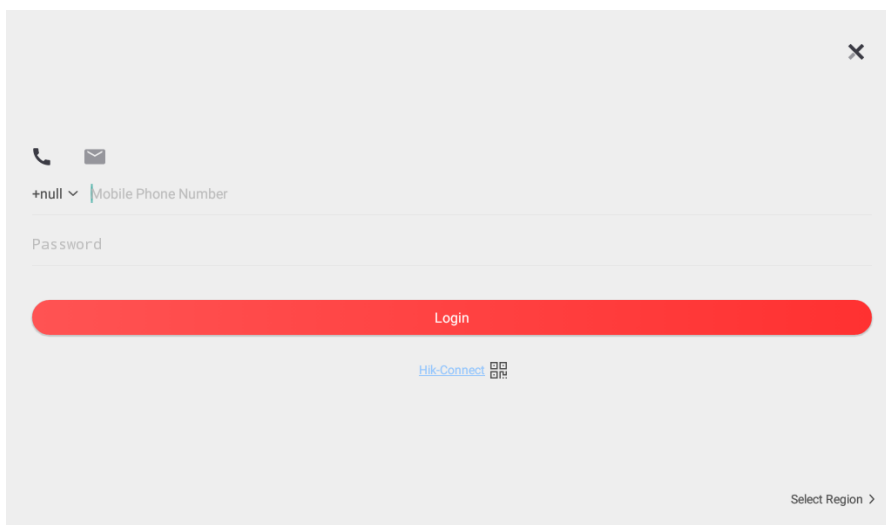


d. Function display: you can arm and disarm the alarm device or preview the playback back-end

device, etc.

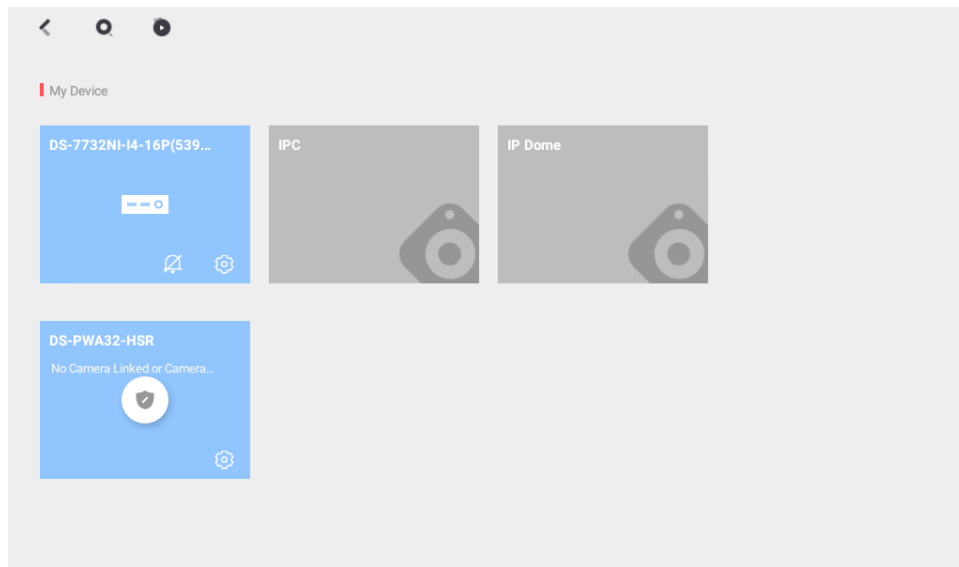


7. The device supports the use of Hikvision certified Android APP

a. Android APP can be imported through iVMS-4200

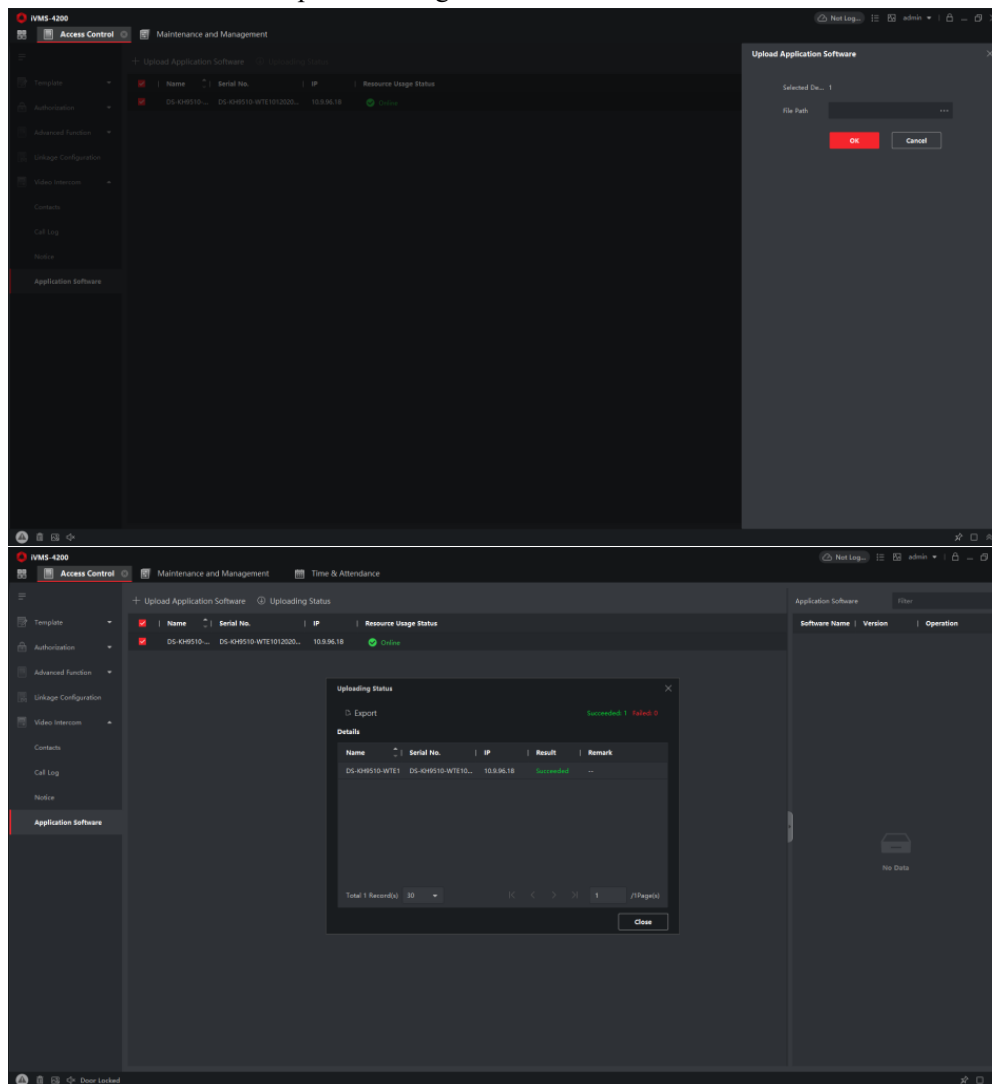

b. The installed third-party APP will be displayed on the right side of Setting.

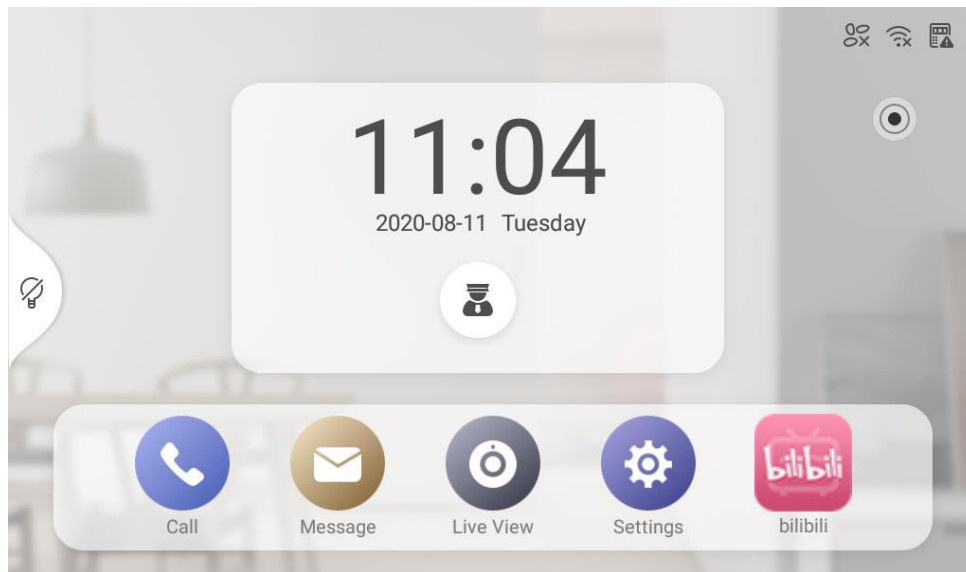

NOTE :

1. This version does not support DST function
2. Indoor station Local Hik-Connect will not display the video intercom system or receive any push of the video intercom system.
3. The Android indoor station can only be used with the Android indoor station as Main and IndoorExtension.