

# TEST REPORT

**Application No.:** SHEM1905013670CR  
**Applicant:** Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Applicant:** No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China  
**Manufacturer:** Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Manufacturer:** No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China  
**Factory:** 1, Hangzhou Hikvision Technology Co., Ltd.  
 2, Hangzhou Hikvision Electronics Co., Ltd.  
**Address of Factory:** 1, No.700,Dongliu Road, Binjiang District, Hangzhou City,Zhejiang, 310052, China  
 2, No.299,Qiushi Road,Tonglu Economic Development Zone,Tonglu County, Hangzhou,Zhejiang,310052,China

**Equipment Under Test (EUT):**

**EUT Name:** Wireless Siren  
**Model No.:** DS-PSG-WO-868, DS-PSG-WO-868UHK, DS-PSG-WO-868CKV, DS-PSG-WO-868UVS, DS-PSG-WO-868KVO, DS-PSG-WO-868HUN  
 □ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**Trade mark:** HIKVISION

**Standard(s) :** EN 55032:2015  
 EN 50130-4:2011 +A1:2014

**Date of Receipt:** 2019-05-30

**Date of Test:** 2019-06-04 to 2019-06-06

**Date of Issue:** 2019-06-27

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Parlan Zhan

Parlan Zhan  
E&E Section Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**



Revision Record			
Version	Description	Date	Remark
00	Original	2019-06-27	/

Authorized for issue by:			
			
		_____ Vincent Zhu / Project Engineer	
			
		_____ Eddy Zong / Reviewer	

## 2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (30MHz-1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Radiated Immunity(80MHz-2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less

### Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model DS-PSG-WO-868 was tested since their differences were the model number and appearance.

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 GENERAL INFORMATION .....</b>	<b>5</b>
4.1 DETAILS OF E.U.T. ....	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY .....	5
4.4 TEST LOCATION .....	6
4.5 TEST FACILITY .....	6
4.6 DEVIATION FROM STANDARDS .....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST .....	6
<b>5 EQUIPMENT LIST .....</b>	<b>7</b>
<b>6 EMISSION TEST RESULTS .....</b>	<b>9</b>
6.1 RADIATED EMISSIONS (30MHZ-1GHZ) .....	9
6.2 RADIATED EMISSIONS (ABOVE 1GHZ) .....	12
<b>7 IMMUNITY TEST RESULTS .....</b>	<b>15</b>
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014.....	15
7.2 ELECTROSTATIC DISCHARGE .....	16
7.3 RADIATED IMMUNITY(80MHZ-2.7GHZ) .....	17
<b>8 PHOTOGRAPHS .....</b>	<b>18</b>
8.1 RADIATED EMISSIONS (30MHZ-1GHZ) TEST SETUP.....	18
8.2 RADIATED EMISSIONS (ABOVE 1GHZ) TEST SETUP.....	18
8.3 ELECTROSTATIC DISCHARGE TEST SETUP .....	19
8.4 RADIATED IMMUNITY(80MHZ-2.7GHZ) TEST SETUP.....	19
8.5 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) .....	20

## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC 3V by 4\* CR123A battery  
Test voltage: DC 3V

### 4.2 Description of Support Units

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	±2.6dB (9kHz to 150kHz)
		±2.3dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	±1.9 dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	±4.1 dB (150kHz to 30MHz)
4	Radiated Power	±3.0dB
5	Radiated emission	±4.4dB (30MHz-1GHz)
		±4.8dB (1GHz-6GHz)
		±5.2dB (6GHz-18GHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (Certificate No. 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). Certificate No. 201034-0.

- **FCC –Designation Number: CN5033**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

IC Registration No.: 8617A-1. CAB identifier: CN0020.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

#### 4.8 Monitoring of EUT for All Immunity Test

Visual: Working status of EUT

## 5 Equipment List

<b>Radiated Emissions (30MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2018-12-20	2019-12-19
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
Low Amplifier	CLAVIIO	BDLNA-0001-412010	SHEM164-1	2018-08-13	2019-08-12

<b>Radiated Emissions (above 1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2018-12-20	2019-12-19
CONTROLLER	INNCO	CO200	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Double ridged broadband horn ANTENNA	SCHWARZBECK	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
High-amplifier	SCHWARZBECK	SCU-F0118-G40-BZ4-CS	SHEM050-2	2018-12-20	2019-12-19
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
High Amplifier	CLAVIIO	BDLNA-0118-352810	SHEM165-1	2018-08-13	2019-08-12

<b>Electrostatic Discharge</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2018-08-13	2019-08-12

<b>Radiated Immunity(80MHz-2.7GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Signal generator	Rohde & Schwarz	SMJ100A	SHEM141-1	2018-08-13	2019-08-12
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-2	2018-12-20	2019-12-19
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2018-12-20	2019-12-19
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2018-12-20	2019-12-19
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2018-12-20	2019-12-19
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2018-12-11	2019-12-10
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21



General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital pressure meter	YONGZHI	DYM3-01	SHEM082-1	2018-01-25	2021-01-24
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-1~6	2018-08-31	2019-08-30
Digital Multimeter	FLUKE	17B	SHEM043-3	2018-09-03	2019-09-02
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	316	SHEM001-1	2018-12-20	2019-12-19



## 6 Emission Test Results

### 6.1 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz-230MHz	40 dB(μV/m) quasi-peak
230MHz-1GHz	47 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz


#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

Test mode      a:Alarm mode\_ Establish communication between EUT and HUB via wireless function, and then keep EUT in monitoring mode.


#### 6.1.2 Test Setup Diagram

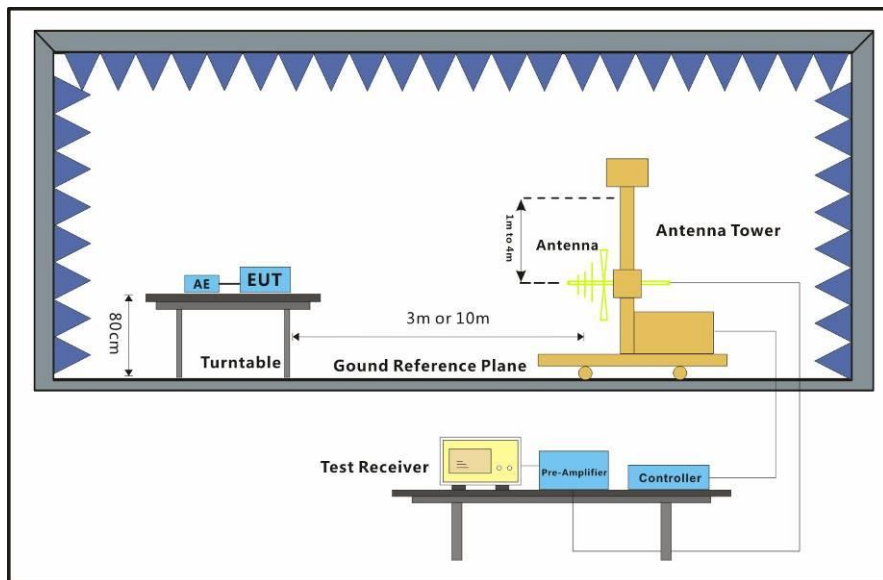

#### 6.1.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Mode:a; Polarization:Horizontal

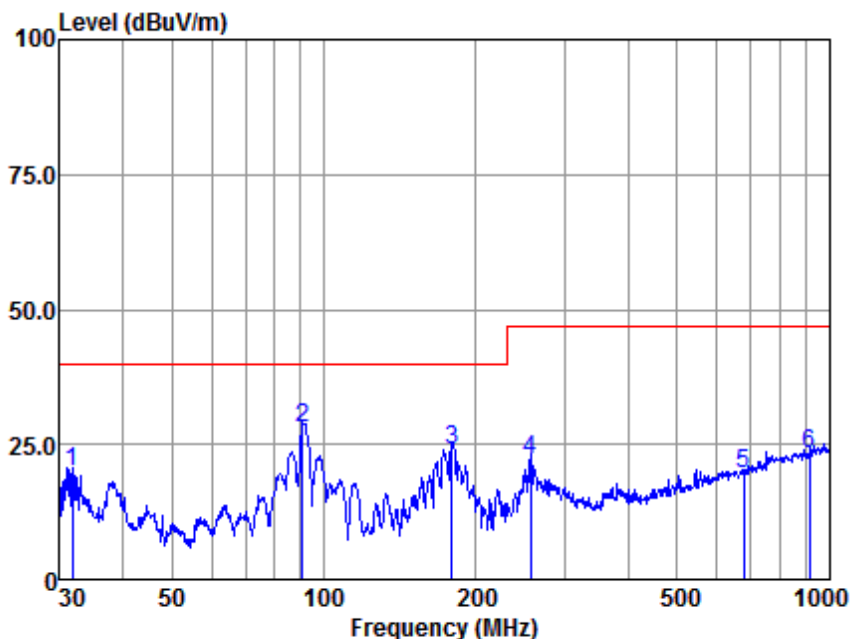


Antenna Polarity :HORIZONTAL  
 EUT/Project :3670CR  
 Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.731	46.21	15.49	0.45	42.37	19.78	40.00	-20.22	QP
2	90.855	61.24	8.23	1.00	42.29	28.18	40.00	-11.82	QP
3	179.386	52.83	11.88	1.63	42.20	24.14	40.00	-15.86	QP
4	256.521	50.23	11.73	2.21	42.10	22.07	47.00	-24.93	QP
5	677.580	37.04	20.03	4.07	41.74	19.40	47.00	-27.60	QP
6	912.862	37.59	22.85	4.59	41.61	23.42	47.00	-23.58	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:a; Polarization:Vertical

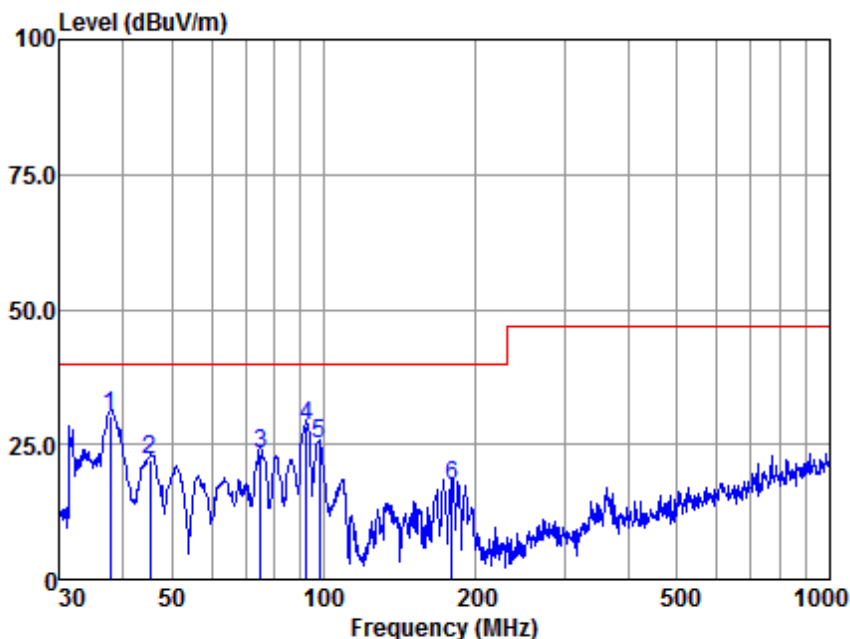

Antenna Polarity :VERTICAL  
 EUT/Project :3670CR  
 Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	37.812	56.11	16.11	0.49	42.34	30.37	40.00	-9.63	QP
2	45.375	51.02	13.04	0.41	42.33	22.14	40.00	-17.86	QP
3	74.919	55.34	9.64	0.67	42.26	23.39	40.00	-16.61	QP
4	92.462	61.27	8.42	1.05	42.30	28.44	40.00	-11.56	QP
5	97.798	56.93	9.25	1.10	42.31	24.97	40.00	-15.03	QP
6	179.386	46.19	11.88	1.63	42.20	17.50	40.00	-22.50	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

## 6.2 Radiated Emissions (above 1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
1GHz-3GHz	70 dB( $\mu$ V/m) peak, 50 dB( $\mu$ V/m) average
3GHz-6GHz	74 dB( $\mu$ V/m) peak, 54dB( $\mu$ V/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz


### 6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1020 mbar

Test mode      a:Alarm mode\_Establish communication between EUT and HUB via wireless function, and then keep EUT in monitoring mode.


### 6.2.2 Test Setup Diagram

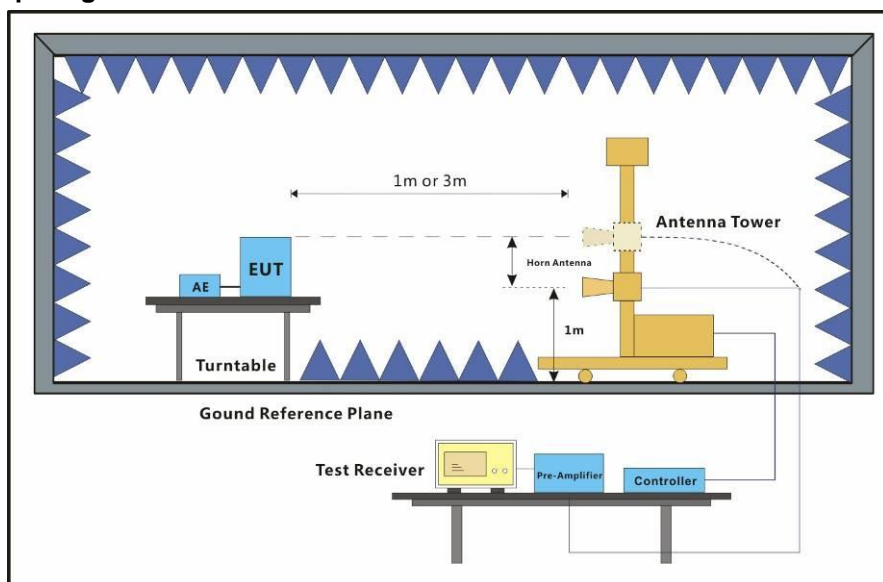

### 6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Mode:a; Polarization:Horizontal

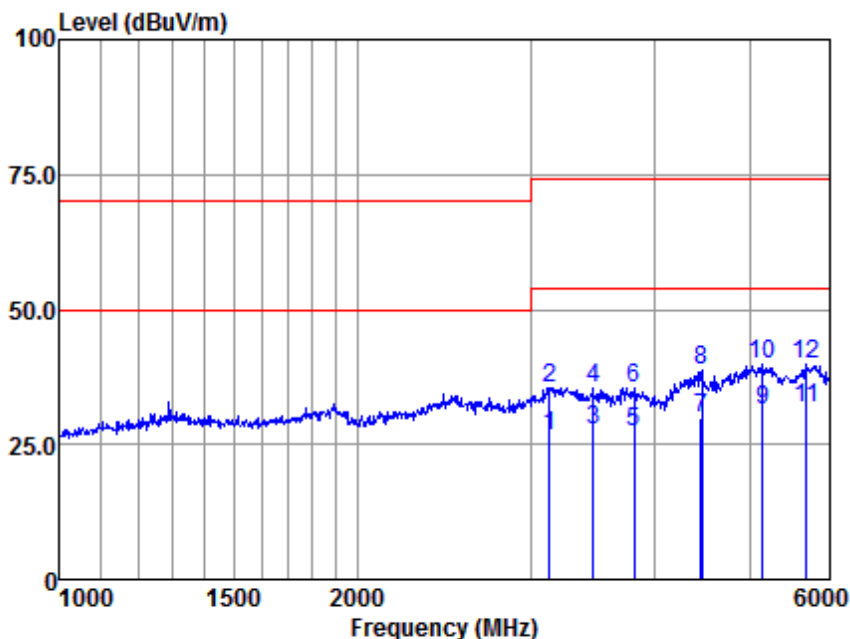


Antenna Polarity :HORIZONTAL  
 EUT/Project :3670CR  
 Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3130.995	31.41	28.58	8.77	42.32	26.44	54.00	-27.56	Average
2	3130.995	40.55	28.58	8.77	42.32	35.58	74.00	-38.42	Peak
3	3461.456	31.68	28.78	9.54	42.36	27.64	54.00	-26.36	Average
4	3461.456	39.38	28.78	9.54	42.36	35.34	74.00	-38.66	Peak
5	3806.281	30.01	29.36	10.22	42.39	27.20	54.00	-26.80	Average
6	3806.281	38.39	29.36	10.22	42.39	35.58	74.00	-38.42	Peak
7	4456.338	30.39	30.53	11.56	42.45	30.03	54.00	-23.97	Average
8	4456.338	39.24	30.53	11.56	42.45	38.88	74.00	-35.12	Peak
9	5143.163	29.52	31.69	12.59	42.52	31.28	54.00	-22.72	Average
10	5143.163	38.25	31.69	12.59	42.52	40.01	74.00	-33.99	Peak
11	5696.195	28.64	32.18	13.52	42.61	31.73	54.00	-22.27	Average
12	5696.195	36.66	32.18	13.52	42.61	39.75	74.00	-34.25	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:a; Polarization:Vertical

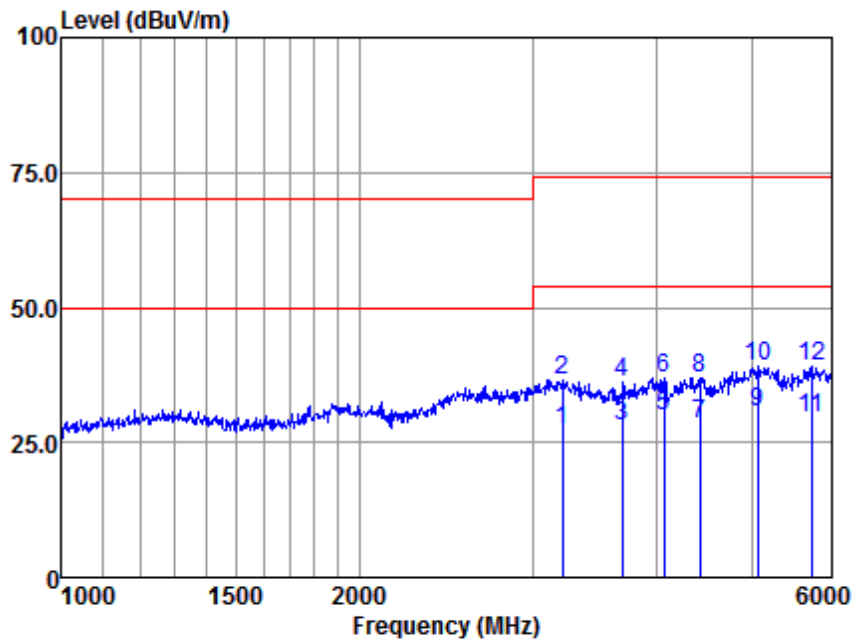

Antenna Polarity :VERTICAL  
EUT/Project :3670CR  
Test mode :a

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3210.528	32.09	28.64	9.05	42.33	27.45	54.00	-26.55	Average
2	3210.528	41.11	28.64	9.05	42.33	36.47	74.00	-37.53	Peak
3	3692.090	30.56	29.16	10.69	42.38	28.03	54.00	-25.97	Average
4	3692.090	38.52	29.16	10.69	42.38	35.99	74.00	-38.01	Peak
5	4067.171	30.96	29.81	11.40	42.42	29.75	54.00	-24.25	Average
6	4067.171	38.11	29.81	11.40	42.42	36.90	74.00	-37.10	Peak
7	4416.593	29.28	30.47	11.10	42.45	28.40	54.00	-25.60	Average
8	4416.593	37.92	30.47	11.10	42.45	37.04	74.00	-36.96	Peak
9	5060.890	28.76	31.64	12.64	42.51	30.53	54.00	-23.47	Average
10	5060.890	37.27	31.64	12.64	42.51	39.04	74.00	-34.96	Peak
11	5737.167	26.36	32.23	13.52	42.62	29.49	54.00	-24.51	Average
12	5737.167	35.93	32.23	13.52	42.62	39.06	74.00	-34.94	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

## 7 Immunity Test Results

### 7.1 Performance Criteria Description in EN 50130-4:2011 +A1:2014


There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.

## 7.2 Electrostatic Discharge

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 61000-4-2:2009
Number of Discharge:	Minimum 10 times at each test point for Air Discharge Minimum 50 times at each test point for Contact or VCP & HCP Discharge
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Criteria for compliance:	There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

### 7.2.1 Test Setup Diagram

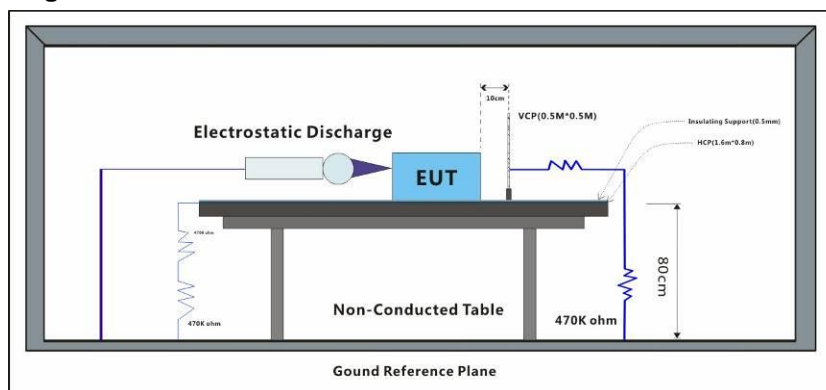

### 7.2.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:Alarm mode\_Establish communication between EUT and HUB via wireless function, and then keep EUT in monitoring mode.

### 7.2.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A
Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A

### Results:

A: No degradation in the performance of the EUT was observed.



### 7.3 Radiated Immunity(80MHz-2.7GHz)


Test Requirement: EN 50130-4:2011 +A1:2014  
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010  
 Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

Criteria for compliance: There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at 10 V/m, providing.

- a) there is no permanent damage or change to the EUT (e.g. no corruption of memory or changes to programmable settings etc.);
- b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- c) there is no observable deterioration of the picture at 1 V/m.

#### 7.3.1 Test Setup Diagram

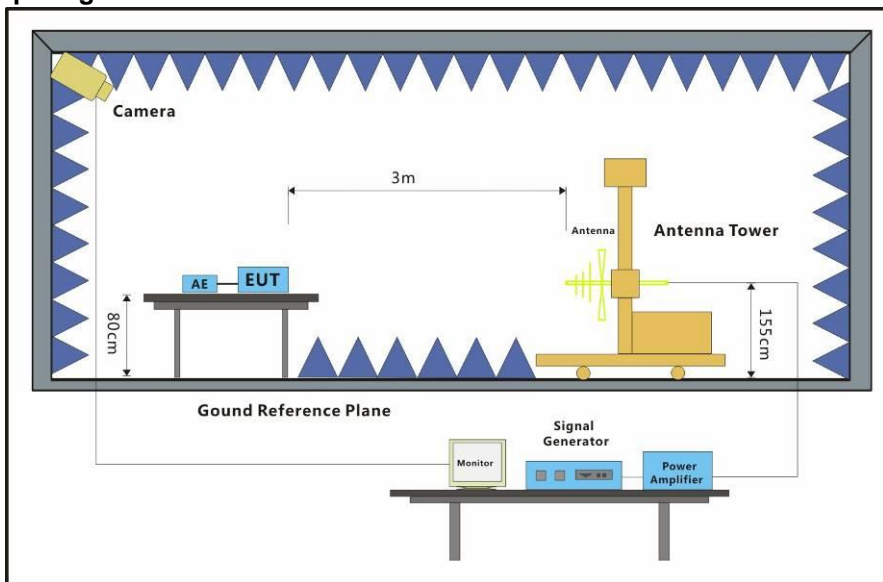

#### 7.3.2 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar  
 Test mode: a:Alarm mode\_Establish communication between EUT and HUB via wireless function, and then keep EUT in monitoring mode.

#### 7.3.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	1	Front	3s	A
80MHz-2.7GHz	1	Back	3s	A
80MHz-2.7GHz	1	Left	3s	A
80MHz-2.7GHz	1	Right	3s	A
80MHz-2.7GHz	1	Top	3s	A
80MHz-2.7GHz	1	Underside	3s	A

#### Results:

A: No degradation in the performance of the EUT was observed.

## 8 Photographs

### 8.1 Radiated Emissions (30MHz-1GHz) Test Setup




### 8.2 Radiated Emissions (above 1GHz) Test Setup




### 8.3 Electrostatic Discharge Test Setup




### 8.4 Radiated Immunity(80MHz-2.7GHz) Test Setup

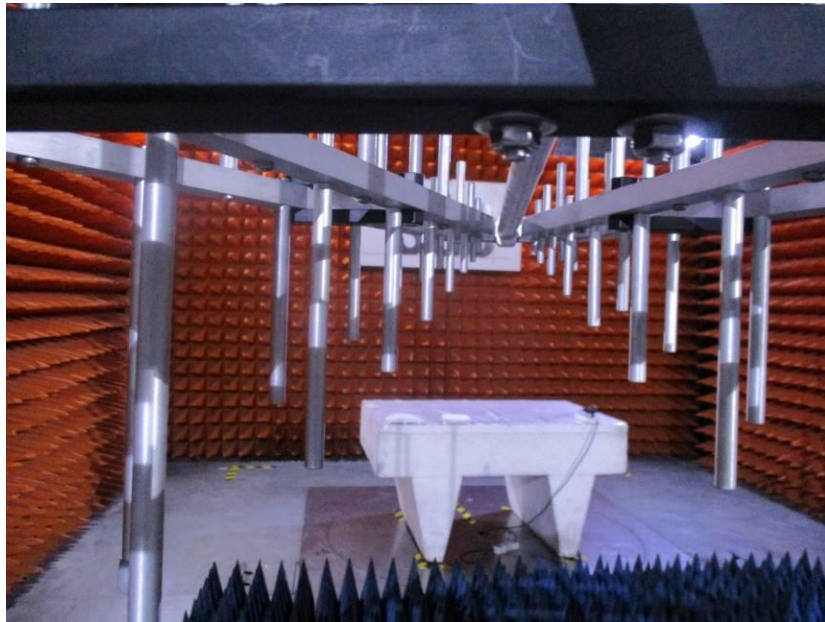


### 8.5 EUT Constructional Details (EUT Photos)

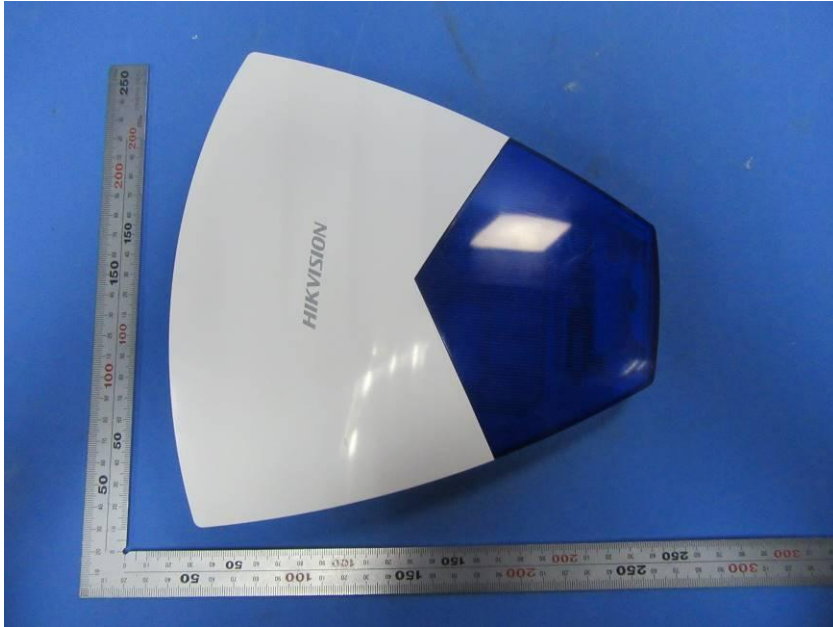



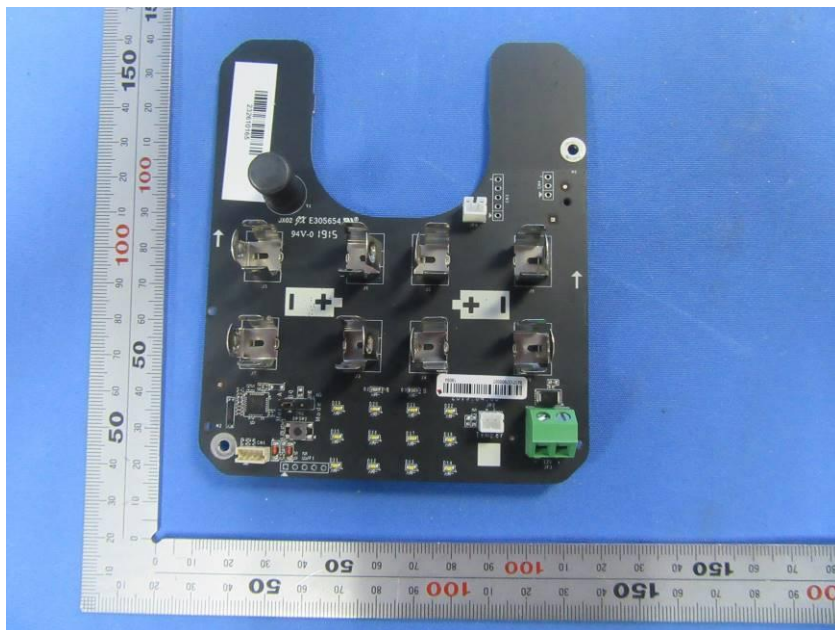

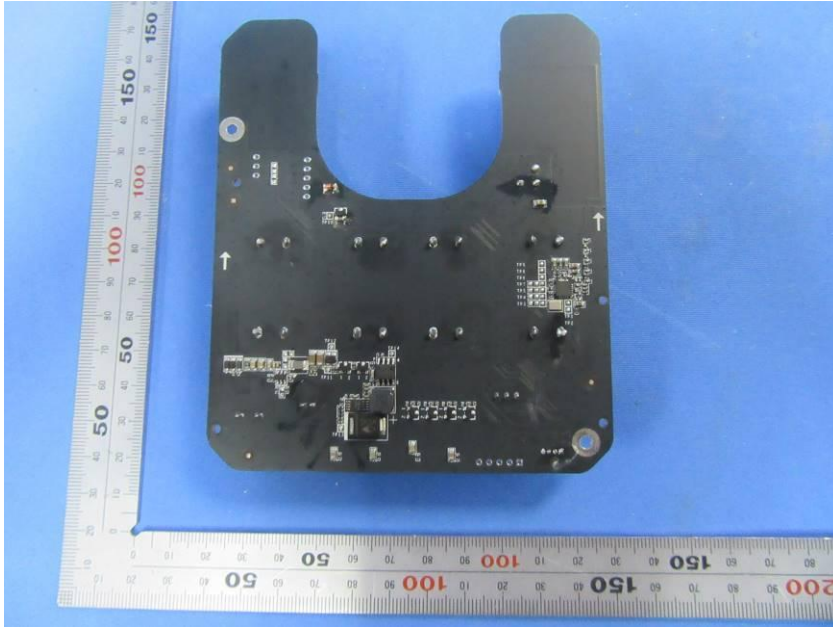

- End of the Report -