

## iVMS-4200

**Version:V2.6.1.2 build170318**

### Release Note

**(2017-4-6 External)**

#### General Information


Software Version	V2.6.1.2 build20170318
Network SDK Lib	V5.2.7.5 build20170217
Play Lib	V7.3.2.77 build20170316
VCA Config Lib	V3.4.12.1 build20170222
SADP Lib	V4.2.1.5 build20170316

#### Supported devices:

Front-end, Back-end products, video intercom products, access control products, security control panels- : released before the end of October, 2016.

## V2.6.1.2 Key Updates

1. Provide adding devices by Hik-Connect Domain.

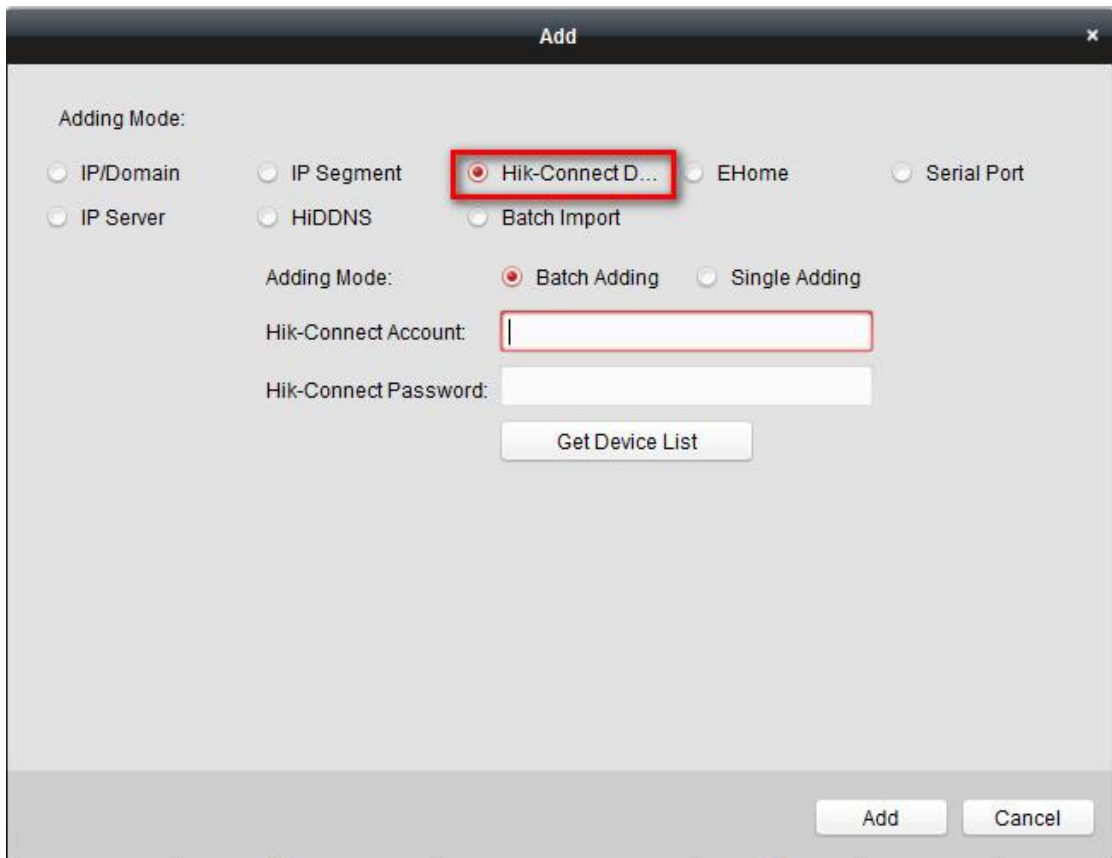

The screenshot shows a dialog box titled "Add" with a close button (X) in the top right corner. The "Adding Mode:" section contains five radio button options: "IP/Domain", "IP Segment", "Hik-Connect D..." (which is selected and highlighted with a red box), "EHome", and "Serial Port". Below these, there are two more radio button options: "Batch Adding" (selected) and "Single Adding". There are two text input fields: "Hik-Connect Account:" and "Hik-Connect Password:", both highlighted with red boxes. A "Get Device List" button is positioned below the password field. At the bottom right of the dialog, there are "Add" and "Cancel" buttons.

Figure 1

Add devices in batch:

Input the Hik-Connect Account and password, click Get Device List button to show the devices added to Hik-Connect account. Then select the devices as desired.

Adding Mode:

IP/Domain     IP Segment     Hik-Connect D...     EHome     Serial Port

IP Server     HiDDNS     Batch Import

Current Account: 11guah    [Logout](#)    Search...

<input type="checkbox"/> Nickname	IP	Device Serial No.
<input type="checkbox"/> M (... 10...	...92	CS-89588
<input type="checkbox"/> D (... 10...	...8	DS-46843725
<input type="checkbox"/> D (... 10...	...8	DS-1891952
<input type="checkbox"/> D (... 10...	...8	DS-2418E
<input type="checkbox"/> M (... 10...	...92	CS-

User Name:    Password:

Export to Group  
Set the device name as the group name and add all the channels connected to the device to the group.

[Add](#)    [Cancel](#)

Figure 2

Add single device:

Input the device's required information and this device will be added to the client.

**Add**

Adding Mode:

IP/Domain     IP Segment     Hik-Connect D...     EHome     Serial Port

IP Server     HiDDNS     Batch Import

Adding Mode:     Batch Adding     Single Adding

Nickname:

Device Serial No.:

User Name:

Password:

Hik-Connect Account:

Hik-Connect Password:

Export to Group

Set the device name as the group name and add all the channels connected to the device to the group.

Figure 3

2. 69 series decoder has been supported to use on the Video Wall module.