



## AE-VC021P-IRS

700TVL 1/3" DIS IR Dome Mobile Camera

### Features:

- 700TVL horizontal resolution
- 0.1Lux @(F1.2, AGC ON), 0 Lux with IR
- Day/Night auto switch
- Auto white balance, Backlight Compensation
- High Signal Noise Ratio
- Auto electronic shutter for variable environment
- Auto electronic gain
- Built-in microphone
- Dual glasses
- High reliability
- Universal adjustment
- Anti-vibration design, aviation plug output
- Ingress Protection : IP65

### Application Scenario:

Suitable for out vehicle monitoring.


### Order Model:

AE-VC021P-IRS(2.8mm)

AE-VC021P-IRS(3.6mm)

AE-VC021P-IRS(6mm)

### Dimension:

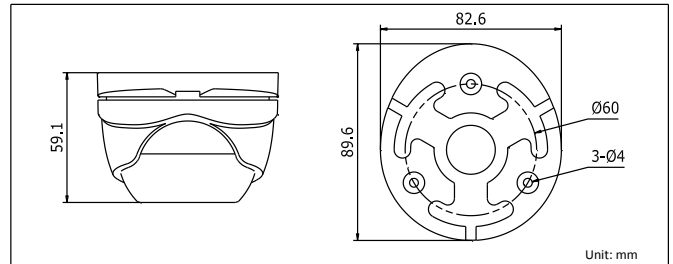

### Parameters:

Model	AE-VC021P-IRS
Parameters	700TVL 1/3" DIS Mobile IR Camera
<b>Camera</b>	
Image Sensor	1/3" DIS
Signal System	PAL
Effective Pixels	976(H)×496(V)
Min. Illumination	0.1Lux @(F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/50sec~1/15,000sec
Lens	6mm(optional 3.6mm, 2.8mm)
Lens Mount	M12
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~ 75°; Rotation: 0°~360°
Day & Night	Electronic
Horizontal Resolution	700TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/Aviation plug)
Audio Input	Built-in microphone
White Balance	Auto
BLC	Support
SNR	More than 62dB
<b>General</b>	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3W
IR Range	10m
Ingress Protection	IP65(Indoor use)
Dimensions(mm)	89.6×59.1
Weight	400g