

<b>Title:</b>	How to configure the advertisement picture for MinMoe terminal. (latest firmware version)	<b>Version:</b>	v1.0	<b>Date:</b>	28/01/2021
<b>Product:</b>	Access Control	<b>Page:</b>	1 of 3	<b>HIKVISION</b>	

---

## How to configure the advertisement picture for MinMoe terminal. (latest firmware version)

---

(2021-01-28)


### Preparation

---

This document displays guidance on how to configure the required advertisement picture for MinMoe access control terminal in the web of this device with its IP.


#### 1. Configure the required advertisement in the web of the device

- 1) Open the web of device with its IP
- 2) Log in to the web of this device

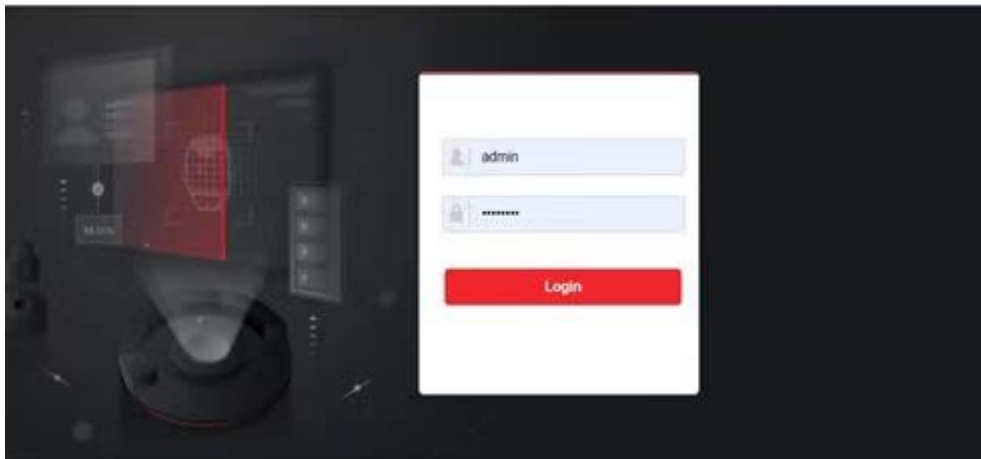

- 3) Upload the required advertisement ( Notice publication → Configuration → Upload)

<b>Title:</b>	How to configure the advertisement picture for MinMoe terminal. (latest firmware version)	<b>Version:</b>	v1.0	<b>Date:</b>	28/01/2021
<b>Product:</b>	Access Control	<b>Page:</b>	2 of 3	<b>HIKVISION</b>	

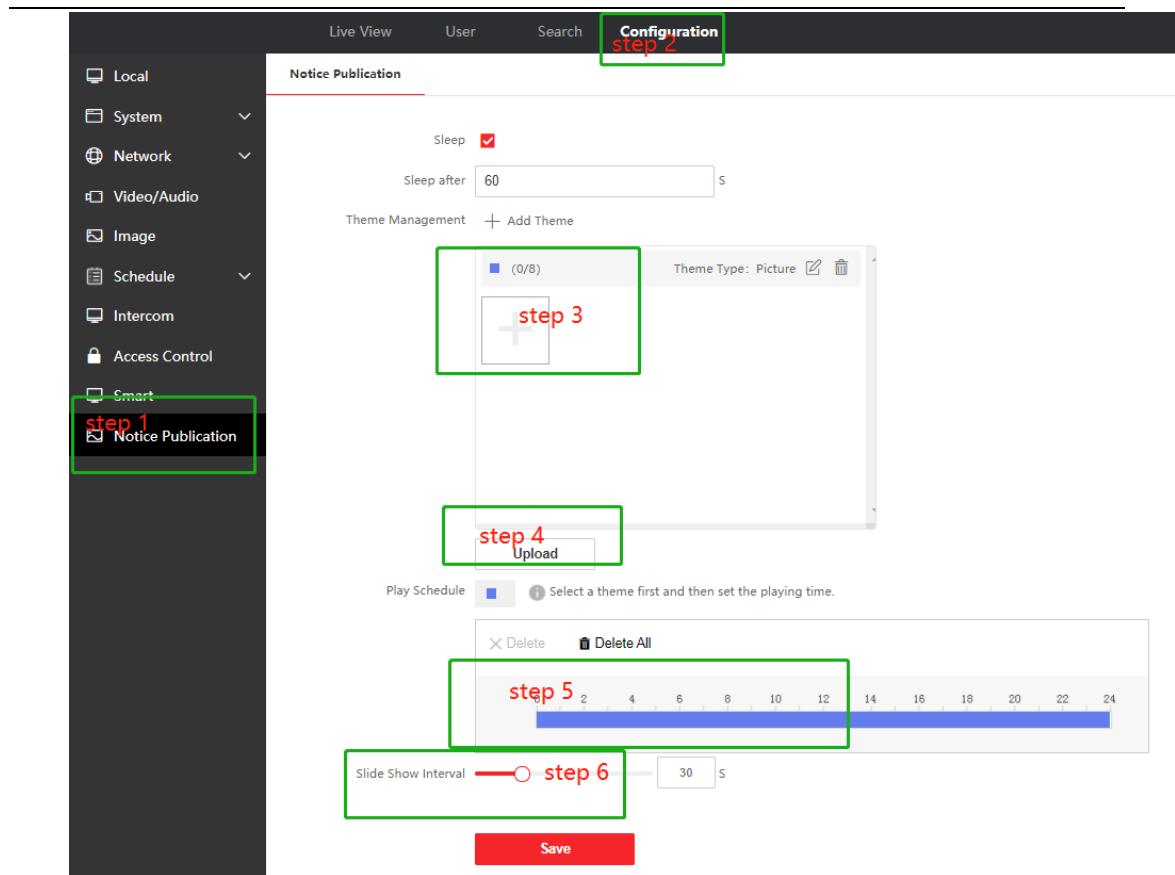

Step 1: Click Notice Publication

Step 2: Click Configuration

Step 3: Click the plus button and choose the required advertisement pictures.

Step 4: Click upload button.

Step 5: Set the playing time of the advertisement.

Step 6: Set the slide Show Interval

#### Notice:

- 1) Only a single client configuration of advertisement pictures in the web is supported and multiple client operations may cause the problem that advertisement pictures cannot be deleted.
- 2) The advertising image resolution should meet the requirements of min = 32 \* 32 and max = 3072 \* 3072

<b>Title:</b>	How to configure the advertisement picture for MinMoe terminal. (latest firmware version)	<b>Version:</b>	v1.0	<b>Date:</b>	28/01/2021
<b>Product:</b>	Access Control	<b>Page:</b>	3 of 3	<b>HIKVISION</b>	

---

**See Far Go Further**

**HIKVISION Technical Support**