

How to unbox and activate E10—DS-2XS2T41G1

Attention:

1. Before installation, please ask the customer to place a power adapter.
2. The equipment battery is not fully charged due to air transportation and other reasons. For the first use after unpacking, it is necessary to charge the equipment to the full power state with the power adapter, and then conduct the distribution network.

1. Power adapter

Customers need to place separate orders according to the standards of their own country, using a 12V round head power adapter.

2. Unpacking operation instruction

(1) Take out device:



(2) Fully charge the battery:

Open the body setting cover, turn the switch from OFF to ON. The adapter for 1A can be fully charged in about 6 hours, and the adapter for 2A can be fully charged in about 3 hours



After fully charging, unplug the external power cord and connect it back to the original solar panel wiring.



3. Device activation

Activation can be activated by using the network cable or SIM card.

(1) Network cable activation device


Connect the equipment to the network by using the network cable adapter



Scan the QR code on the fuselage with HC




After the camera started, the body indicator light is always red.

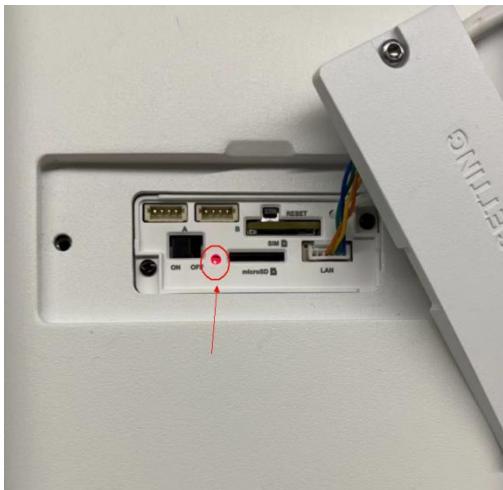

Press and hold the device Reset key until the indicator light flashes blue, and the device will automatically activate and launch EZVIZ cloud. The default activation password for logging in to Hik-Connect is: HikXXXXXX (XXXXXX is the verification code behind the device body, which can be obtained by scanning the QR code from the

device body).

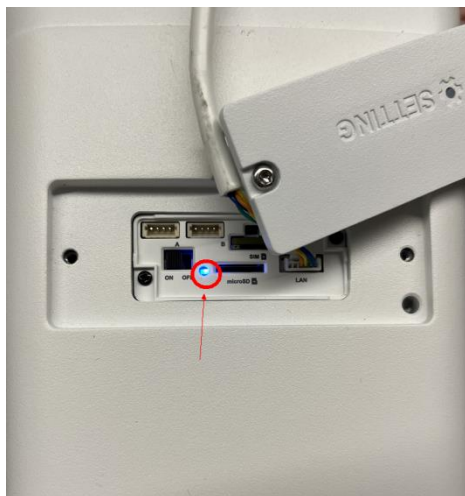

In addition, you can also press and hold the reset button of the device body directly until you hear that the device is activated, use SADP to search for the device IP, assign an IP to the device, and modify the password.

(2) SIM card activation

The SIM card activates the device in the same way as the network cable. The password is HikXXXXXX (XXXXXX is the verification code behind the device body, which can be obtained by scanning the QR code of the device body).

After the SIM card 4G network is successfully connected, the indicator light will change from a fast blue light to a slow blue light.

Note: Do not set a PIN code for the SIM card installed on the camera. If a PIN code is set, please insert the SIM card into the phone or use another device to release the PIN code.