

Temperature Screening MinMoe Terminal

Release Notes (2020-12-29)

Device Model: DS-K1T671TM-3XF DS-K1TA70MI-T DS-K5671-3XF DS-K5604A-3XF	Firmware Version	ARM: ACS_671_3XF_AI3_EN_GM_V2.2.6_build201224 Thermal Module: digicap_thermo-en-gm_V5.5.4_build201107
	SDK	HCNetSDKV6.1.4.151_build20200601_win32_ZH HCISUPSDKV2.3.5.152_build20200518_Win32_ZH
	iVMS-4200 Version	Latest baseline

Reason of Upgrade


Add new features, fix bugs, enhance products quality and meet customers' requirements.

New Feature

1. Support dual backup to avoid upgrade and bricking
2. Add turning on the infrared light step when booting, and improve the user experience

Modified Features

1. The normal temperature range is changed from 35~44.9 degrees Celsius to **30~44.9** degrees Celsius

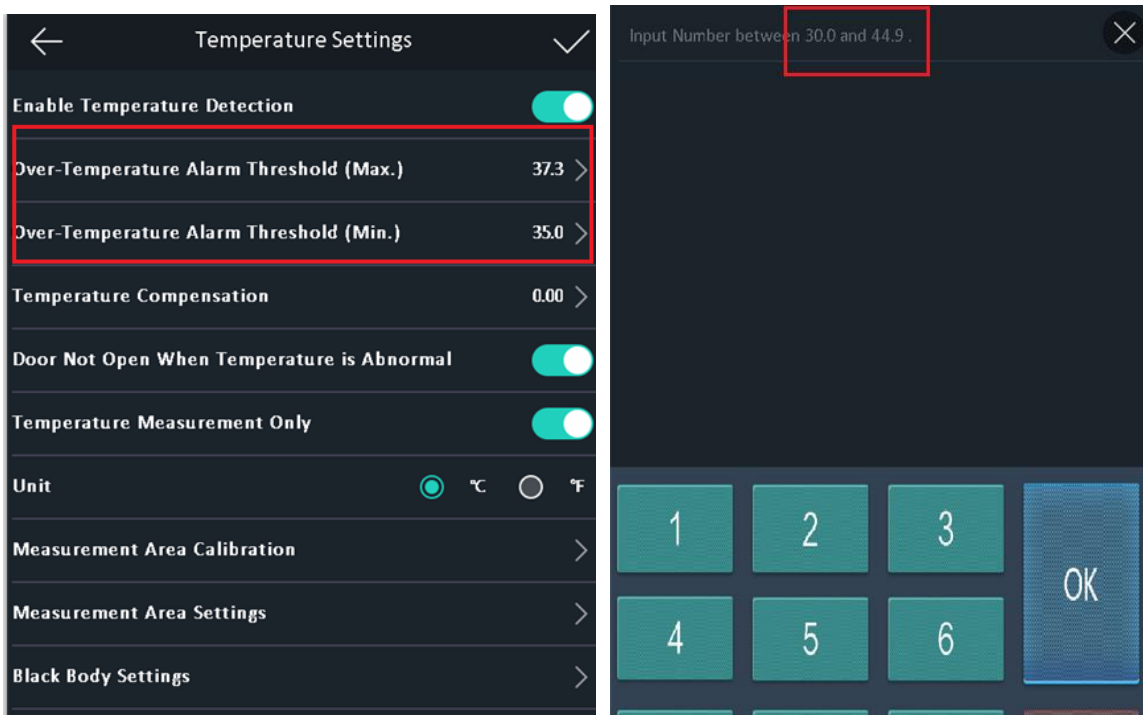

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support team.

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.

Hikvision Digital Technology CO., Ltd.
No. 555 Qianmo Road, Binjiang District, Hangzhou 310052,
China
Tel: +86-571-8807-5998
FAX: +86-571-8993-5635
Email: support@hikvision.com