




Installation and Configuration Guide for Dual-lens  
6825 People Counting Camera

## Content

Installation and Configuration Guide for Dual-lens People Counting Camera .....	1
Chapter 1. Brief introduction .....	3
Chapter 2. Installation specification .....	4
2.1 Focal length and counting width .....	4
2.2 Accessories .....	7
2.3 Installation steps .....	7
2.4 Counting configuration.....	12
Configuration for single camera .....	12
Configuration for multiple cameras.....	16
Parameter description.....	16
Chapter 3. Application scenario .....	20

## Chapter 1. Brief introduction

DS-2CD6825G0/C-I(V)(S), dual-lens camera, based on the binocular stereo vision technology, adopting 3D head detection and 3D tracking, can obtain accurate real-time trajectory of all moving objects within the monitoring scope, analyze the trajectory data and achieve high-precision people counting. It is very suitable for places where people counting is needed, such as shopping mall, supermarket, chain store, the scenic spot, subway station, bus station, exhibition hall, etc. Meanwhile together with iVMS-4200, platform or server, solutions with comprehensive data analysis and query system can also be established.

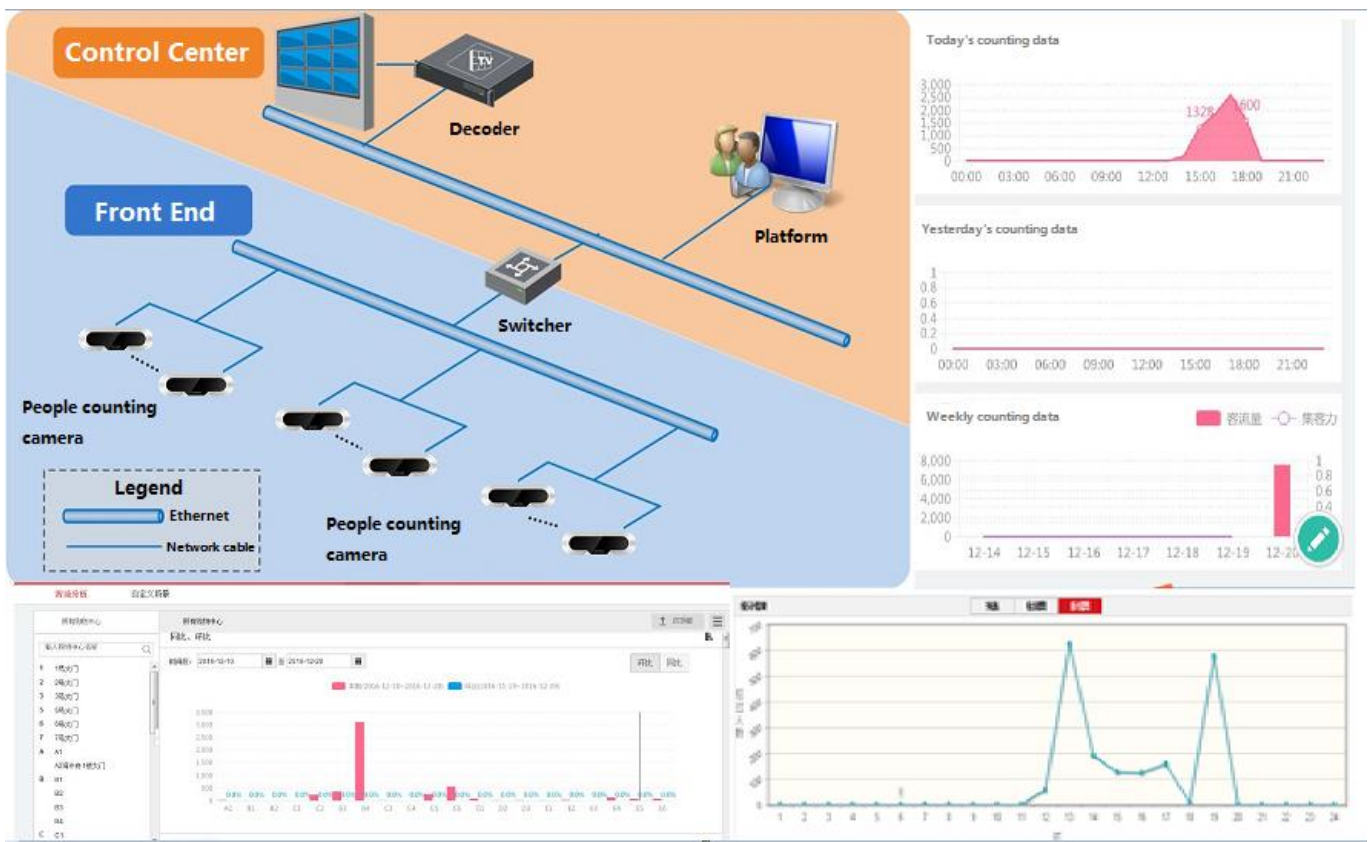

## Chapter 2. Installation specification

### 2.1 Focal length and counting width

The counting width depends on the installation height. The recommended installation height for dual-lens camera is less than 6.0m (19.7ft). The specific corresponding relation shown below:

Focal length (mm/ft)	Installation height (m/ft)	Max. counting width (m/ft)	Max. counting depth (m/ft)
2/0.066	2.1/6.9	1.02/3.3	0.58/1.9
	2.2/7.3	1.28/4.2	0.72/2.4
	2.3/7.5	1.54/5.1	0.86/2.8
	2.4/7.9	1.79/5.9	1.01/3.3
	2.5/8.2	2.05/6.7	1.15/3.8
	2.6/8.5	2.3/7.5	1.3/4.3
	2.7/8.9	2.56/8.4	1.44/4.7
	2.8/9.2	2.82/9.3	1.58/5.2
	2.9/9.5	3.07/10.1	1.73/5.7
	3.0/9.8	3.33/10.9	1.87/6.1
	3.1/10.2	3.58/11.7	2.02/6.6
	3.2/10.5	3.84/12.6	2.16/7.1
	3.3/10.8	4.1/13.5	2.3/7.5
	3.4/11.2	4.35/14.3	2.45/8
	3.5/11.5	4.61/15.1	2.59/8.5
3.6/11.8	4.86/15.9	2.74/9	


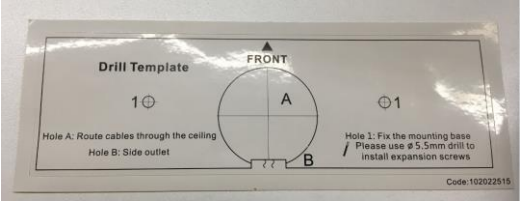




Focal length (mm/ft)	Installation height (m/ft)	Max. counting width (m/ft)	Max. counting depth (m/ft)
	3.7/12.1	5.12/16.8	2.88/9.4
	3.8/12.5	5.38/17.7	3.02/9.9
	3.9/12.8	5.63/18.5	3.17/10.4
	4.0/13	5.89/19.3	3.31/10.9
	4.1/13.5	6.14/20.1	3.46/11.4
	4.2/13.8	6.4/21	3.6/11.8
	4.3/14.1	6.66/21.9	3.74/12.3
	4.4/14.4	6.91/22.7	3.89/12.8
	4.5/14.8	7.17/23.5	4.03/13.2
	4.6/15.1	5.5/18	3.08/10.1
	4.7/15.4	5.69/18.7	3.19/10.5
	4.8/15.7	5.88/19.3	3.3/10.8
	4.9/16.1	6.07/19.9	3.4/11.2
	5.0/16.4	6.26/20.5	3.51/11.2
	5.1/16.7	6.45/21.2	3.62/11.9
	5.2/17.1	6.64/21.8	3.72/12.2
	5.3/17.4	6.83/22.4	3.83/12.6
	5.4/17.7	7.02/23	3.93/12.9
	5.5/18	7.21/23.7	4.04/13.3
	5.6/11.5	7.4/24.3	4.15/13.6
	5.7/18.7	7.59/24.9	4.25/13.9




Focal length (mm/ft)	Installation height (m/ft)	Max. counting width (m/ft)	Max. counting depth (m/ft)
	5.8/19	7.78/25.5	4.36/14.3
	5.9/19.4	7.97/26.1	4.47/14.7
	6/19.7	8.16/26.8	4.57/15

## 2.2 Accessories


 A white, rectangular dual-lens camera with two lenses on the front and a microphone grille on top.	Dual-lens Camera
 A white paper drill template with a central circle divided into four quadrants. The top quadrant is labeled 'A', the bottom 'B', and the left and right '1'. Text includes 'Drill Template', 'FRONT', 'Hole A: Route cables through the ceiling', 'Hole B: Side outlet', and 'Hole 1: Fix the mounting base. Please use ø 5.5mm drill to install expansion screws'. A code '102022515' is at the bottom right.	Drill Template
 A clear plastic bag containing several screws and a green packet of screws. A QR code and a small label are on the bag.	Screws
 A white paper quick guide with a blue and white CD/DVD disc on top. The text 'Dual-Lens People Count' is visible on the paper.	Quick guide

## 2.3 Installation steps


Please pay great attention to the mounting position. Inappropriate mounting position may cause loss of accuracy. The recommended mounting position is shown below:

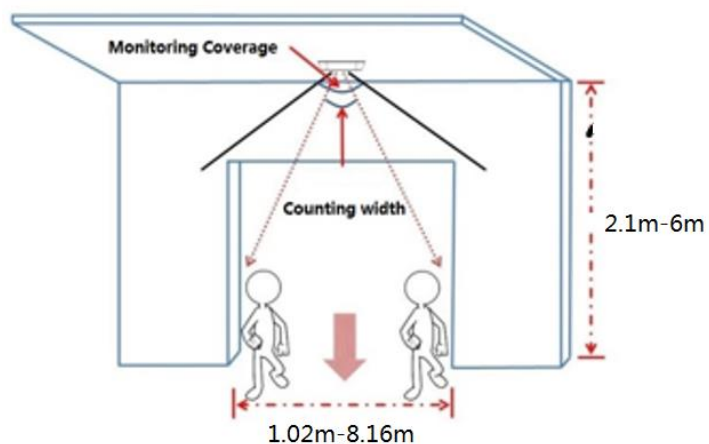

Horizontal sketch map of mounting position

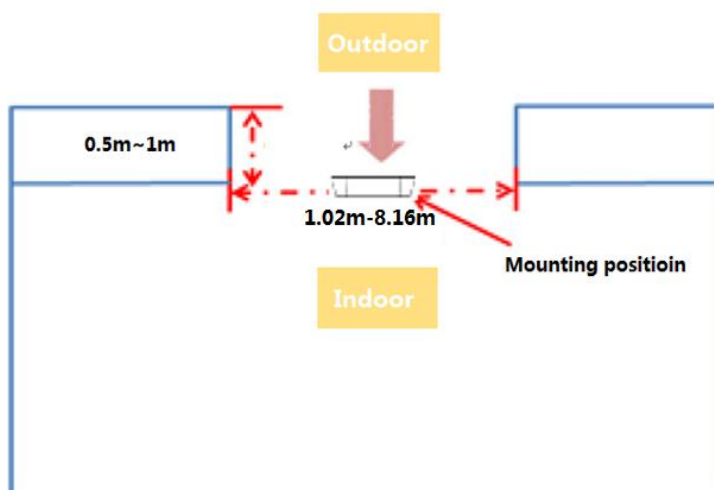

Vertical sketch map of mounting position

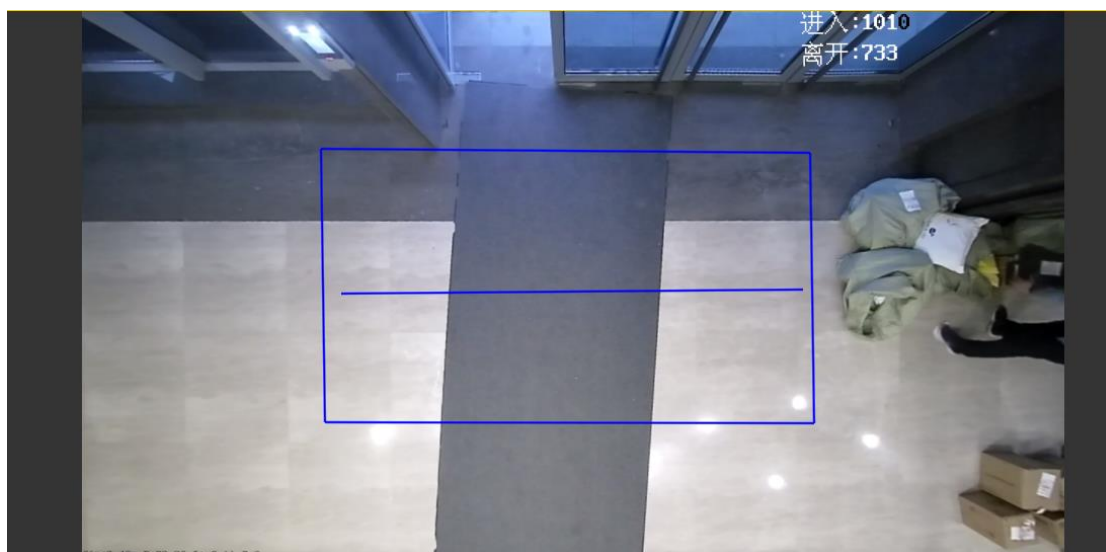

Effect picture after installation





- Keep “HIKVISION” logo in the same direction as the “Front” arrow, see picture below:



“Front” arrow and “HIKVISION” logo

- Make sure camera mounted vertically above the passenger flow(90°vertical by the ground), see picture below:




Passenger flow (perpendicular to the door)

- For some scenarios where there are multiple cameras, mount the cameras according to two rules.

Rule one: If there are turnstiles, each camera should be mounted to monitor certain turnstile



Rule two: If there is no turnstile, at first, mount the cameras in one line, and make sure the cameras have the same focal length. Then, keep a proper distance between each camera according to the overlap (see the yellow area below) of the adjacent two cameras' counting width. The suggested overlapping length is between 0.2-0.5m.

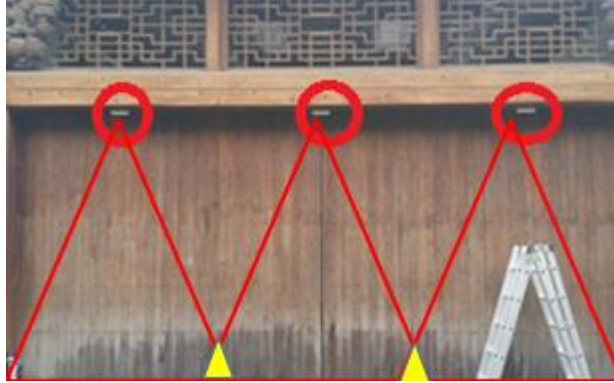

Sketch map of multiple cameras installation

## Notice

- 1) People flow should be in vertical up-and-down direction



Passenger flow in horizontal direction (wrong)




Passenger flow in slant direction (wrong)




Passenger flow in vertical up-and-down direction (right)


- 2) Passageway width should be within camera's counting width

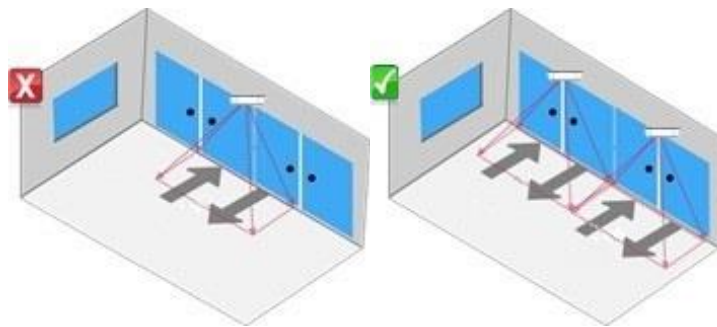


- 3) Avoid obstacles such glass door, shield door and turnstile that block the camera. For Each divided passageway, mount one camera right above

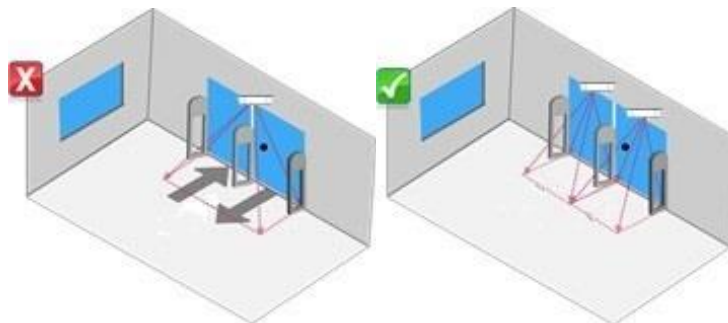

- 4) The camera should be mounted as close as possible to the passageway without obstacle. Remove the obstacle or adjust the camera mounting position if there is obstacle below the camera. Meanwhile, to prevent miscounting, if there's sliding door onsite, make sure the trajectory of sliding door not overlap the detection line. Otherwise, the counting number may be misled by the door opening and closing

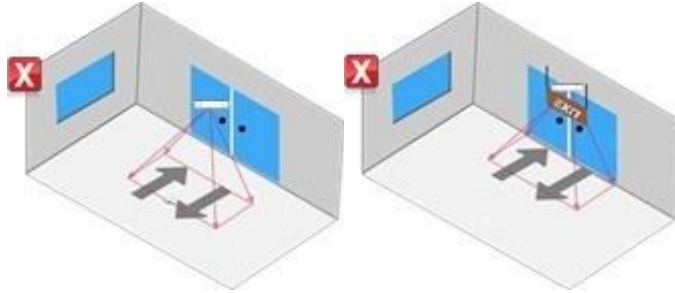

Too far away from the door/Obstacle below camera

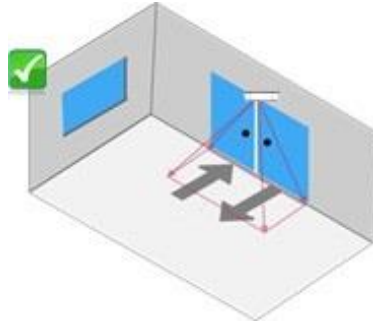


Recommended installation

## 2.4 Counting configuration


### Configuration for single camera

Step 1. Select VCA Resource. It is necessary to select the VCA source as People Counting Mode.

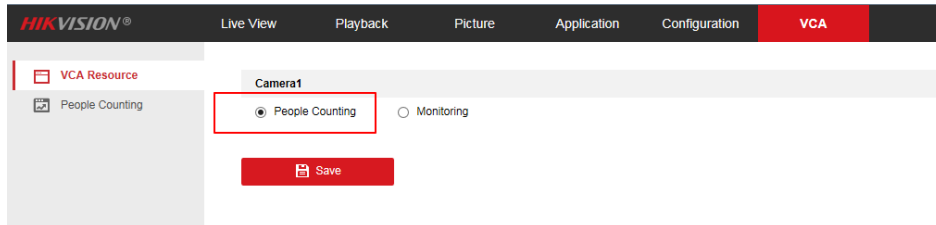

Step 2. Rule Configuration:


1) Enter **【VCA】 - 【People Counting】** , check “Enable People Counting”。

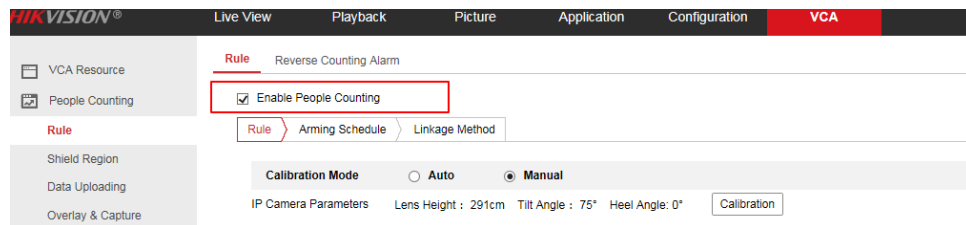


2) Select the calibration mode: Manual and Auto are selectable.

**Manual Calibration Mode:** Input the Lens height (the height from Entry/Exit area to the camera), Tilt Angle and Heel Angle manually, then click “Calibrate”, A red detection area will automatically

appear in the image. The red area is for counting. To increase the success rate of the manual calibration, make sure the lens height is the true value in vertical direction between the lens and the ground.

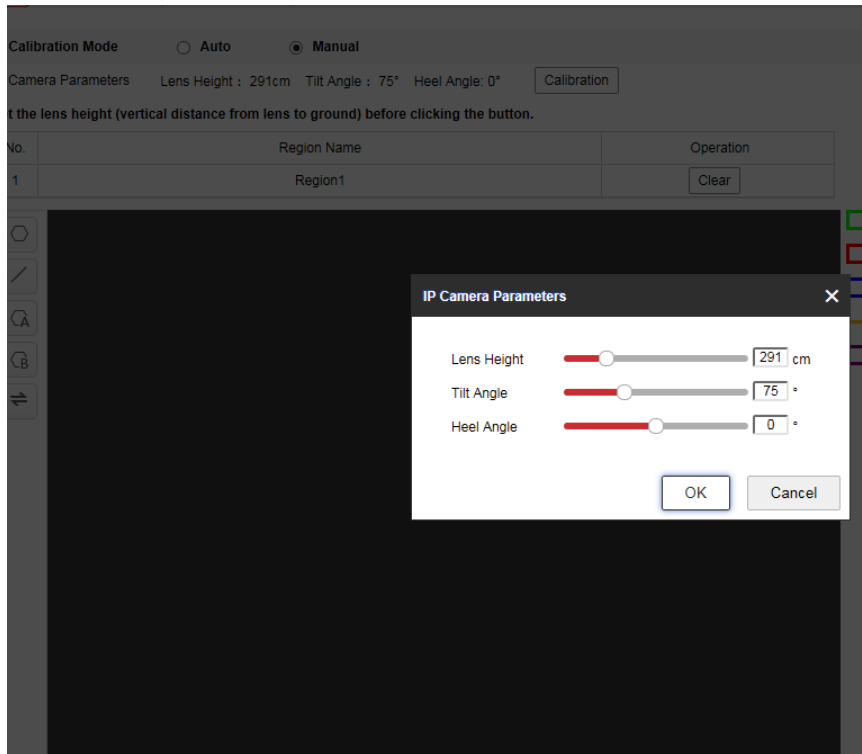


**Auto Calibration Mode:** It will generate the lens height and a green calibration area automatically. The calibration area is used for calibrating the height from the ground to lens. So we strongly recommend to select the totally ground part as calibration area.

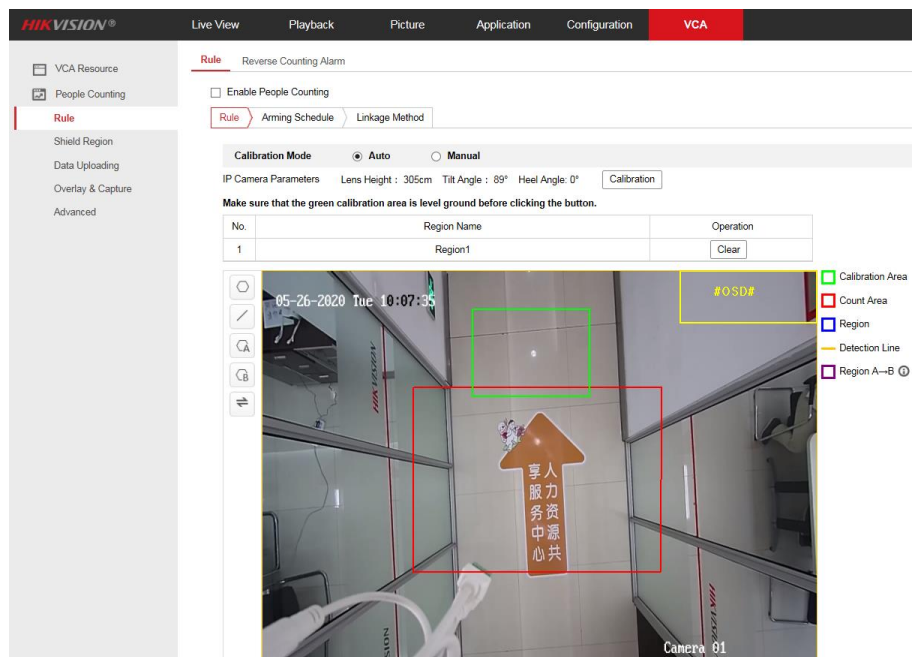

**Notice:** If auto calibration fails, switch to [Manual] and input the measured “Height”, then click [Calibration].


Step 3. Draw the region (shown as the blue frame in the below picture)

**NOTE:** The rule frame should be within red counting frame.

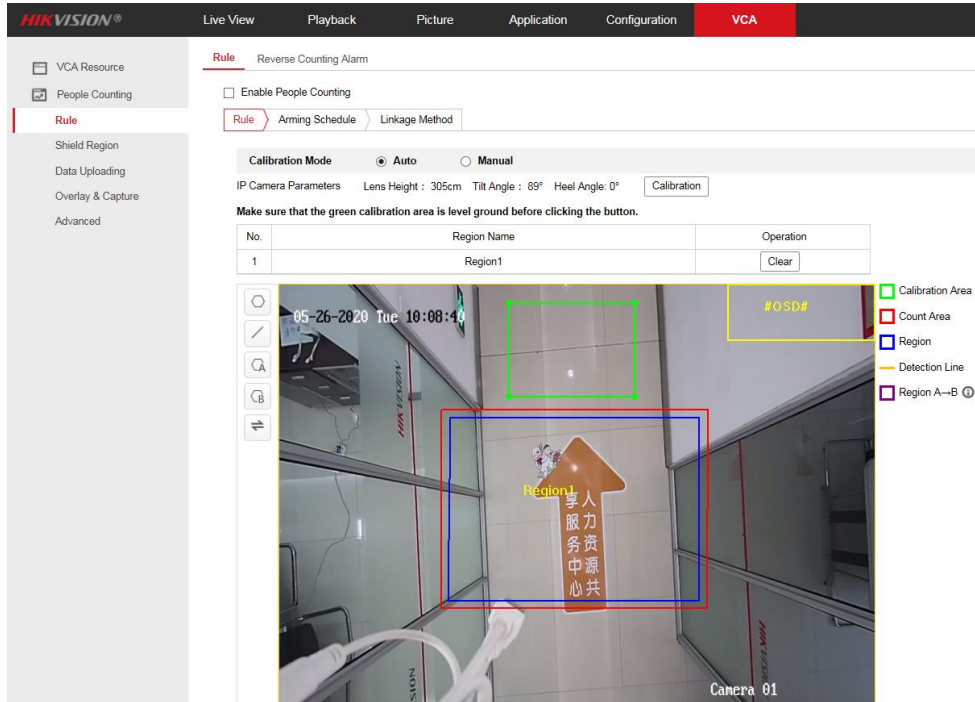

Step 4. Draw detection line (the yellow line as shown in the below picture) or detection region.

**Detection Line:** the yellow line should be within the blue detection region.

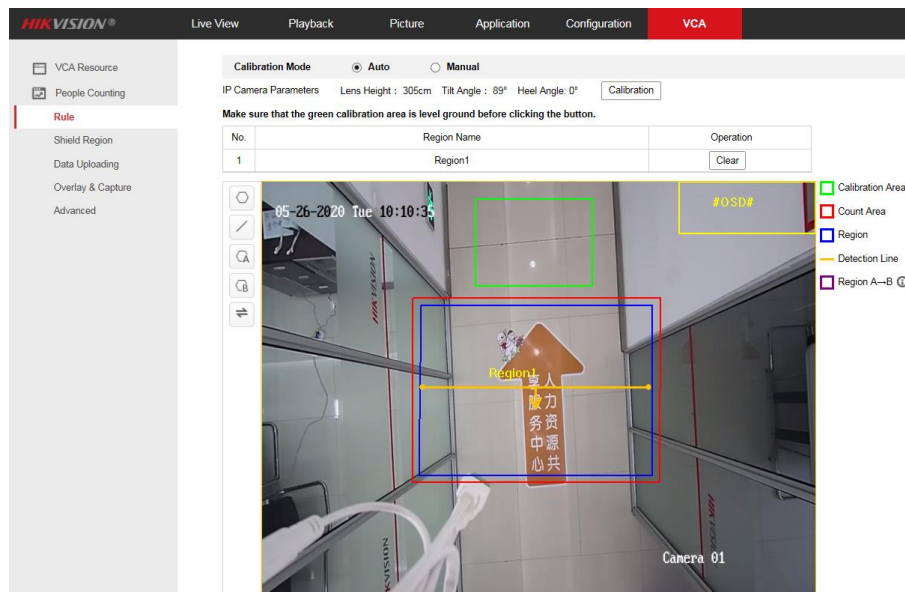

**Detection Region:** Draw A and B region. Make sure the two areas don't overlap. If the target enters from A region to B region, then it is counted as the entering number; If the target enters from B region to A region, then it is counted as the exiting number.

The screenshot shows the HIKVISION VCA configuration interface. The top navigation bar includes 'Live View', 'Playback', 'Picture', 'Application', 'Configuration', and 'VCA'. The left sidebar contains 'VCA Resource', 'People Counting', and 'Rule' (with sub-items: Shield Region, Data Uploading, Overlay & Capture, Advanced). The main area shows 'Calibration Mode' set to 'Auto' and 'IP Camera Parameters' (Lens Height: 305cm, Tilt Angle: 89°, Heel Angle: 0°). A table lists the regions:

No.	Region Name	Operation
1	Region1	Clear

Below the table is a live camera feed of a hallway with a sign that says 'Regions 人力资源部' (Human Resources Department). The feed shows a green calibration area, a red count area, a blue region, a yellow detection line, and a purple region A-B. A legend on the right identifies these elements. The timestamp '05-26-2020 Tue 10:13:53' and 'Camera 01' are visible on the feed.

Step 5. Save it after finishing the configuration. Set the Arming schedule and linkage method.

The screenshot shows the 'Linkage Method' configuration page. The top navigation bar includes 'Rule', 'Arming Schedule', and 'Linkage Method'. Below the navigation bar are 'Delete' and 'Delete All' buttons. The main area displays a 7-day arming schedule grid:


Day	0	2	4	6	8	10	12	14	16	18	20	22	24
Mon	[Armed]												
Tue	[Armed]												
Wed	[Armed]												
Thu	[Armed]												
Fri	[Armed]												
Sat	[Armed]												
Sun	[Armed]												

Below the grid, the 'Linkage Method' section is visible, with 'Normal Linkage' and 'Notify Surveillance Center' both checked and highlighted with a red box.

## Configuration for multiple cameras

Step 1. Do configuration for each camera following the steps above

Step 2. Move each camera's detection line and connect the ends of adjacent lines. Some objects could be placed on the image border for reference. See picture below:

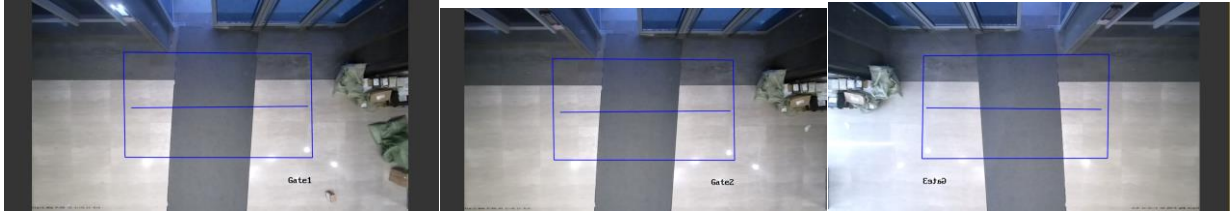

Configuration of each detection line

## Parameter description


### Reverse Counting Alarm:

Set reverse counting alarm (optional). Check Enable Reverse Entering Alarm to enable the function. An alarm is enabled when the target leaves the region. Set the arming schedule and linkage method.




## Shield Region:

If you don't want to count people of the specific area, you can draw the area as shield region.

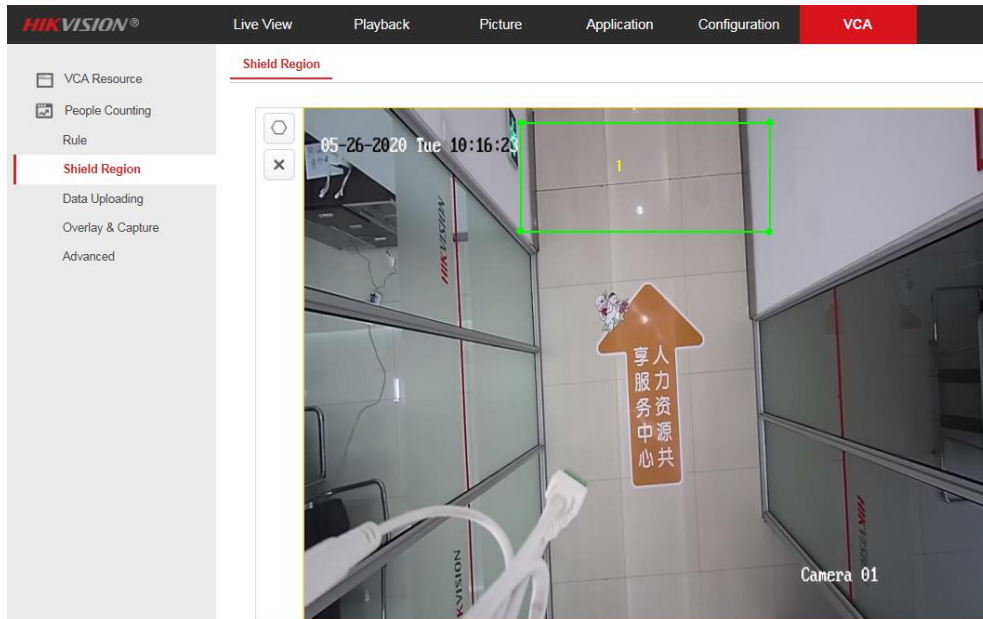


## Data Uploading:

- 1) Enter **【VCA】 - 【People Counting】 - 【Data Uploading】**
- 2) If you want to upload the real-time data to the platform, select real-time Upload Data as "ON".
- 3) If you want to adjust the statistic cycle manually, set data statistics data as required. 1/5/10/15/20/30/60 minutes are optional.
- 4) We can send the report via email, the data type includes Daily/Weekly/Monthly/Annual report. The report format includes excel/csv/txt/xml.

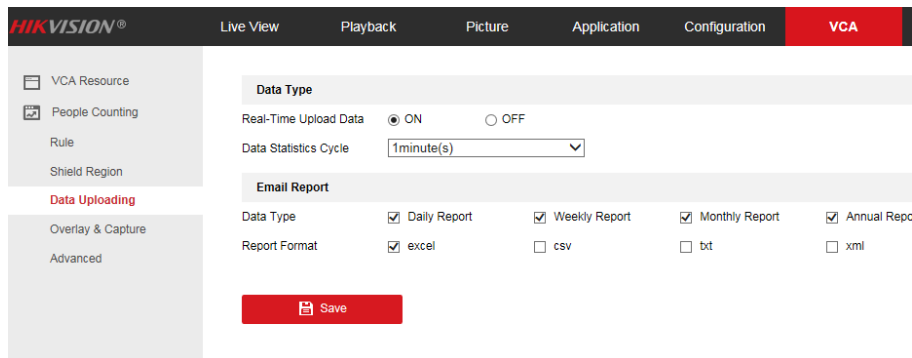


## Overlay & Capture:



- 1) **OSD Overlay:** It supports display the real-time counting information in the live view image. Enter, Leave, Enter/Leave and None are optional.
- 2) **Counting Type:** Adult, Child and All are optional.

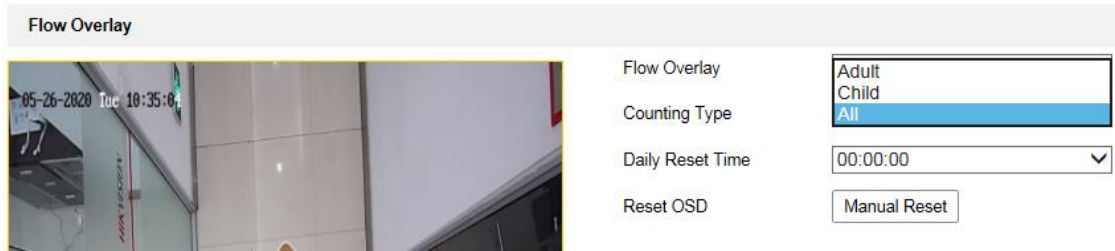

- 3) **Daily Reset Time/Rest OSD:** To reset the counter, you can set up a daily reset time. Or you can reset the OSD counter manually by click Manual Reset.

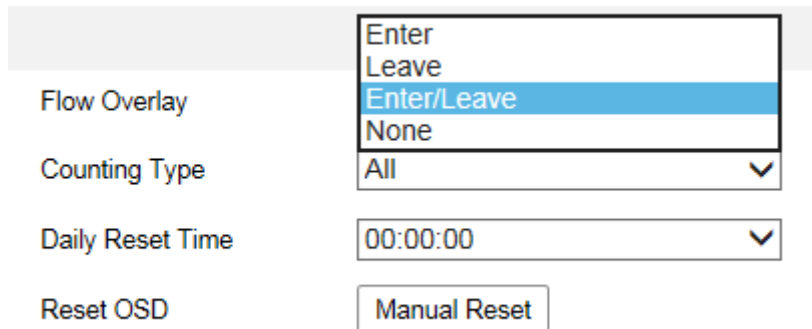

- 4) **Display VCA Info. on Stream:** It will display the ID number and height information of tracking people on stream after enabling it. The recording file will overlay these information and it can be checked via VS Player. It should enable the function of Display POS Information in the below path: **【configuration】 - 【Local】** if we want to see these information in the live view image.

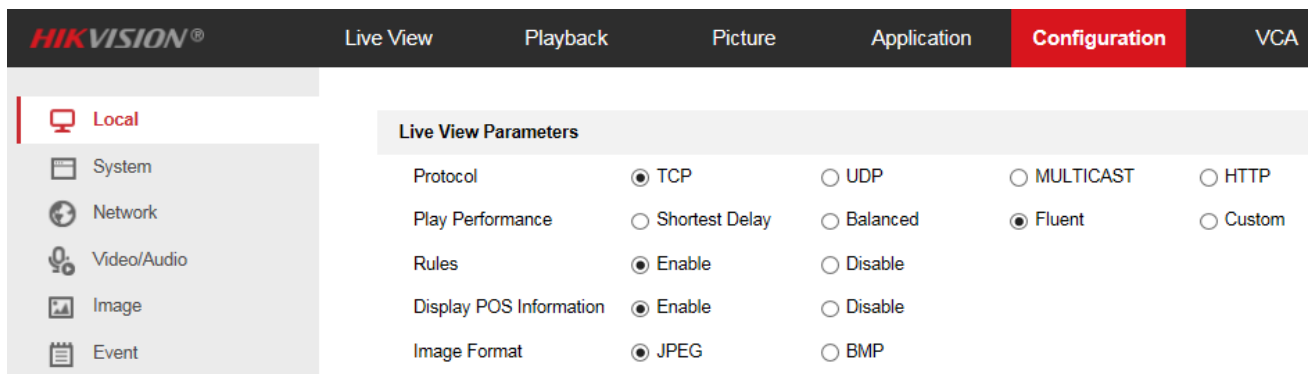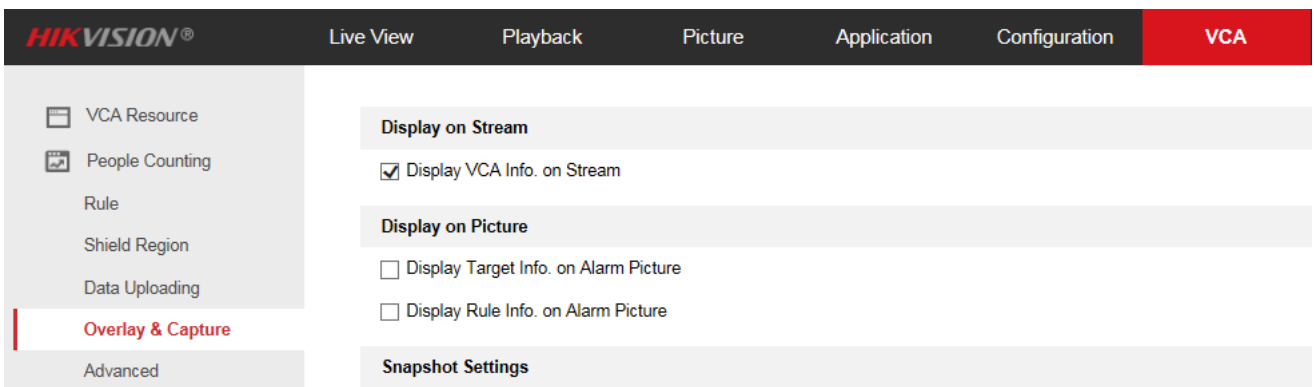

## Advanced Parameter:

- 1) **Height Filter:** Enable the function and set a height value. Persons and objects shorter than the set value are not counted as a valid target. Also this camera support counting Children.

Enable Height Filter

Height  120 cm

Enable Counting Children

Height  140 cm

- 2) **Target Detection Type/Algorithm Validity:**

There are four type of target detection: Detect based on the tracking algorithm only; Depth map only; Tracking algorithm mainly and depth map secondarily; and depth map mainly and tracking algorithm secondarily. It is recommended to use default type.


**Algorithm Validity:** The bigger the numerical value, the stricter the object detection requirements are. It is recommended to use default values.

Target Detection Type  

Algorithm Validity  50

- 3) **Pattern Counting Filtering:** Targets less than the set value of motion displacement and residence time are not counted. It is recommended to use default values.

Enable Pattern Counting Filtering

Motion Displacement  35 cm

Dwell Time  s

- 4) **Counting Status:** It displays the current status of the camera. There are three types optional: Counting, Stopped, Pause counting. You can click Refresh button to refresh the status.

**Counting:** Count normally.


**Stopped:** Disable people counting function.

**Pause counting:** The scene is too dark.

Counting Status

Clear Storage Data  **Note: This action clears all counting data stored in the camera.**

One-touch Export  **Export the device hardware settings, installation settings, people counting settings, rule settings and advanced settings.**

Maintenance Mode  

- 5) **Clear Storage Data:** To clear stored data on camera, you can click the **Clear** button. Always do the operation with caution. Deleted data cannot be restored.
- 6) **One-touch Export:** Export the device hardware settings, installation settings, people counting settings, rule settings and advanced settings.
- 7) **Maintenance Mode:** If the function is enabled, certain camera settings will be changed, such as the resolution, frame rate and bit rate. When we need collect the video clip for the issue analyse, it is necessary to enable the maintenance mode.

Clear Storage Data	<input type="button" value="Clear"/>
One-touch Export	<input type="button" value="Export"/>
Maintenance Mode	<input type="button" value="OFF"/> ▼

Note: This action clears all counting data stored in the camera.

Export the device hardware settings, installation settings, people counting settings, rule settings and advanced settings.

## Chapter 3. Application scenario

The application scenario and the mounting position are very important to the people counting accuracy. Usually the camera is mounted above the passageway and the door. Below shows the mounting position and configuration for two typical examples:



Mounting position and configuration for supermarket



Mounting position and configuration for subway