



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM190201107201

Page: 1 of 80

TEST REPORT

Application No.: SHEM1902011072AT
Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Applicant: No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Manufacturer: No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Factory: 1, Hangzhou Hikvision Technology Co., Ltd.
2, Hangzhou Hikvision Electronics Co., Ltd.
3, Chongqing Hikvision technology Co., LTD.
Address of Factory: 1, No. 700, Dongliu Road, Binjiang District, Hangzhou City, Zhejiang, 310052, China
2, No. 299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou, Zhejiang, 310052, China.
3, No. 118, Haikang Road, Area C, Jianqiao Industrial Park, Dadukou District, Chongqing, 401325, China
Equipment Under Test (EUT):
EUT Name: NETWORK CAMERA
Model No.: Refer to Page 2
Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade mark: HIKVISION
Standard(s) : EN 55032:2015, EN 50130-4:2011 +A1:2014
EN 61000-3-2:2014, EN 61000-3-3:2013
Date of Receipt: 2019-02-16
Date of Test: 2019-02-16 to 2019-02-26
Date of Issue: 2019-03-08

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Parlan Zhan

Parlan Zhan
E&E Section Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. NO.588 West Jindu Road, Songjiang District, Shanghai, China 201612 t(86-21) 61915666 f(86-21) 61915678 www.sgs.com.cn
中国·上海·松江区金都西路588号 邮编: 201612 t(86-21) 61915666 f(86-21) 61915678 e sgs.china@sgs.com



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM190201107201
Page: 2 of 80

Model No.:


DS-2CD2185G0-IMS, DS-2CD2125G0-IMS, DS-2CD3125G0-IMS, DS-2CD3185G0-IMS,
DS-2CD2125G0-IMSUHK, DS-2CD2125G0-IMSCCKV, DS-2CD2125G0-IMSUVS,
DS-2CD2125G0-IMSKVO, DS-2CD2125G0-IMSHUN, DS-2CD2185G0-IMSUHK,
DS-2CD2185G0-IMSCCKV, DS-2CD2185G0-IMSUVS, DS-2CD2185G0-IMSKVO,
DS-2CD2185G0-IMSHUN, DS-2CD3125G0-IMSUHK, DS-2CD3125G0-IMSCCKV,
DS-2CD3125G0-IMSUVS, DS-2CD3125G0-IMSKVO, DS-2CD3125G0-IMSHUN,
DS-2CD3185G0-IMSUHK, DS-2CD3185G0-IMSCCKV, DS-2CD3185G0-IMSUVS,
DS-2CD3185G0-IMSKVO, DS-2CD3185G0-IMSHUN



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM190201107201
Page: 3 of 80

Revision Record			
Version	Description	Date	Remark
00	Original	2019-03-08	/

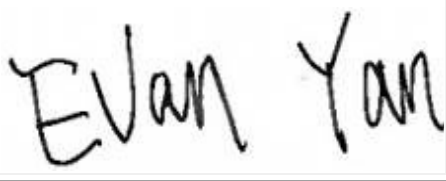Authorized for issue by:			
			
		Evan Yan /Project Engineer	
			
		Bruce Tang /Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Asymmetric Mode Conducted Emissions (150kHz-30MHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Radiated Emissions (30MHz-1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Radiated Emissions (above 1GHz)	EN 55032:2015	EN 55032:2015	Class B	Pass
Harmonic Current Emission	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	N/A*
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	Pass
Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 50130-4:2011 +A1:2014	EN 61000-4-2:2009	6kV Contact Discharge 2,4,8kV Air Discharge	Pass
Electrical Fast Transients/Burst at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	2kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Electrical Fast Transients/Burst at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 100kHz Repetition Frequency	Pass
Surge at Power Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td 0.5,1kV Line to Line 0.5,1,2kV Line to Ground	Pass
Surge at Signal Port	EN 50130-4:2011 +A1:2014	EN 61000-4-5:2014	1.2/50µs Tr/Td 0.5,1kV Line to Ground	Pass
Voltage Dips and Interruptions	EN 50130-4:2011 +A1:2014	EN 61000-4-11:2004	80 % UT for 250per 70 % UT for 25per 40 % UT for 10per 0 % UT for 250per UT is Supply Voltage	Pass
Mains Supply Voltage Variations-Conditioning	EN 50130-4:2011 +A1:2014	EN 50130-4:2011+A1:2014	Unom+10% Unom-15%	Pass
Radiated Immunity(80MHz-2.7GHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-3:2006 +A1:2008+A2:2010	10V/m, 80%, 1kHz sinusoidal Amp. Mod.	Pass
Conducted Immunity at Power Port (150kHz-100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf),80%,1kHz sinusoidal Amp. Mod.	Pass



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM190201107201

Page: 5 of 80

Conducted Immunity at Signal Port (150kHz- 100MHz)	EN 50130-4:2011 +A1:2014	EN 61000-4-6:2014	10Vrms (emf), 80%, 1kHz sinusoidal Amp. Mod.	Pass
--	-----------------------------	-------------------	--	------

N/A*: Please refer to Section 6.5 of this report for details.

InternalSource	UpperFrequency
Below 108MHz	1GHz
108MHz to 500MHz	2GHz
500MHz to 1GHz	5GHz
Above 1GHz	5 times the highest frequency or 6 GHz, whichever is less

Note1: Declaration of EUT Family Grouping:

There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model DS-2CD2185G0-IMS was tested since their differences are model number.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	4
3 CONTENTS	6
4 GENERAL INFORMATION.....	8
4.1 DETAILS OF E.U.T.	8
4.2 DESCRIPTION OF SUPPORT UNITS	8
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION	9
4.5 TEST FACILITY	9
4.6 DEVIATION FROM STANDARDS.....	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST.....	9
5 EQUIPMENT LIST	10
6 EMISSION TEST RESULTS.....	12
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	12
6.2 ASYMMETRIC MODE CONDUCTED EMISSIONS (150kHz-30MHz)	17
6.3 RADIATED EMISSIONS (30MHz-1GHz)	22
6.4 RADIATED EMISSIONS (ABOVE 1GHz)	29
6.5 HARMONIC CURRENT EMISSION	36
6.6 VOLTAGE FLUCTUATIONS AND FLICKER.....	37
7 IMMUNITY TEST RESULTS.....	38
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 50130-4:2011 +A1:2014	38
7.2 ELECTROSTATIC DISCHARGE	39
7.3 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	40
7.4 ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT	41
7.5 SURGE AT POWER PORT.....	42
7.6 SURGE AT SIGNAL PORT	44
7.7 VOLTAGE DIPS AND INTERRUPTIONS.....	45
7.8 MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING	46
7.9 RADIATED IMMUNITY(80MHz-2.7GHz)	47
7.10 CONDUCTED IMMUNITY AT POWER PORT (150kHz-100MHz)	48
7.11 CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-100MHz)	49
8 PHOTOGRAPHS	50
8.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP	50
8.2 ASYMMETRIC MODE CONDUCTED EMISSIONS (150kHz-30MHz) TEST SETUP.....	52
8.3 RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	54
8.4 RADIATED EMISSIONS (ABOVE 1GHz) TEST SETUP	56
8.5 VOLTAGE FLUCTUATIONS AND FLICKER TEST SETUP.....	58
8.6 ELECTROSTATIC DISCHARGE TEST SETUP	59
8.7 RADIATED IMMUNITY (80MHz-2.7GHz) TEST SETUP	60
8.8 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT TEST SETUP.....	62
8.9 ELECTRICAL FAST TRANSIENTS/BURST AT SIGNAL PORT TEST SETUP	63
8.10 SURGE AT POWER PORT TEST SETUP	66
8.11 SURGE AT SIGNAL PORT TEST SETUP	67
8.12 CONDUCTED IMMUNITY AT POWER PORT (150kHz-100MHz) TEST SETUP.....	69
8.13 CONDUCTED IMMUNITY AT SIGNAL PORT (150kHz-100MHz) TEST SETUP	70



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM190201107201
Page: 7 of 80

8.14 VOLTAGE DIPS AND INTERRUPTIONS TEST SETUP73
8.15 MAINS SUPPLY VOLTAGE VARIATIONS-CONDITIONING TEST SETUP.....74
8.16 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)75-80

4 General Information

4.1 Details of E.U.T.

Power supply:	DC12V or PoE
Cables:	Interface: Power*1, Lan*1, Alarm*1

4.2 Description of Support Units

Description	Manufacturer	Model No.
Notebook	HP	HP ProBook 440 G5
Notebook	Lenovo	ThinkPad L440
Power Adapter	MOSO	MSA-C2000IC12.0-24P-CN AC100-240V 50/60Hz 0.7A max, input DC12V 2A output . (external power supply)
POE Injector	SUPLET	LAS60-57CN-RJ45: AC100~240V 50/60Hz 2Amax, DC56V 60W output. (external power supply)
LAN Cable	Hikvision	EIA/TIA-568B,2 CAT,5E,2m

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	±2.6dB (9kHz to 150kHz)
		±2.3dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	±1.9 dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	±4.1 dB (150kHz to 30MHz)
4	Radiated Power	±3.0dB
5	Radiated emission	±4.4dB (30MHz-1GHz)
		±4.8dB (1GHz-6GHz)
		±5.2dB (6GHz-18GHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678
sub-contracted

Hangzhou Hikvision Digital Technology Co., Ltd
No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (Certificate No. 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program(NVLAP). Certificate No. 201034-0.

- **FCC –Designation Number: CN5033**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 Monitoring of EUT for All Immunity Test

Visual: work status and video quality

5 Equipment List

Conducted Emissions at Mains Terminals					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
EMI test Receiver	R&S	ESR3	101831	2018/5/15	2019/5/14
Line impedance stabilization network	R&S	ENV216	10107	2018/5/15	2019/5/14
Radiated Emission					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
EMI test Receiver	R&S	ESU26	100499	2018/12/9	2019/12/9
PRE-Amplifier	Connphy	CLN-1G18G-4030-S	517002	2018/8/30	2019/8/30
TRLIOG Broad Band Antenna	Schwarzbeck	VULB 9168	796	2017/7/10	2019/7/10
Horn antenna	Schwarzbeck	BBHA 9120D	7794	2017/8/19	2019/8/19
Voltage Fluctuations and Flicker					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
Harmonic & Flicker analyzer	TESEQ	NSG1007	1438A04118-1	2018/5/15	2019/5/14
AC power source	TESEQ	CCN1000-1	1438A04118-1	2018/5/15	2019/5/14
Electrostatic Discharge					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
Electrostatic Discharge Simulator	TESEQ	NSG 437	1254	2018/7/4	2019/7/3
EFT					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
Immunity Test system	TESEQ	NSG3040	2173	2018/5/15	2019/5/14
Capacitive coupling clamp	TESEQ	CDN 3425	1928	2018/5/15	2019/5/14
Surge					
Immunity Test system	TESEQ	NSG3060	1716	2018/5/15	2019/5/14
Data coupling network	TESEQ	CDN 117M	38777	2018/5/15	2019/5/14
Power coupling network	TESEQ	CDN 3061-S16	1513	2018/5/15	2019/5/14
Immunity Test system	3C test	SG-728G	EC0630906	2018/11/09	2019/11/08
Immunity Test system	3C test	SG-5006G	EC5580932	2018/11/09	2019/11/08
Data coupling network	3C test	SGN-C3	EC5620903	2018/11/09	2019/11/08
Power coupling network	3C test	SGN-5010G	EC5590919	2018/11/09	2019/11/08
Data coupling network	3C test	SGN-C2	EC5620903	2018/11/09	2019/11/08
CS					
Immunity Test system	TESEQ	NSG 4070C-0	47944	2018/4/11	2019/4/10
CDN	TESEQ	CDN M016	50365	2018/4/11	2019/4/10



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM190201107201

Page: 11 of 80

Coupling clamp	TESEQ	KEMZ 801A	50113	2018/4/11	2019/4/10
RS					
Signal generator	keysight	N5181A	MY50146343	2018/11/09	2019/11/08
Power meter	keysight	N1914A	MY55336002	2018/11/09	2019/11/08
Amplifier	milmege	80RF1000-500	1069892	2018/11/09	2019/11/08
Amplifier	milmege	AS0827-230	1069893	2018/12/5	2019/12/04
Antenna	Schwarzbeck	STLP9128E	9128E7#3009	/	/
Antenna	Schwarzbeck	STLP 9149	9149-349	/	/
DIP & Mains Supply Voltage Variations -conditioning					
Immunity Test system	TESEQ	NSG3040	2173	2018/5/15	2019/5/14
	TESEQ	VAR 3005-D16	2018	2018/5/15	2019/5/14
Other					
Equipment	Manufacturer	Model NO	Serial NO.	Cal Date	Cal Due Date
Temperature&humidity recorder	PINYI	HTC-1	/	2018/7/19	2019/7/18
Pressure meter	YIOU	BY-2003P	E01406062	2018/12/3	2019/11/26

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 26 °C Humidity: 48 % RH Atmospheric Pressure: 1022.2 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

6.1.2 Test Setup Diagram

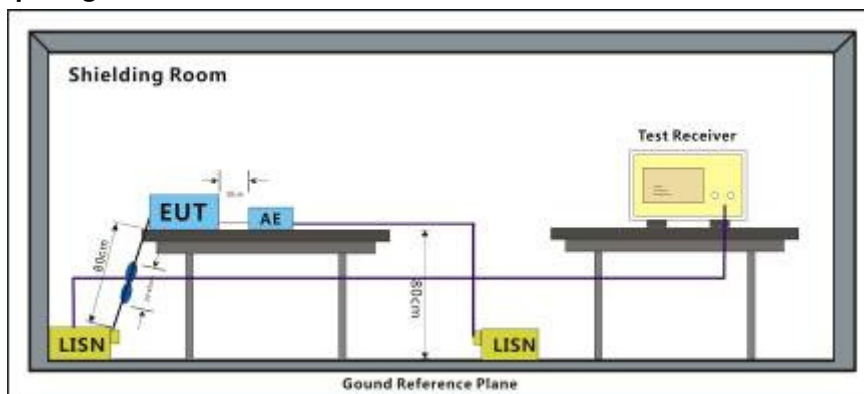


6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes : Emission Level=Read Level + LISN Factor + Cable Loss

Mode:a; Line:Live Line

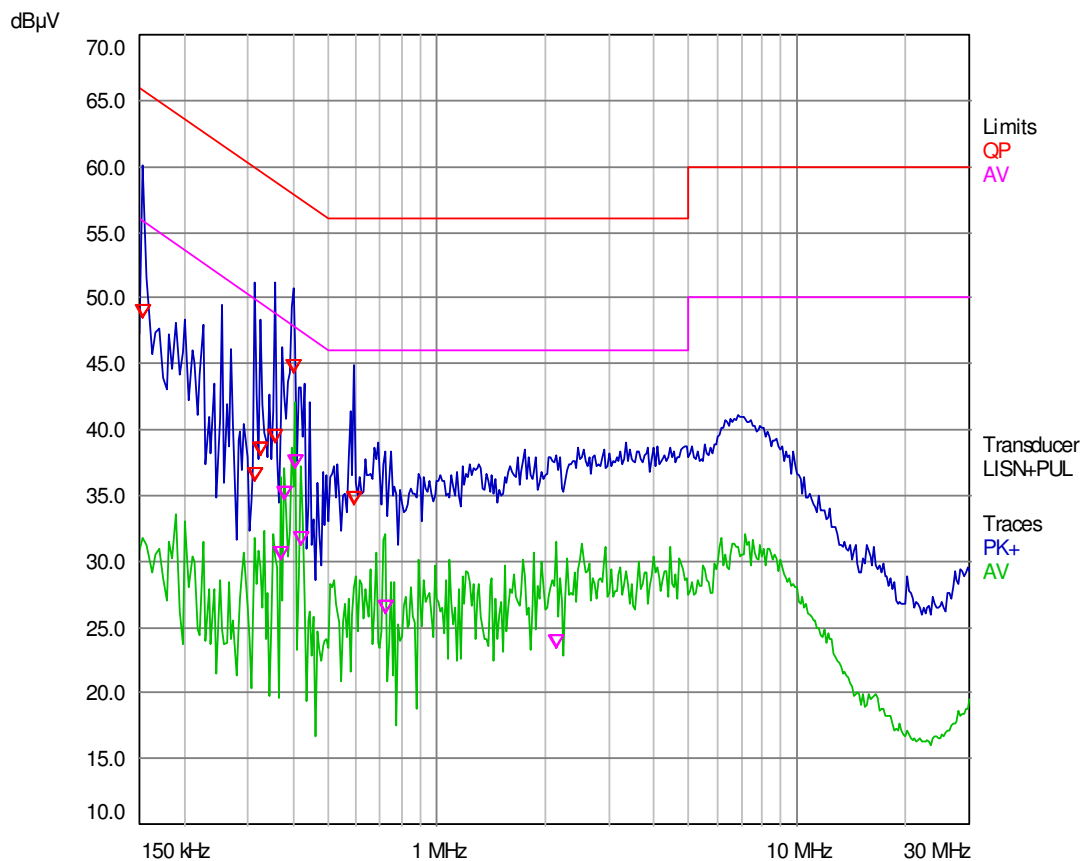


Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)	Comment
1 QP	0.154	48.57	65.78	-17.21	L1 / on
1 QP	0.314	36.10	59.86	-23.76	L1 / on
1 QP	0.326	38.09	59.55	-21.46	L1 / on
1 QP	0.358	39.03	58.77	-19.74	L1 / on
2 CA	0.37	30.05	48.50	-18.45	L1 / on
2 CA	0.378	34.70	48.32	-13.62	L1 / on
1 QP	0.402	44.33	57.81	-13.48	L1 / on
2 CA	0.406	37.01	47.73	-10.72	L1 / on
2 CA	0.422	31.26	47.41	-16.15	L1 / on
1 QP	0.594	34.32	56.00	-21.68	L1 / on
2 CA	0.722	26.04	46.00	-19.96	L1 / on
2 CA	2.146	23.39	46.00	-22.61	L1 / on

* = limit exceeded

Mode:a; Line:Neutral Line

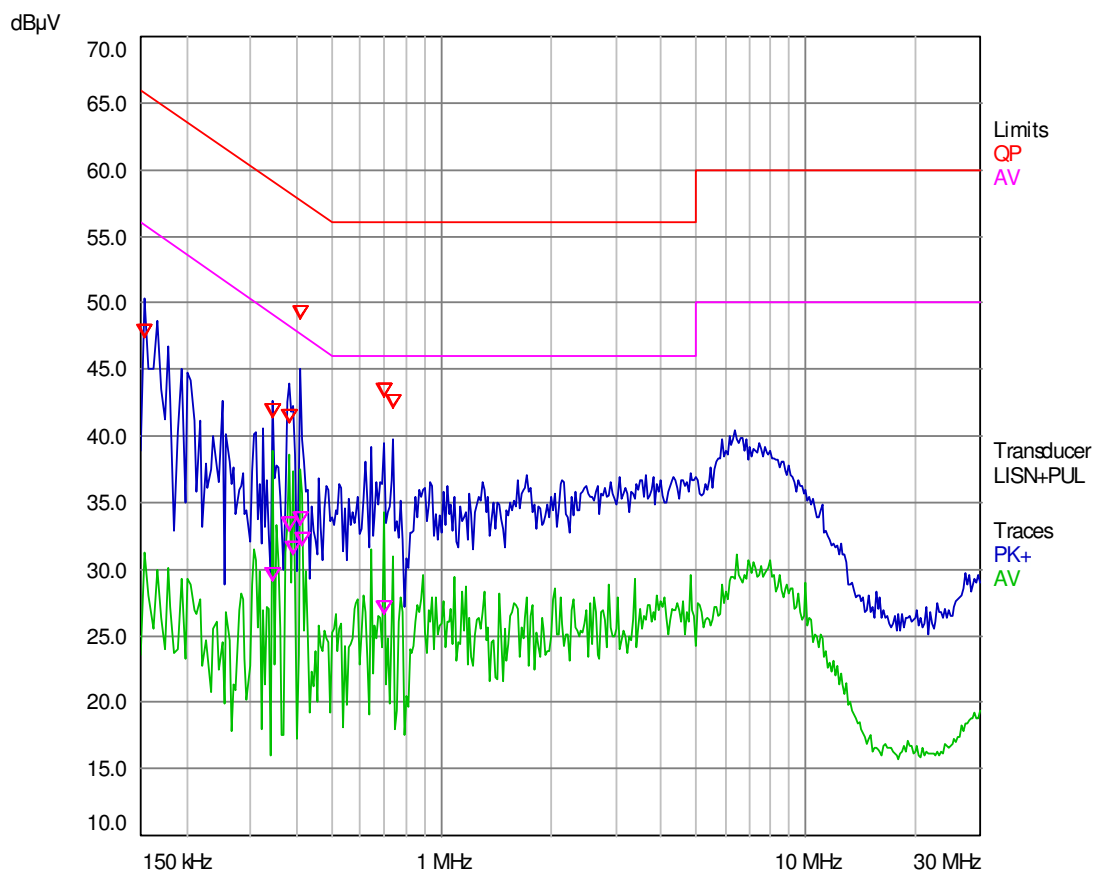


Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)	Comment
1 QP	0.154	47.38	65.78	-18.40	N / on
1 QP	0.346	41.38	59.06	-17.68	N / on
2 CA	0.346	29.08	49.06	-19.98	N / on
1 QP	0.382	40.94	58.24	-17.30	N / on
2 CA	0.382	32.86	48.24	-15.38	N / on
2 CA	0.39	31.11	48.06	-16.95	N / on
1 QP	0.41	48.77	57.65	-8.88	N / on
2 CA	0.41	33.24	47.65	-14.41	N / on
2 CA	0.418	31.77	47.49	-15.72	N / on
1 QP	0.694	42.94	56.00	-13.06	N / on
2 CA	0.694	26.57	46.00	-19.43	N / on
1 QP	0.742	42.10	56.00	-13.90	N / on

* = limit exceeded

Mode:b; Line:Live Line

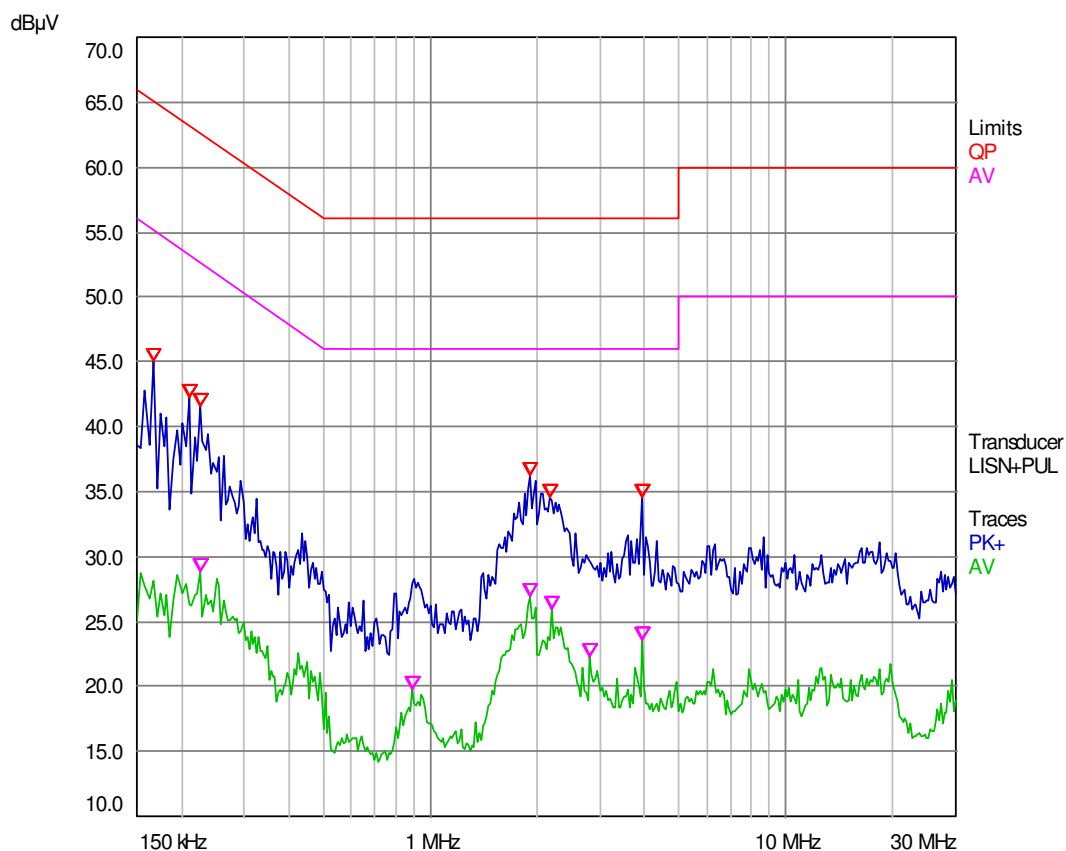


Peak Search Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)	Comment
1 PK+	0.166	44.97	65.16	-20.19	L1 / on
1 PK+	0.21	42.30	63.21	-20.91	L1 / on
1 PK+	0.226	41.60	62.60	-21.00	L1 / on
2 AV	0.226	28.90	52.60	-23.70	L1 / on
2 AV	0.886	19.79	46.00	-26.21	L1 / on
2 AV	1.906	26.95	46.00	-19.05	L1 / on
1 PK+	1.91	36.17	56.00	-19.83	L1 / on
1 PK+	2.182	34.59	56.00	-21.41	L1 / on
2 AV	2.206	25.91	46.00	-20.09	L1 / on
2 AV	2.818	22.30	46.00	-23.70	L1 / on
1 PK+	3.942	34.50	56.00	-21.50	L1 / on
2 AV	3.942	23.56	46.00	-22.44	L1 / on

* = limit exceeded

Mode:b; Line:Neutral Line

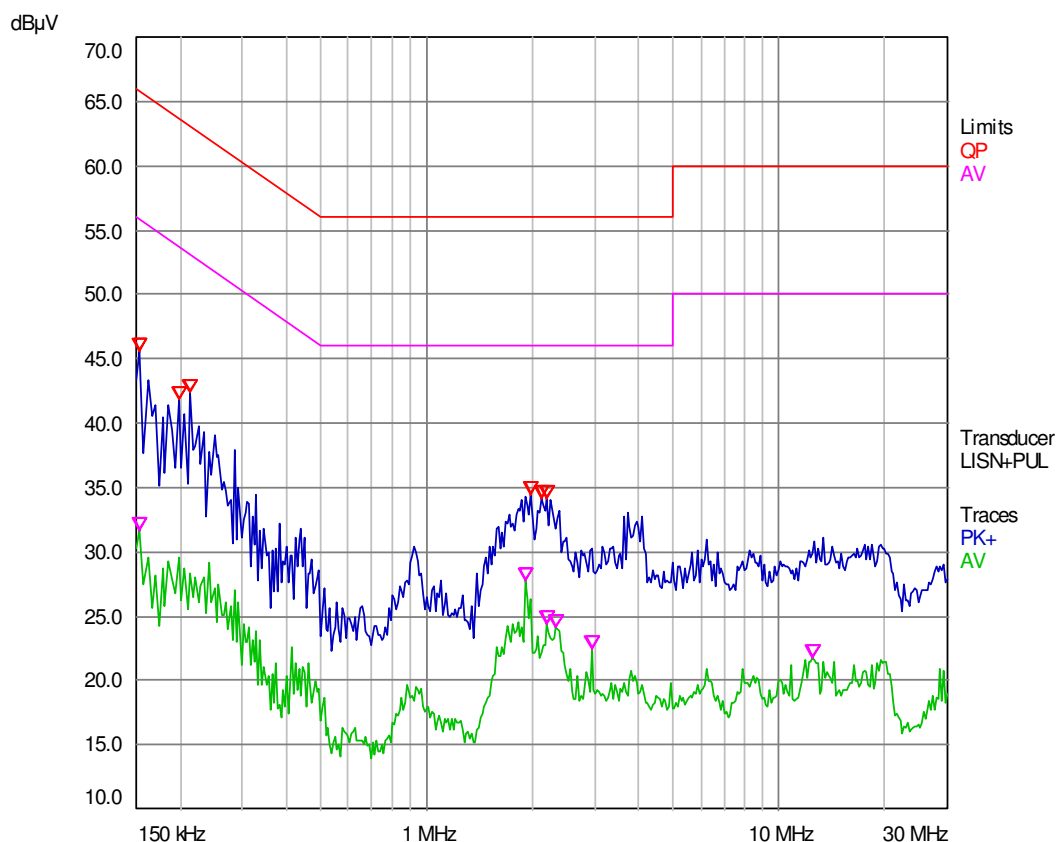

Peak Search Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)	Comment
1 PK+	0.154	45.58	65.78	-20.20	N / on
2 AV	0.154	31.66	55.78	-24.12	N / on
1 PK+	0.198	41.82	63.69	-21.87	N / on
1 PK+	0.214	42.44	63.05	-20.61	N / on
2 AV	1.902	27.66	46.00	-18.34	N / on
1 PK+	1.974	34.38	56.00	-21.62	N / on
1 PK+	2.11	34.11	56.00	-21.89	N / on
1 PK+	2.186	34.16	56.00	-21.84	N / on
2 AV	2.198	24.36	46.00	-21.64	N / on
2 AV	2.318	24.12	46.00	-21.88	N / on
2 AV	2.93	22.35	46.00	-23.65	N / on
2 AV	12.426	21.69	50.00	-28.31	N / on

* = limit exceeded


6.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz(Voltage)	84-74(dBμV) quasi-peak; 74-64(dBμV) average
0.5M-30MHz(Voltage)	74(dBμV) quasi-peak; 64(dBμV) average
0.15M-0.5MHz(Current)	40-30(dBμV) quasi-peak; 30-20(dBμV) average
0.5M-30MHz(Current)	30(dBμV) quasi-peak; 20(dBμV) average
Detector:	9kHz resolution bandwidth 0.15M to 30MHz
Remark:	The voltage measured shall be corrected at each frequency of interest as follows: if the current margin with respect to the current limit is ≤ 6 dB, the actual current margin shall be subtracted from the measured voltage; if the current margin with respect to the current limit is > 6 dB, 6 dB shall be subtracted from the measured voltage.

6.2.1 E.U.T. Operation

Operating Environment:					
Temperature:	26 °C	Humidity:	48 % RH	Atmospheric Pressure:	1022.2 mbar
Test mode	a: Typical configuration: DC12V Power supply network preview.				
	b: Typical configuration: POE Power supply network preview.				


6.2.2 Test Setup Diagram

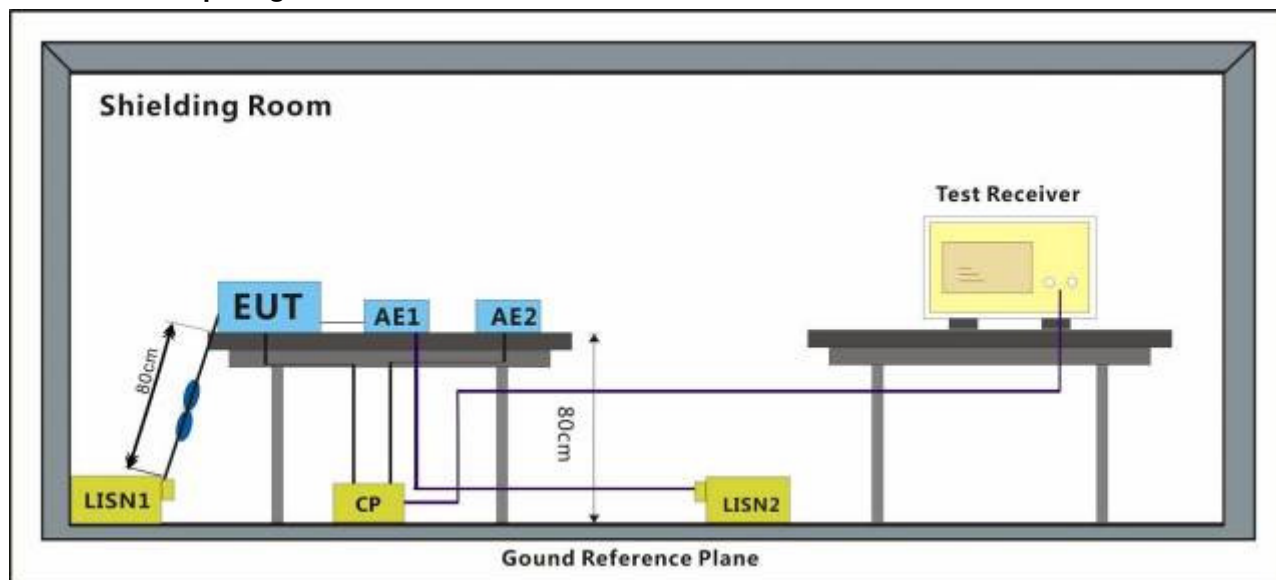

6.2.3 Measurement Data

Notes : Emission Level=Read Level + LISN Factor + Cable Loss

Mode a :
10Mbps

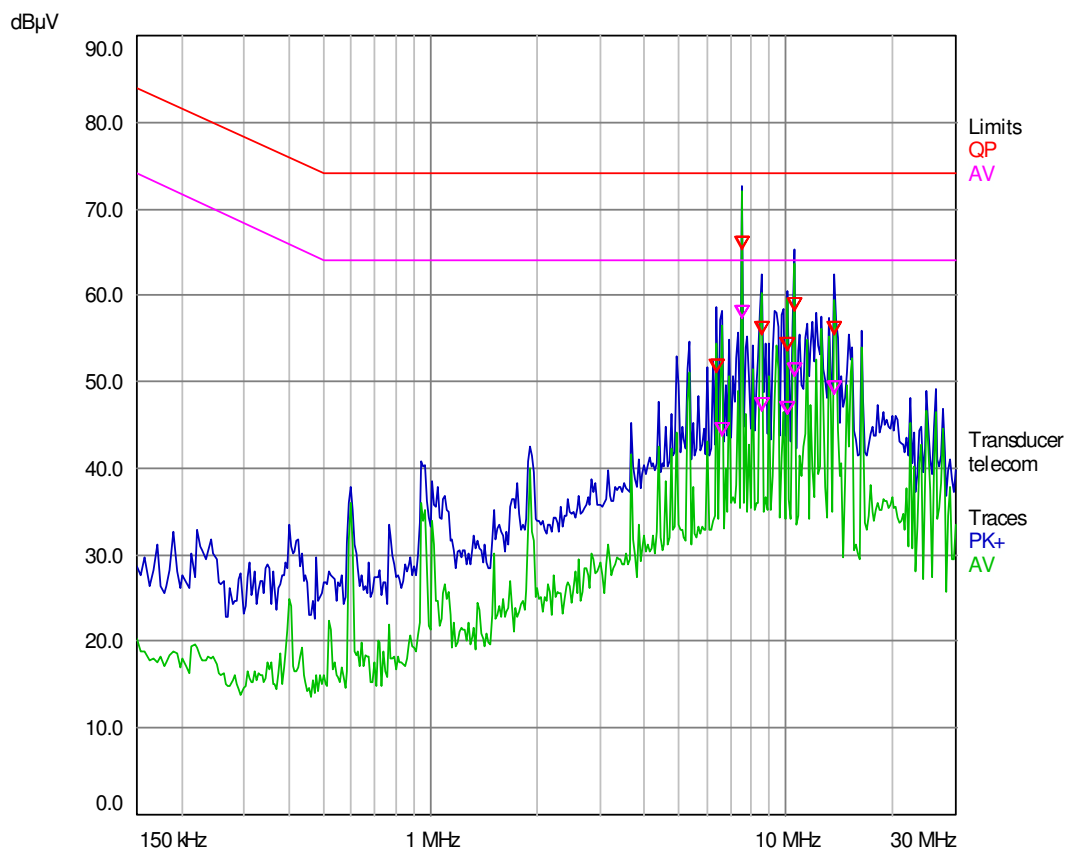


Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)
1 QP	6.414	51.08	74.00	-22.92
2 CA	6.578	43.74	64.00	-20.26
1 QP	7.502	65.40	74.00	-8.60
2 CA	7.502	57.40	64.00	-6.60
1 QP	8.586	55.40	74.00	-18.60
2 CA	8.59	46.71	64.00	-17.29
1 QP	10.054	53.62	74.00	-20.38
2 CA	10.054	46.21	64.00	-17.79
1 QP	10.598	58.21	74.00	-15.79
2 CA	10.598	50.56	64.00	-13.44
1 QP	13.694	55.47	74.00	-18.53
2 CA	13.698	48.54	64.00	-15.46

* = limit exceeded

100Mbps

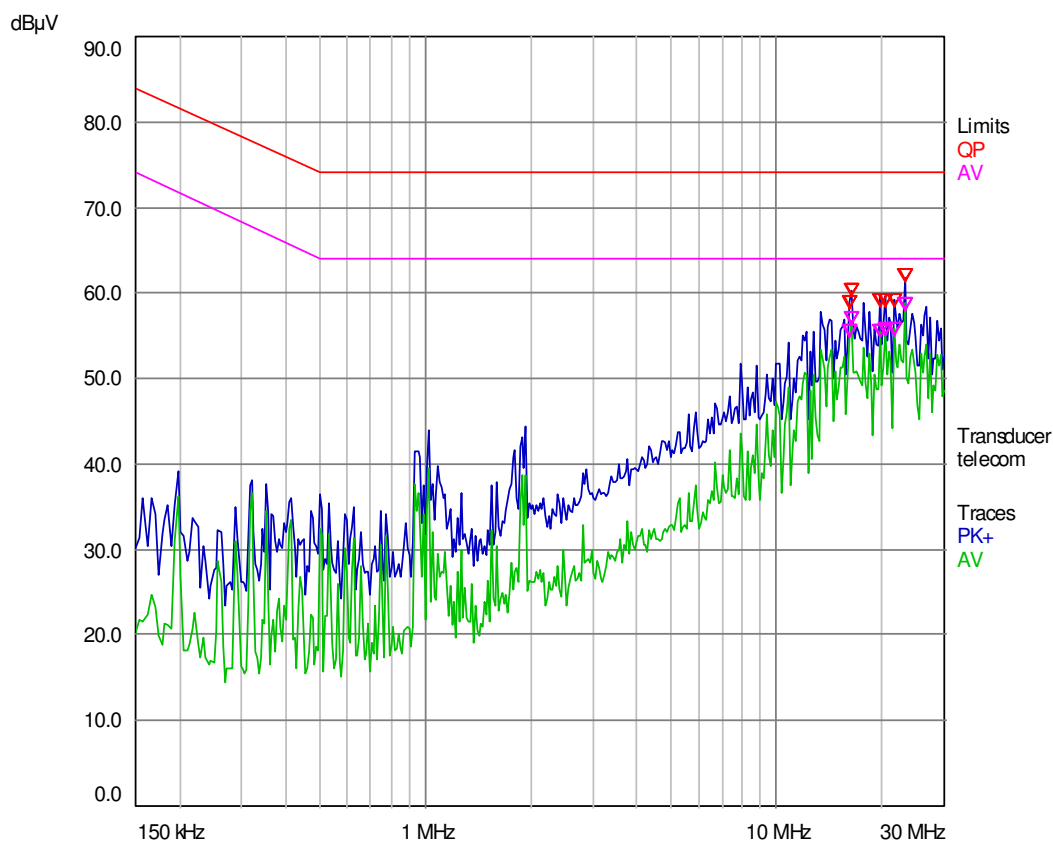


Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)
1 QP	16.166	58.27	74.00	-15.73
2 CA	16.166	54.78	64.00	-9.22
1 QP	16.23	59.66	74.00	-14.34
2 CA	16.23	56.23	64.00	-7.77
1 QP	19.71	58.43	74.00	-15.57
2 CA	19.71	54.94	64.00	-9.06
1 QP	20.258	58.46	74.00	-15.54
2 CA	20.258	55.00	64.00	-9.00
1 QP	21.662	58.50	74.00	-15.50
2 CA	21.662	55.13	64.00	-8.87
1 QP	23.13	61.24	74.00	-12.76
2 CA	23.13	57.96	64.00	-6.04

* = limit exceeded

Mode b
10Mbps

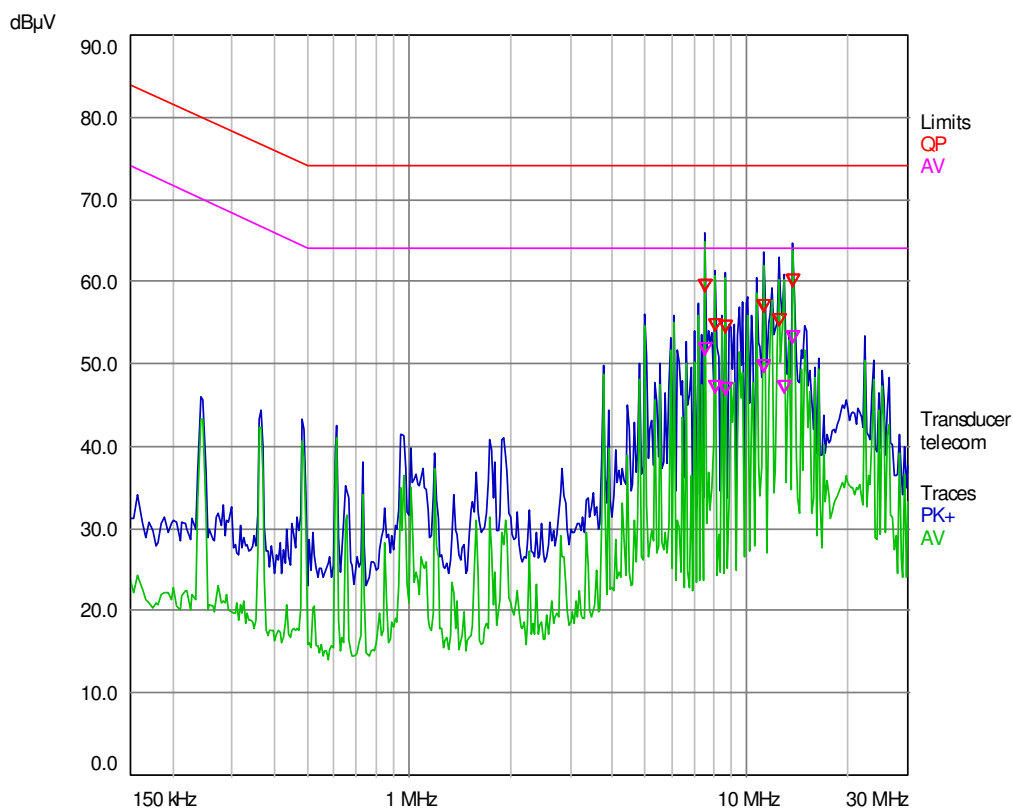


Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)
1 QP	7.554	58.74	74.00	-15.26
2 CA	7.554	51.01	64.00	-12.99
1 QP	8.098	54.06	74.00	-19.94
2 CA	8.098	46.54	64.00	-17.46
1 QP	8.642	53.88	74.00	-20.12
2 CA	8.642	46.32	64.00	-17.68
1 QP	11.194	56.20	74.00	-17.80
2 CA	11.194	48.97	64.00	-15.03
1 QP	12.45	54.72	74.00	-19.28
2 CA	12.826	46.51	64.00	-17.49
1 QP	13.75	59.51	74.00	-14.49
2 CA	13.75	52.49	64.00	-11.51

* = limit exceeded

100Mbps

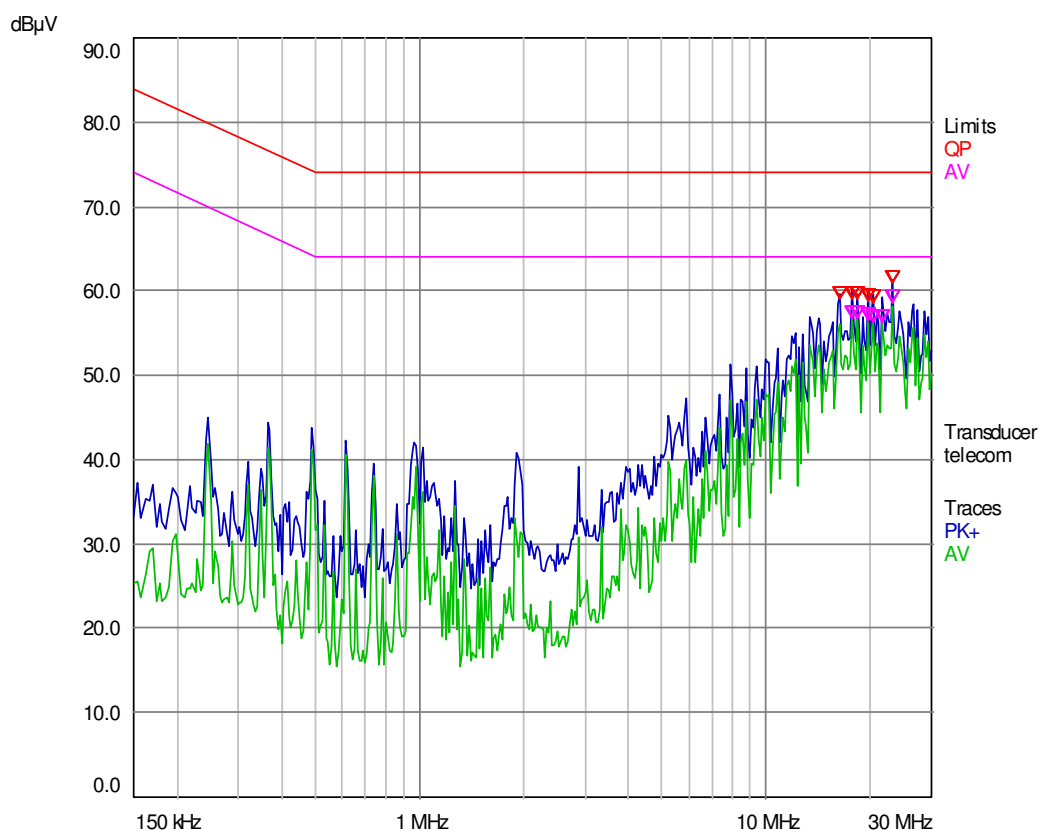

Final Measurement Results

Trace	Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Delta Limit (dB)
1 QP	16.23	59.11	74.00	-14.89
1 QP	17.694	59.12	74.00	-14.88
2 CA	17.694	56.65	64.00	-7.35
1 QP	18.242	59.09	74.00	-14.91
2 CA	18.242	56.79	64.00	-7.21
1 QP	19.71	58.74	74.00	-15.26
2 CA	19.71	56.42	64.00	-7.58
1 QP	20.258	58.56	74.00	-15.44
2 CA	20.258	56.40	64.00	-7.60
2 CA	21.662	56.35	64.00	-7.65
1 QP	23.13	61.00	74.00	-13.00
2 CA	23.13	58.53	64.00	-5.47

* = limit exceeded

6.3 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	30MHz to 1GHz
Limit:	
30MHz-230MHz	40 dB(μ V/m) quasi-peak
230MHz-1GHz	47 dB(μ V/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 47 % RH Atmospheric Pressure: 1022 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.

b: Typical configuration: POE Power supply network preview.

6.3.2 Test Setup Diagram

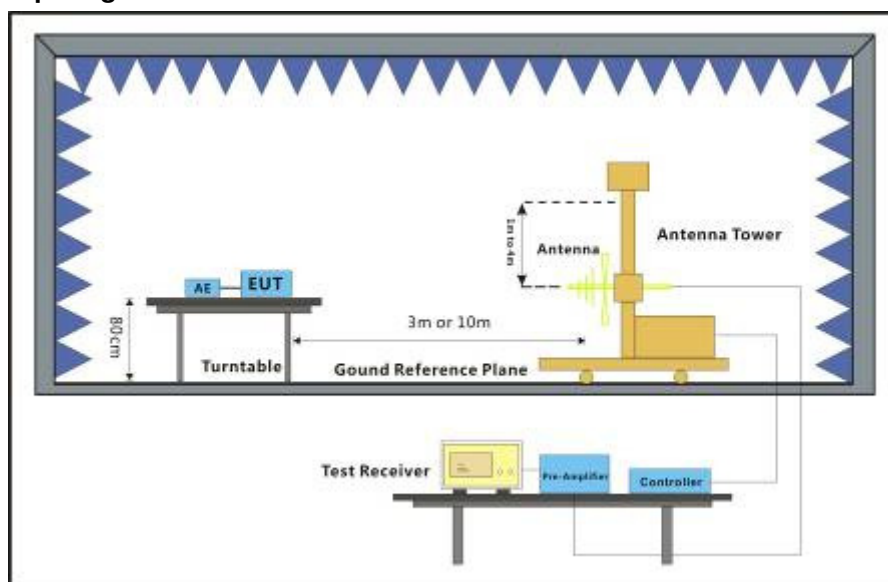


6.3.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Notes : Emission Level=Read Level + Antenna Factor + Cable Loss – Preamp Factor

Mode:a, Polarization:Horizontal


In

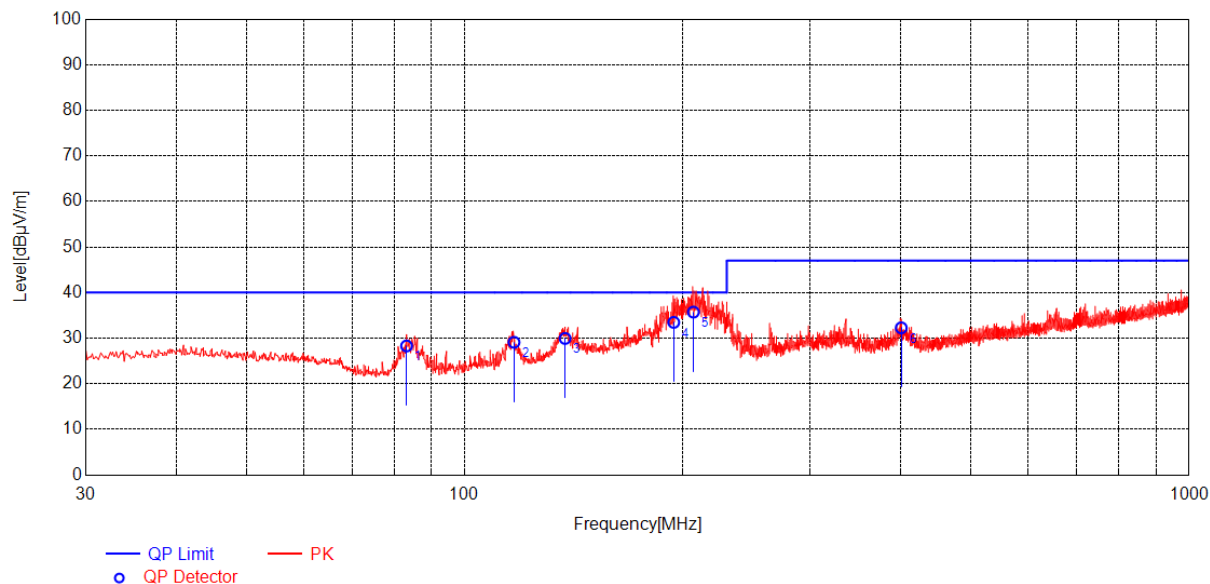

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	83.1075	10.09	28.30	40.00	11.70	200	165	Horizontal
2	116.9363	12.47	29.10	40.00	10.90	200	33	Horizontal
3	137.5488	14.08	29.95	40.00	10.05	200	220	Horizontal
4	194.2884	11.20	33.47	40.00	6.53	177	107.9	Horizontal
5	206.8205	11.13	35.73	40.00	4.27	109.5	123.4	Horizontal
6	400.4188	15.95	32.28	47.00	14.72	100	144	Horizontal

Mode a: Polarization:Vertical
In

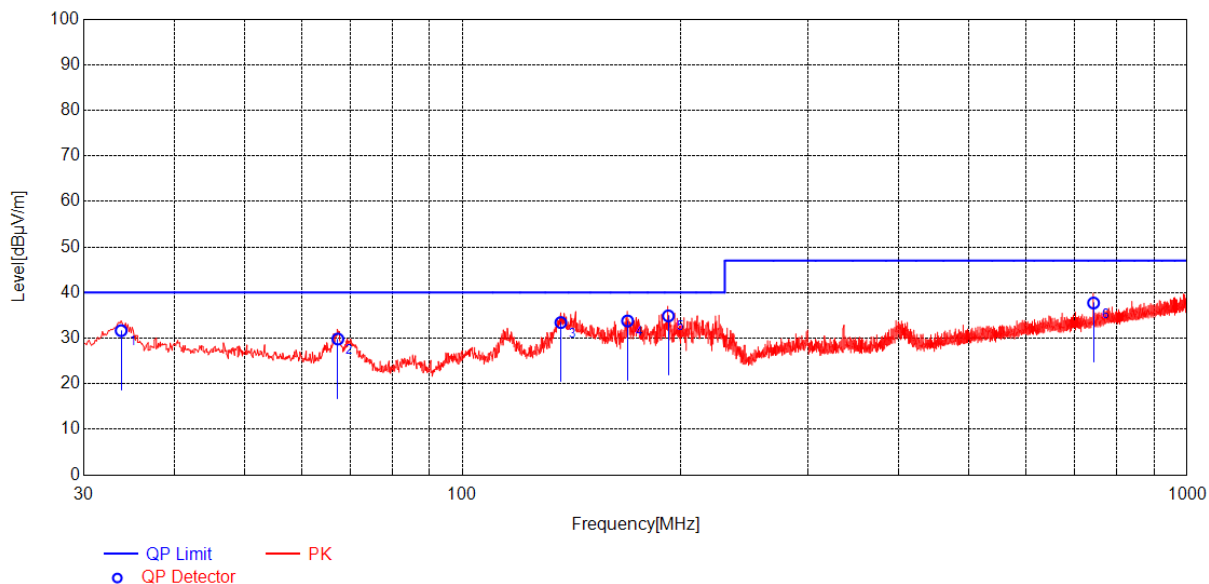


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.7588	14.13	31.65	40.00	8.35	100	295	Vertical
2	67.2238	11.69	29.81	40.00	10.19	100	359	Vertical
3	136.5788	14.03	33.43	40.00	6.57	100	22	Vertical
4	168.8313	14.24	33.79	40.00	6.21	100	55	Vertical
5	192.2325	11.34	34.90	40.00	5.10	100	72	Vertical
6	742.5863	21.58	37.72	47.00	9.28	100	236	Vertical



Mode:a, Polarization:Horizontal
Out

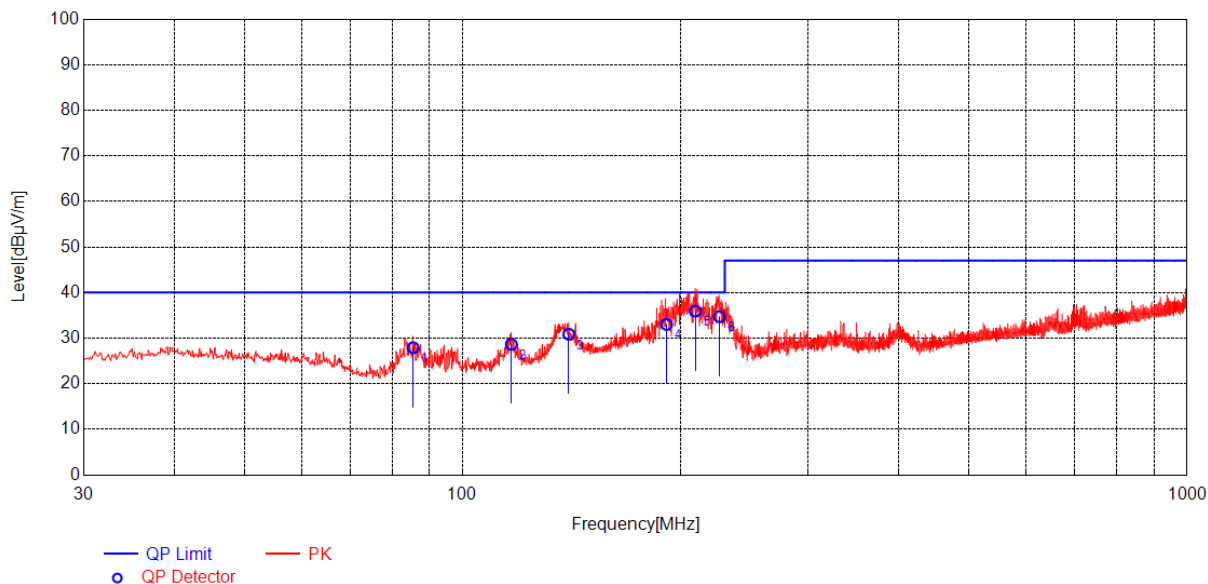


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	85.4113	10.16	27.92	40.00	12.08	200	192	Horizontal
2	116.6938	12.44	28.66	40.00	11.34	200	22	Horizontal
3	140.0950	14.21	30.86	40.00	9.14	200	238	Horizontal
4	191.1515	11.42	33.01	40.00	6.99	195.9	133.2	Horizontal
5	209.4826	11.22	35.95	40.00	4.05	124.8	124.4	Horizontal
6	226.1456	11.79	34.73	40.00	5.27	124.6	108.6	Horizontal




Mode a: Polarization:Vertical
Out

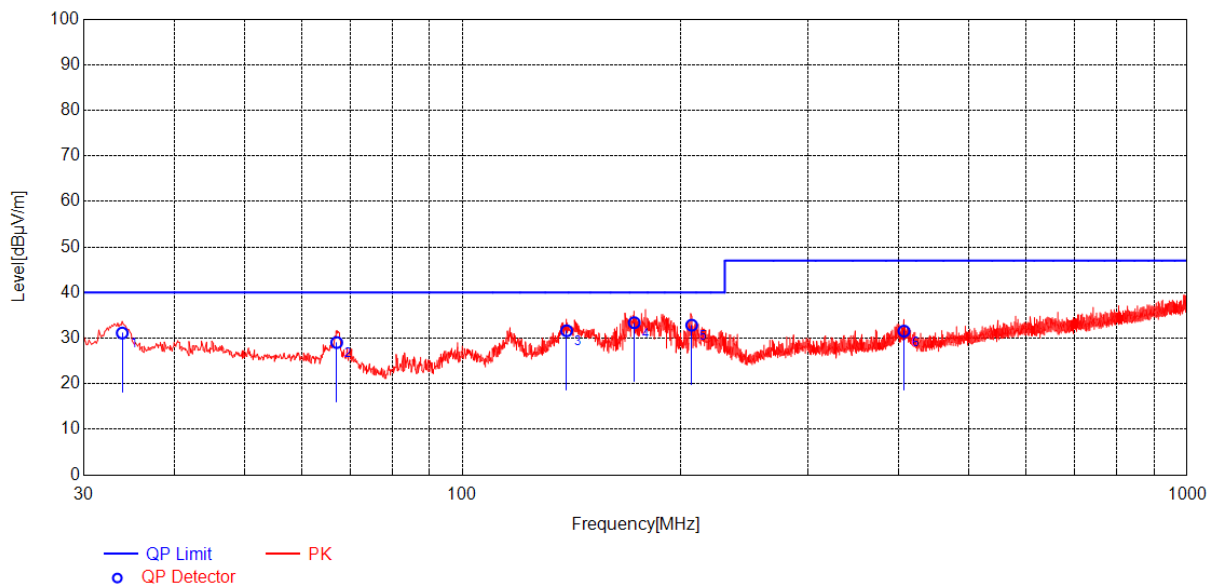

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.8800	14.14	31.13	40.00	8.87	100	222	Vertical
2	66.9813	11.75	29.05	40.00	10.95	100	226	Vertical
3	139.1250	14.16	31.63	40.00	8.37	100	14	Vertical
4	172.4688	13.73	33.40	40.00	6.60	100	118	Vertical
5	207.0250	11.14	32.85	40.00	7.15	200	136	Vertical
6	406.4813	16.15	31.55	47.00	15.45	100	359	Vertical


Mode b;Polarization:Horizontal

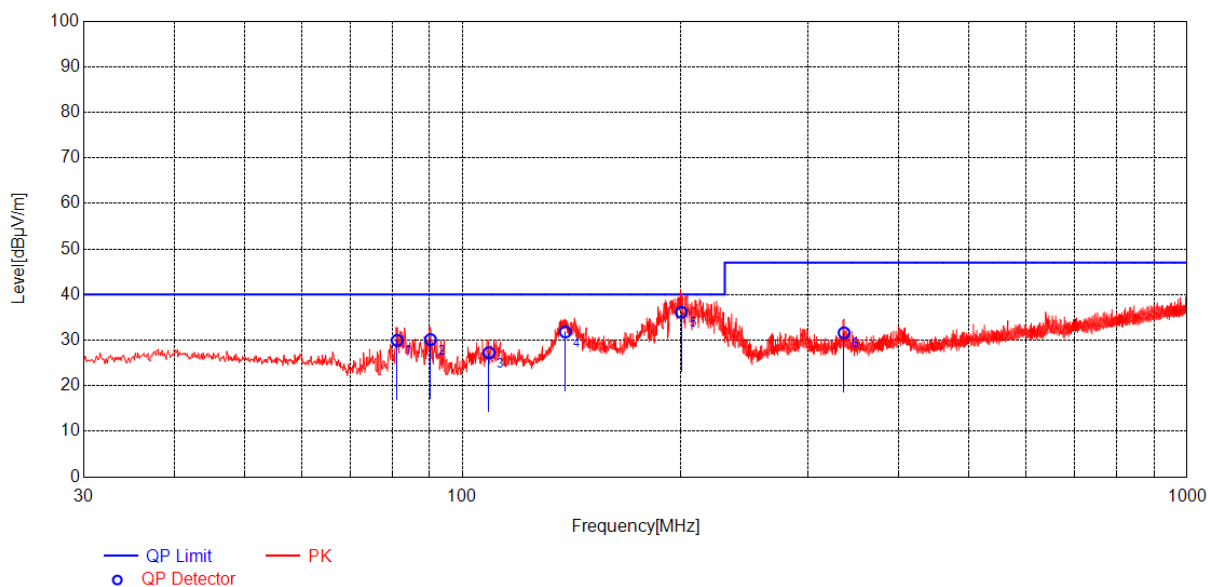

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	81.1675	10.04	29.96	40.00	10.04	200	346	Horizontal
2	90.2613	10.31	30.12	40.00	9.88	200	322	Horizontal
3	108.6913	11.40	27.25	40.00	12.75	200	182	Horizontal
4	138.5188	14.13	31.80	40.00	8.20	200	216	Horizontal
5	200.2912	10.91	36.12	40.00	3.88	190.9	146	Horizontal
6	336.0350	15.00	31.62	47.00	15.38	100	198	Horizontal

Mode b;Polarization:Vertical

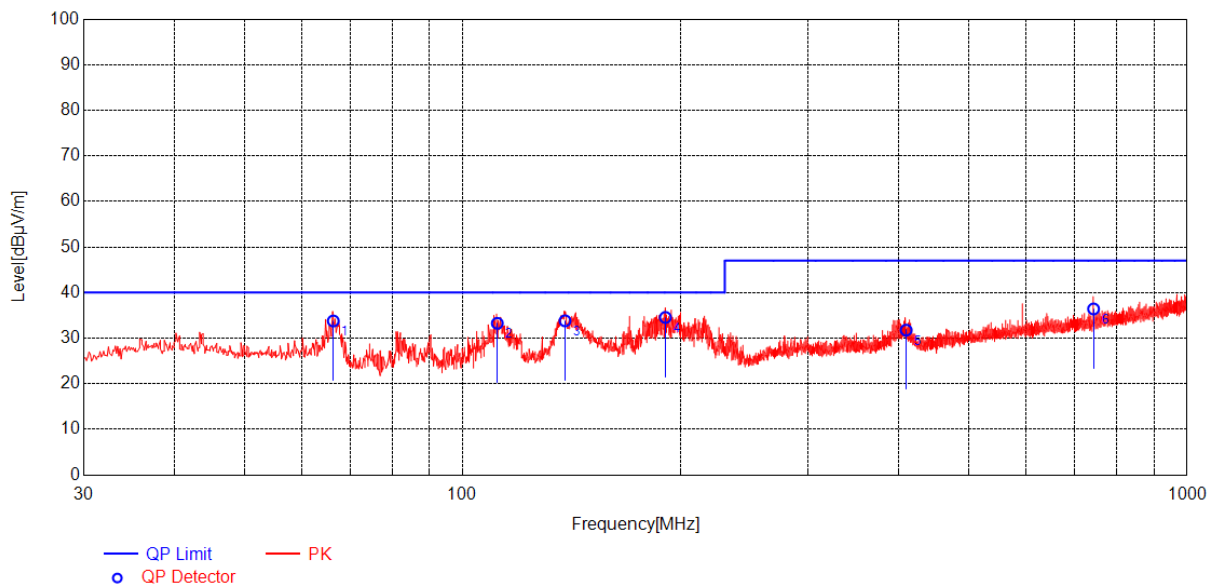

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	66.2538	11.84	33.79	40.00	6.21	100	216	Vertical
2	111.6013	11.72	33.26	40.00	6.74	100	84	Vertical
3	138.3975	14.12	33.82	40.00	6.18	100	360	Vertical
4	190.4138	11.47	34.56	40.00	5.44	100	164	Vertical
5	409.2700	16.21	31.77	47.00	15.23	100	14	Vertical
6	742.5863	21.58	36.42	47.00	10.58	100	233	Vertical


6.4 Radiated Emissions (above 1GHz)

Test Requirement:	EN 55032:2015
Test Method:	EN 55032:2015
Frequency Range:	Above 1GHz
Measurement Distance:	3m
Limit:	
1GHz-3GHz	70 dB(μV/m) peak, 50 dB(μV/m) average
3GHz-6GHz	74 dB(μV/m) peak, 54dB(μV/m) average
Detector:	Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 6000MHz

6.4.1 E.U.T. Operation

Operating Environment:					
Temperature:	23 °C	Humidity:	57 % RH	Atmospheric Pressure:	1022 mbar
Test mode	a: Typical configuration: DC12V Power supply network preview.				
	b: Typical configuration: POE Power supply network preview.				

6.4.2 Test Setup Diagram

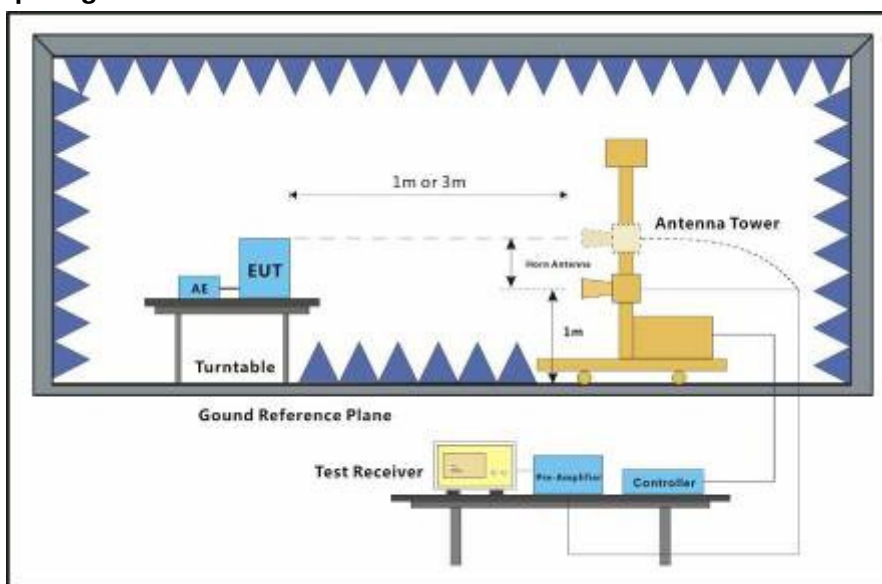


6.4.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Notes : Emission Level=Read Level + Antenna Factor + Cable Loss – Preamp Factor

Mode:a; Polarization:Horizontal


In

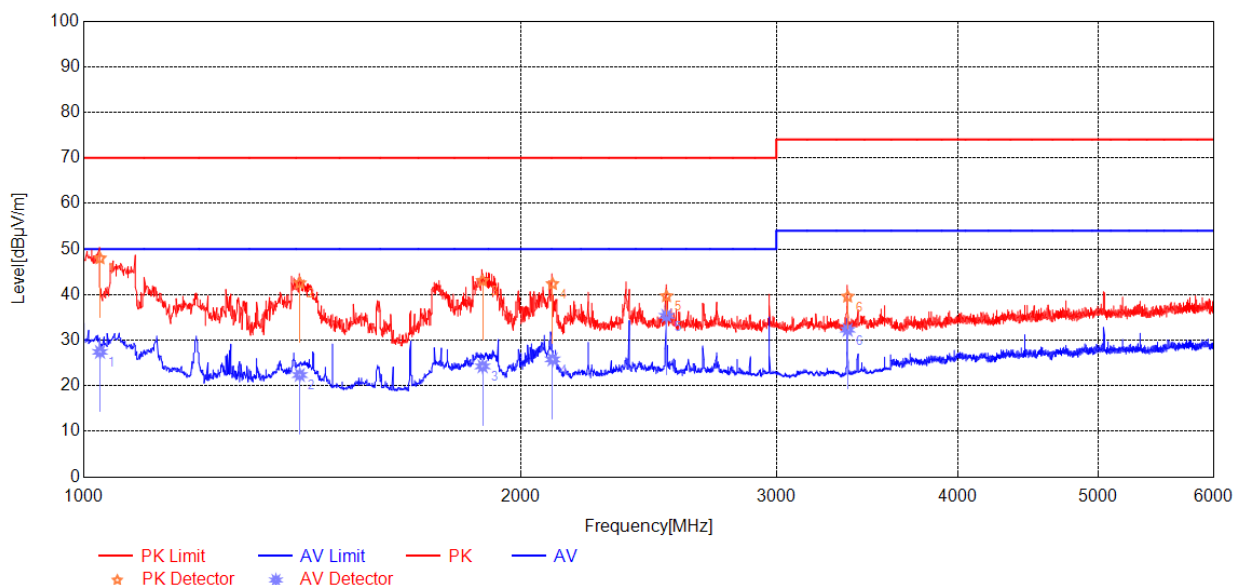

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1025.83	-11.83	47.97	70.00	22.03	27.42	50.00	22.58	100	2	Horizontal
2	1408.33	-12.06	42.52	70.00	27.48	22.36	50.00	27.64	100	315	Horizontal
3	1882.50	-11.22	43.03	70.00	26.97	24.26	50.00	25.74	100	27	Horizontal
4	2103.33	-9.91	42.34	70.00	27.66	25.78	50.00	24.22	100	48	Horizontal
5	2520.00	-7.68	39.66	70.00	30.34	35.34	50.00	14.66	100	226	Horizontal
6	3359.16	-5.68	39.58	74.00	34.42	32.27	54.00	21.73	100	27	Horizontal


Mode:a; Polarization:Vertical
In

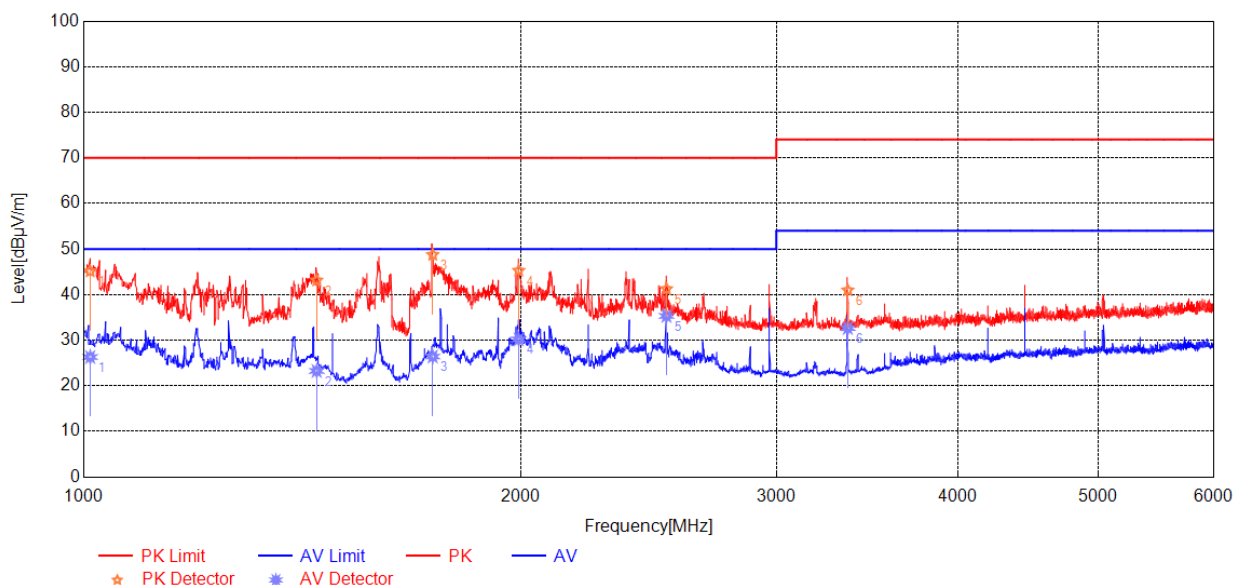

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1010.00	-11.67	45.13	70.00	24.87	26.30	50.00	23.70	200	360	Vertical
2	1446.66	-12.13	43.13	70.00	26.87	23.25	50.00	26.75	100	346	Vertical
3	1739.16	-11.79	48.75	70.00	21.25	26.41	50.00	23.59	100	341	Vertical
4	1993.33	-10.52	45.27	70.00	24.73	30.17	50.00	19.83	100	18	Vertical
5	2520.00	-7.68	41.23	70.00	28.77	35.31	50.00	14.69	100	55	Vertical
6	3360.00	-5.68	40.96	74.00	33.04	32.66	54.00	21.34	100	195	Vertical


Mode:a; Polarization:Horizontal
Out

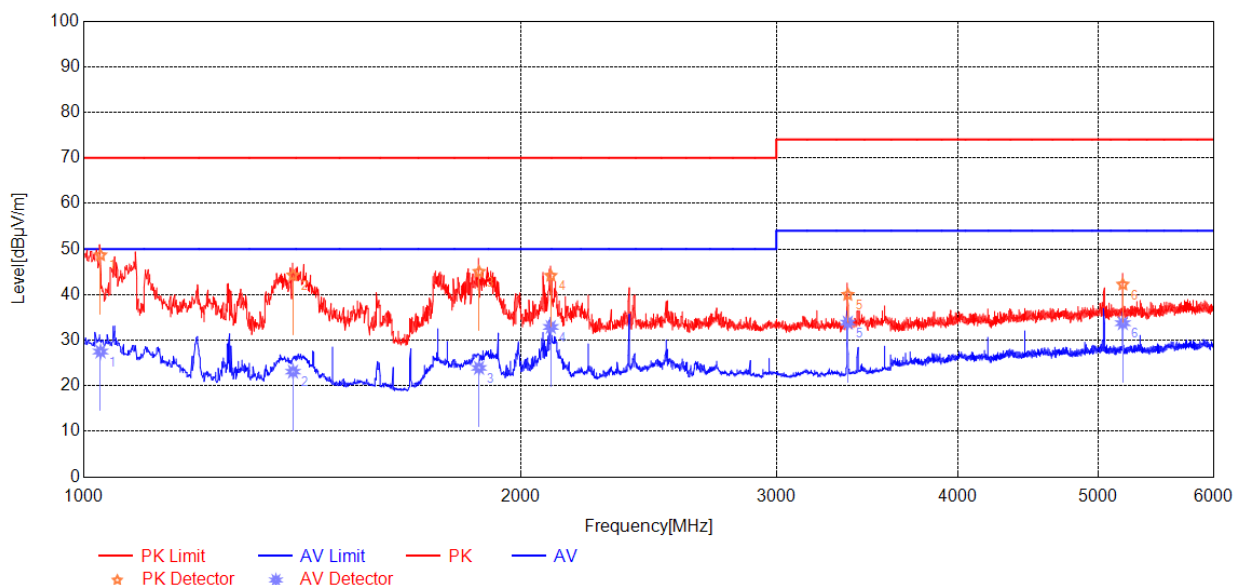

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1026.66	-11.83	48.65	70.00	21.35	27.50	50.00	22.50	100	25	Horizontal
2	1393.33	-12.05	44.25	70.00	25.75	23.09	50.00	26.91	100	315	Horizontal
3	1871.66	-11.26	45.02	70.00	24.98	23.92	50.00	26.08	100	25	Horizontal
4	2097.50	-9.99	44.15	70.00	25.85	32.89	50.00	17.11	100	51	Horizontal
5	3360.00	-5.68	39.98	74.00	34.02	33.87	54.00	20.13	100	315	Horizontal
6	5198.33	-0.51	42.23	74.00	31.77	33.72	54.00	20.28	100	89	Horizontal


Mode:a; Polarization:Vertical
Out

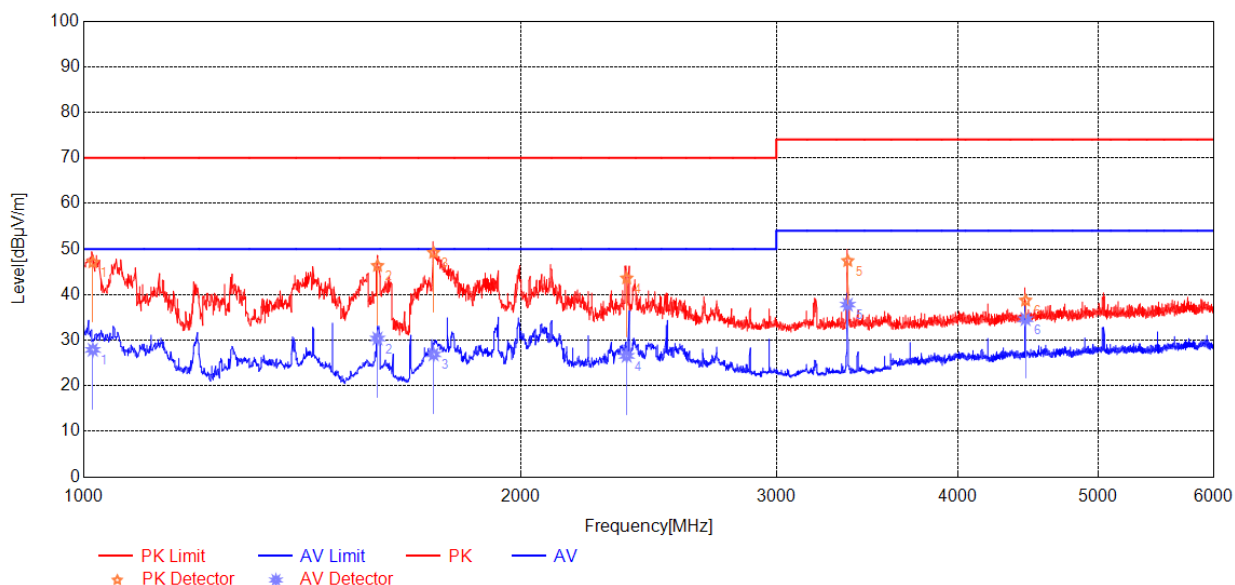

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1014.16	-11.75	47.10	70.00	22.90	27.88	50.00	22.12	200	338	Vertical
2	1593.33	-12.22	46.32	70.00	23.68	30.37	50.00	19.63	100	346	Vertical
3	1741.66	-11.77	49.20	70.00	20.80	26.88	50.00	23.12	100	346	Vertical
4	2365.83	-8.43	43.59	70.00	26.41	26.56	50.00	23.44	100	346	Vertical
5	3360.00	-5.68	47.39	74.00	26.61	37.79	54.00	16.21	100	302	Vertical
6	4455.00	-2.01	38.72	74.00	35.28	34.62	54.00	19.38	100	212	Vertical


Mode b;Polarization:Horizontal

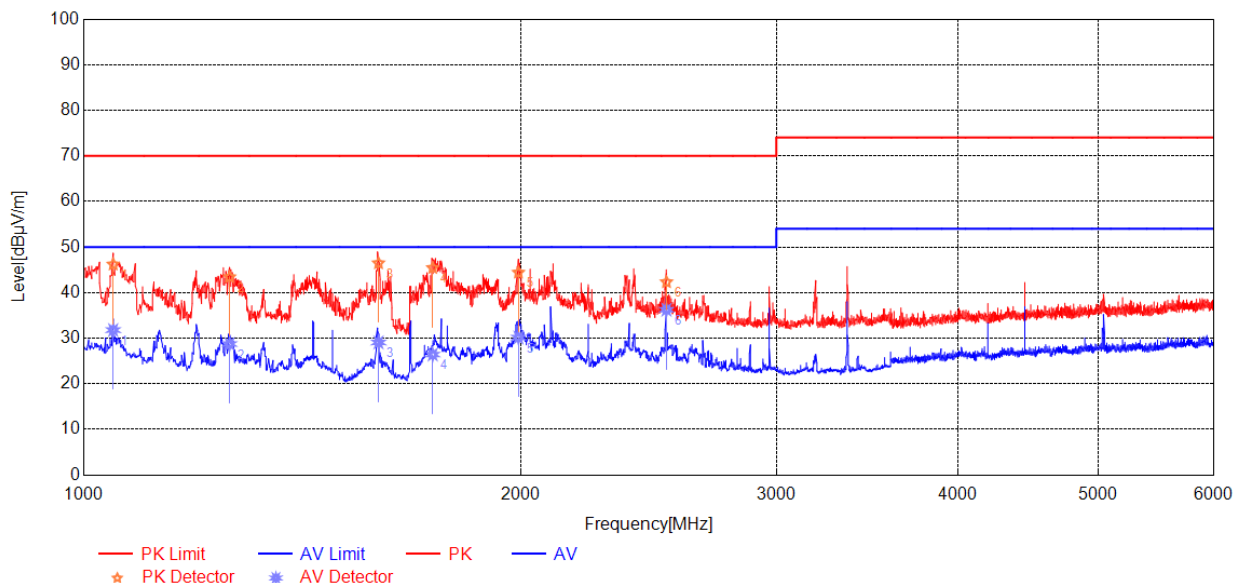

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1047.50	-11.96	46.19	70.00	23.81	31.78	50.00	18.22	100	239	Vertical
2	1260.00	-12.41	43.41	70.00	26.59	28.72	50.00	21.28	100	119	Vertical
3	1595.83	-12.28	46.46	70.00	23.54	29.06	50.00	20.94	100	1	Vertical
4	1739.16	-11.79	45.42	70.00	24.58	26.41	50.00	23.59	200	358	Vertical
5	1992.50	-10.53	44.41	70.00	25.59	30.14	50.00	19.86	100	22	Vertical
6	2520.00	-7.68	42.31	70.00	27.69	36.24	50.00	13.76	100	284	Vertical

Mode b;Polarization:Vertical

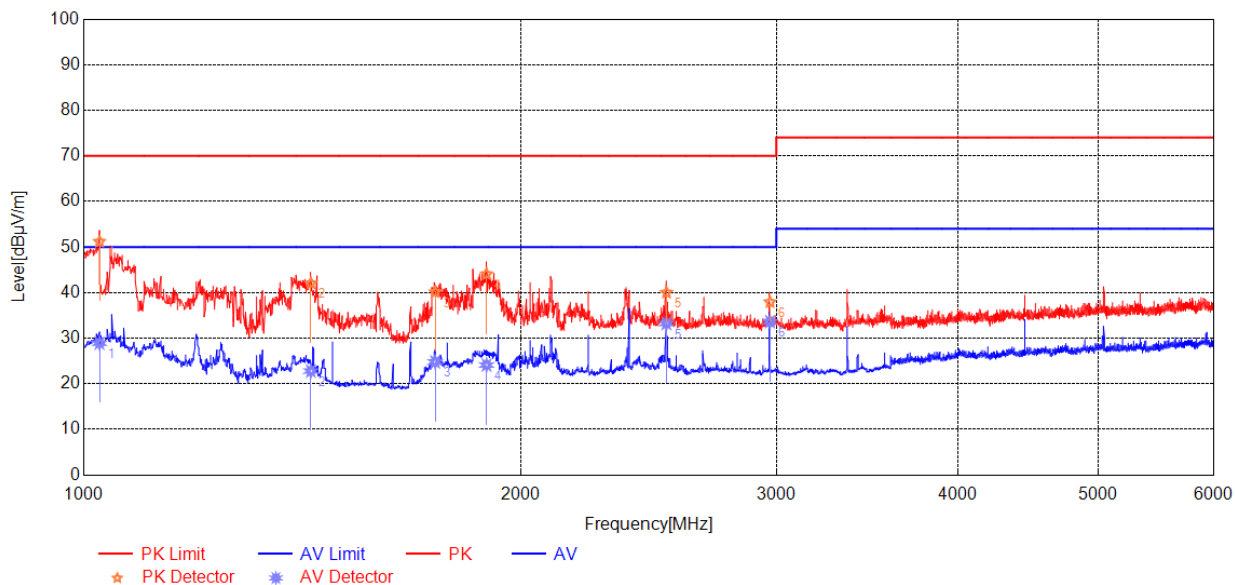

Final Data List

NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Pol.
1	1025.00	-11.84	51.19	70.00	18.81	28.90	50.00	21.10	100	12	Horizontal
2	1433.33	-12.16	42.04	70.00	27.96	22.78	50.00	27.22	100	305	Horizontal
3	1745.83	-11.75	40.10	70.00	29.90	24.78	50.00	25.22	100	305	Horizontal
4	1894.16	-11.17	44.06	70.00	25.94	24.11	50.00	25.89	100	27	Horizontal
5	2520.00	-7.68	40.01	70.00	29.99	33.21	50.00	16.79	200	50	Horizontal
6	2970.00	-6.13	37.91	70.00	32.09	33.62	50.00	16.38	100	200	Horizontal



6.5 Harmonic Current Emission

Test Requirement: EN 61000-3-2:2014
Test Method: EN 61000-3-2:2014
Frequency Range: 100Hz to 2kHz

6.5.1 Measurement Data

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2:2014.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

"For the following categories of equipment, limits are not specified in this standard.- equipment with a rated power of 75W or less, other than lighting equipment."

6.6 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013
Test Method: EN 61000-3-3:2013


6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 55 % RH Atmospheric Pressure: 1019 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

6.6.2 Test Setup Diagram

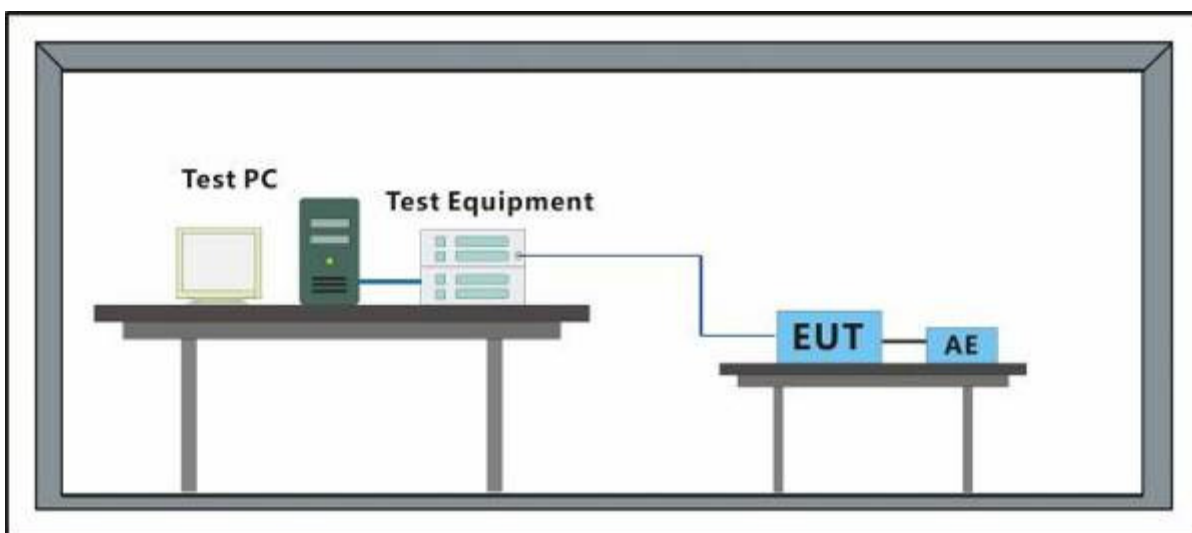

6.6.3 Measurement Data

Mode:a

Parameter values recorded during the test:

Vrms at the end of test (Volt):	219.89		
Highest dt (%):	0.00	Test limit (%):	N/A N/A
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.05	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.263	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.115	Test limit:	0.650 Pass

Mode:b

Parameter values recorded during the test:

Vrms at the end of test (Volt):	219.92		
Highest dt (%):	0.00	Test limit (%):	N/A N/A
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.04	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.271	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.119	Test limit:	0.650 Pass

7 Immunity Test Results

7.1 Performance Criteria Description in EN 50130-4:2011 +A1:2014


There shall be no damage, malfunction or change of status due to the conditioning. Flickering of an indicator during the application of the discharges is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

For further details, please refer to Clause 7.4, 8.4, 9.4, 10.4, 11.4, 12.4 and 13.4, of EN 50130-4.

7.2 Electrostatic Discharge

Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-2:2009
 Number of Discharge: Minimum 10 times at each test point for Air Discharge
 Minimum 50 times at each test point for Contact or VCP & HCP Discharge
 Discharge Mode: Single Discharge
 Discharge Period: 1 second minimum

7.2.1 Test Setup Diagram

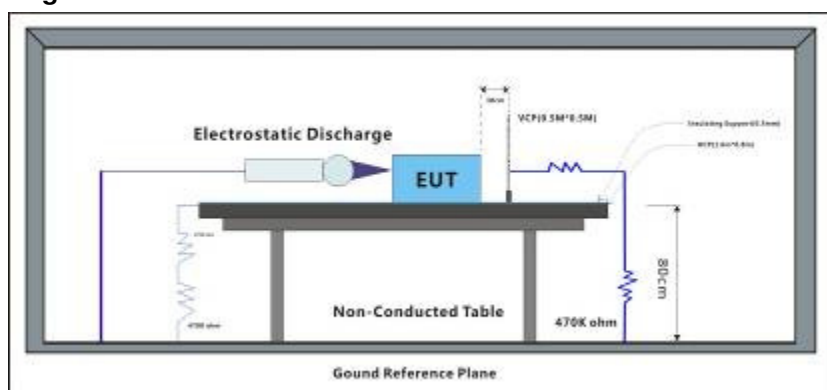

7.2.2 E.U.T. Operation

Operating Environment:
 Temperature: 19.8 °C Humidity: 58 % RH Atmospheric Pressure: 1022.2 mbar
 Test mode: a: Typical configuration: DC12V Power supply network preview.
 b: Typical configuration: POE Power supply network preview.

7.2.3 Test Results:

Observations: Test Point:
 1. All insulated enclosure and seams.
 2. All accessible metal parts of the enclosure.
 3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	Pass
Air Discharge	2,4,8	-	1	Pass
Contact Discharge	6	+	2	Pass
Contact Discharge	6	-	2	Pass
Horizontal Coupling	6	+	3	Pass
Horizontal Coupling	6	-	3	Pass
Vertical Coupling	6	+	3	Pass
Vertical Coupling	6	-	3	Pass


Results:

- The EUT working normal, before the conditioning.
- Monitor the EUT during the conditioning period there was no status change has occurred, during the conditioning.
- No degradation in the performance of the EUT was observed, after the conditioning.

7.3 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-4:2012
Repetition Frequency: 100kHz
Burst Period: 300ms
Test Duration: 1 minute per level & polarity

7.3.1 Test Setup Diagram

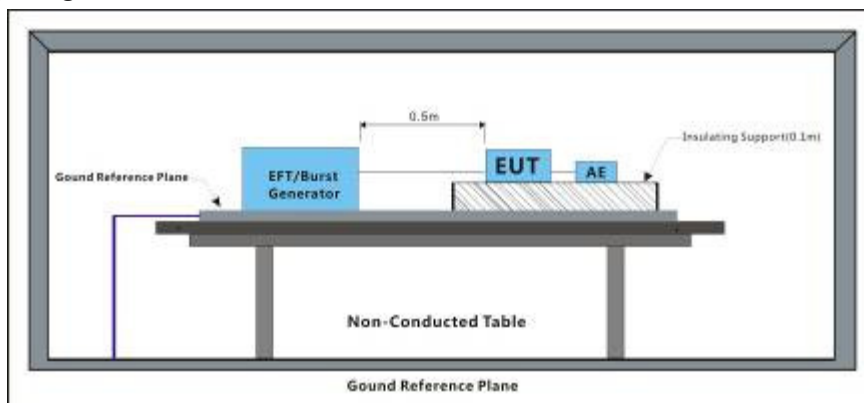

7.3.2 E.U.T. Operation

Operating Environment:
Temperature: 24 °C Humidity: 58 % RH Atmospheric Pressure: 1022.2 mbar
Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

7.3.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	Pass
AC power port	2	-	CDN	Pass


Results:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period there was no status change has occurred, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

7.4 Electrical Fast Transients/Burst at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-4:2012
Repetition Frequency: 100kHz
Burst Period: 300ms
Test Duration: 1 minute per level & polarity

7.4.1 Test Setup Diagram

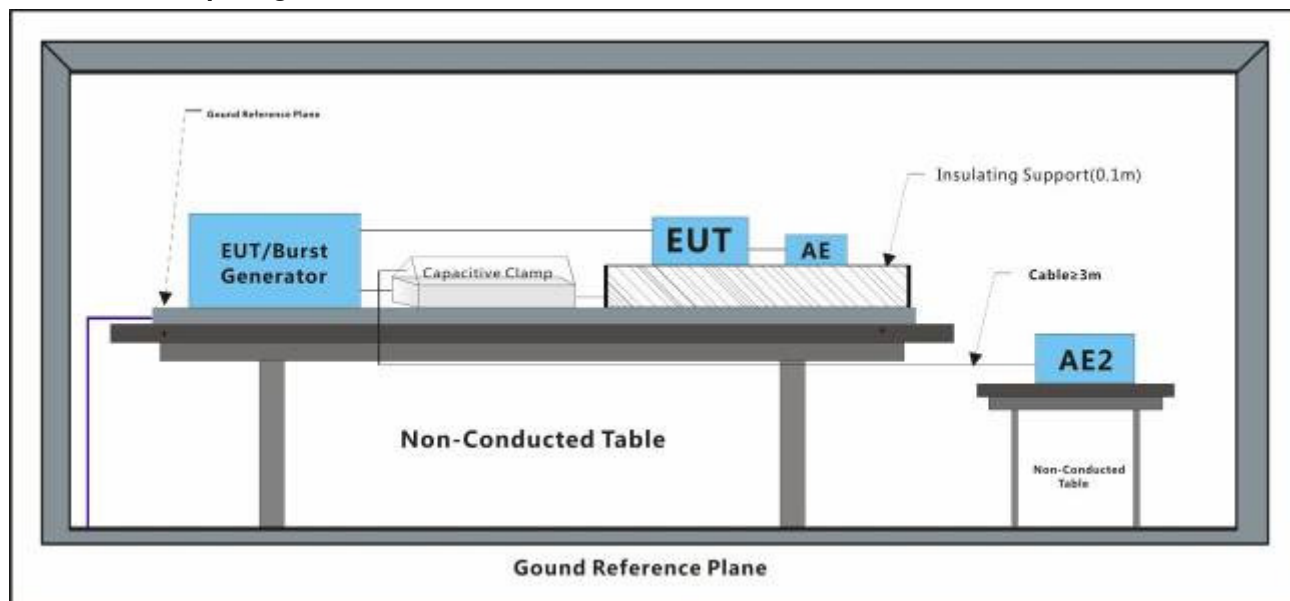

7.4.2 E.U.T. Operation

Operating Environment:
Temperature: 24 °C Humidity: 58 % RH Atmospheric Pressure: 1022.2 mbar
Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

7.4.3 Test Results:

Port	Level (kV)	Polarity	CDN/Clamp	Result / Observations
Signal port	1	+	Clamp	Pass
Signal port	1	-	Clamp	Pass


Results:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period there was no status change has occurred, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

7.5 Surge at Power Port

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-5:2014
Interval: 60s between each surge
No. of surges: 5 positive, 5 negative

7.5.1 Test Setup Diagram

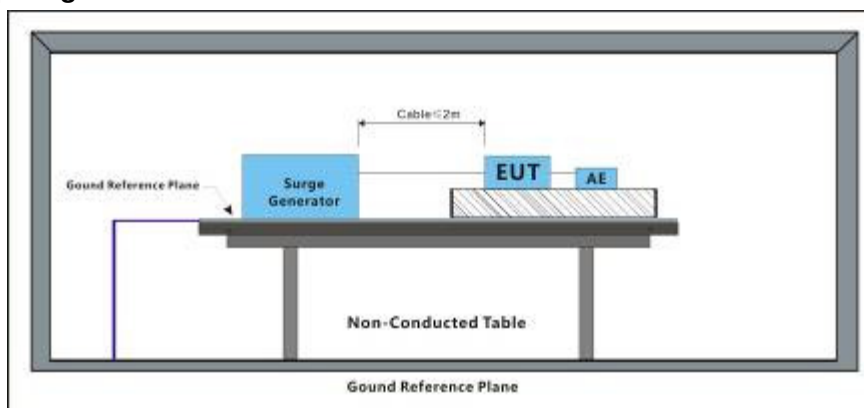

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1022.2 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

7.5.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	0.5,1	+	0°	Pass
L-N	0.5,1	-	0°	Pass
L-N	0.5,1	+	90°	Pass
L-N	0.5,1	-	90°	Pass
L-N	0.5,1	+	180°	Pass
L-N	0.5,1	-	180°	Pass
L-N	0.5,1	+	270°	Pass
L-N	0.5,1	-	270°	Pass
L-PE	0.5,1,2	+	0°	Pass
L-PE	0.5,1,2	-	0°	Pass
L-PE	0.5,1,2	+	90°	Pass
L-PE	0.5,1,2	-	90°	Pass
L-PE	0.5,1,2	+	180°	Pass
L-PE	0.5,1,2	-	180°	Pass
L-PE	0.5,1,2	+	270°	Pass
L-PE	0.5,1,2	-	270°	Pass
N-PE	0.5,1,2	+	0°	Pass
N-PE	0.5,1,2	-	0°	Pass
N-PE	0.5,1,2	+	90°	Pass
N-PE	0.5,1,2	-	90°	Pass
N-PE	0.5,1,2	+	180°	Pass
N-PE	0.5,1,2	-	180°	Pass



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM190201107201

Page: 43 of 80

N-PE	0.5,1,2	+	270°	Pass
N-PE	0.5,1,2	-	270°	Pass

Results:


1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period there was no status change has occurred, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

7.6 Surge at Signal Port

Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-5:2014

7.6.1 Test Setup Diagram

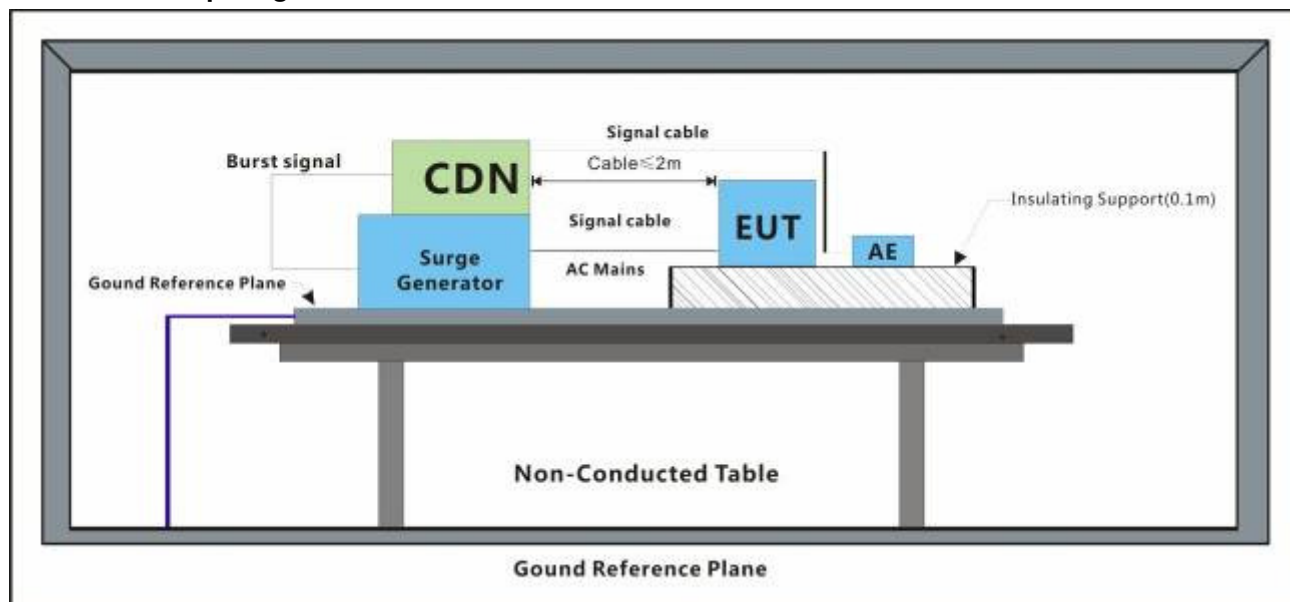

7.6.2 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1022.2 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.

b: Typical configuration: POE Power supply network preview.

7.6.3 Test Results:

Port	Line	Level (kV)	Polarity	Result / Observations
Signal port	Line-Ground	0.5	+	Pass
Signal port	Line-Ground	0.5	-	Pass
Signal port	Line-Ground	1	+	Pass
Signal port	Line-Ground	1	-	Pass


Results:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period there was no status change has occurred, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.

7.7 Voltage Dips and Interruptions

Test Requirement: EN 50130-4:2011 +A1:2014
 Test Method: EN 61000-4-11:2004
 Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods; 40% of UT for 10 Periods;
 70% of UT for 25 Periods; 80% of UT for 250 Periods;
 No. of Dips / Interruptions: 3 per Level
 Time between dropout 10s

7.7.1 Test Setup Diagram

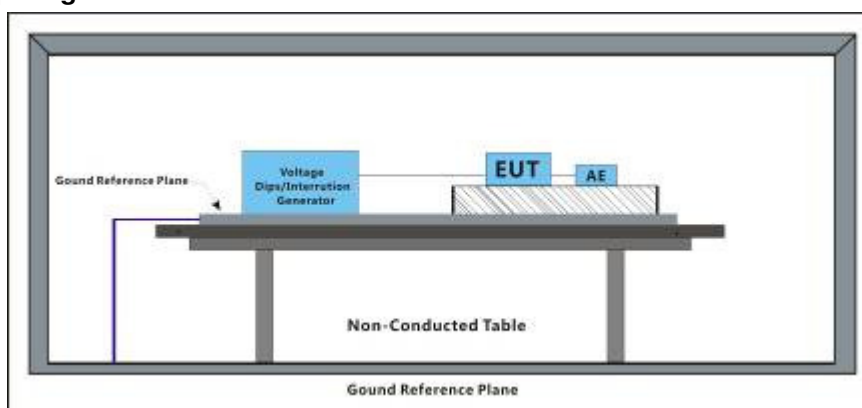

7.7.2 E.U.T. Operation

Operating Environment:
 Temperature: 24 °C Humidity: 58 % RH Atmospheric Pressure: 1012.5 mbar
 Test mode: a: Typical configuration: DC12V Power supply network preview.
 b: Typical configuration: POE Power supply network preview.

7.7.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
80	0°	250 Cycles	3	Pass
80	180°	250 Cycles	3	Pass
70	0°	25 Cycles	3	Pass
70	180°	25 Cycles	3	Pass
40	0°	10 Cycles	3	Pass
40	180°	10 Cycles	3	Pass
0	0°	250 Cycles	3	Pass
0	180°	250 Cycles	3	Pass


Results:

- The EUT working normal, before the conditioning.
- Monitor the EUT during the conditioning period :
 80%UT Lasts for 250 cycles: During the test, No degradation in the performance of the EUT was observed
 70%UT Lasts for 25 cycles: During the test, No degradation in the performance of the EUT was observed
 40%UT Lasts for 10 cycles: During the test, No degradation in the performance of the EUT was observed
 0%UT Lasts for 250 cycles: During the test , the Sample restart, after the test , all the functions recovery automatically
- No degradation in the performance of the EUT was observed, after the conditioning.

7.8 Mains Supply Voltage Variations-Conditioning

Test Requirement:	EN 50130-4:2011 +A1:2014
Test Method:	EN 50130-4:2011+A1:2014
Voltage max.:	AC 264V (U_{max} : $U_{nom} + 10\%$)
Voltage min.:	AC 85V (U_{min} : $U_{nom} - 15\%$)
U_{nom} Voltage:	AC 230V

7.8.1 Test Setup Diagram

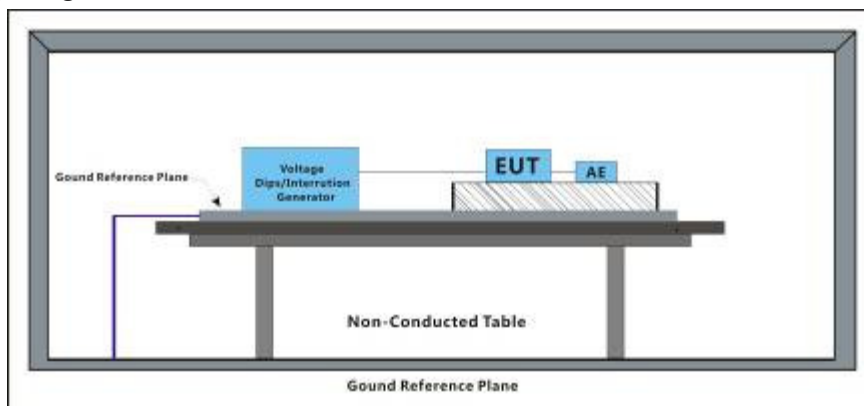

7.8.2 E.U.T. Operation

Operating Environment:			
Temperature:	25 °C	Humidity:	58 % RH Atmospheric Pressure: 1012.5 mbar
Test mode:	a: Typical configuration: DC12V Power supply network preview.		
	b: Typical configuration: POE Power supply network preview.		

7.8.3 Test Results:

Test phenomenon description for the EUT:

1. The EUT working normal, before the conditioning.
2. Monitor the EUT during the conditioning period and detected no any changes in states, during the conditioning.
3. No degradation in the performance of the EUT was observed, after the conditioning.


7.9 Radiated Immunity(80MHz-2.7GHz)

Test Requirement: EN 50130-4:2011 +A1:2014

Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010

Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

7.9.1 Test Setup Diagram

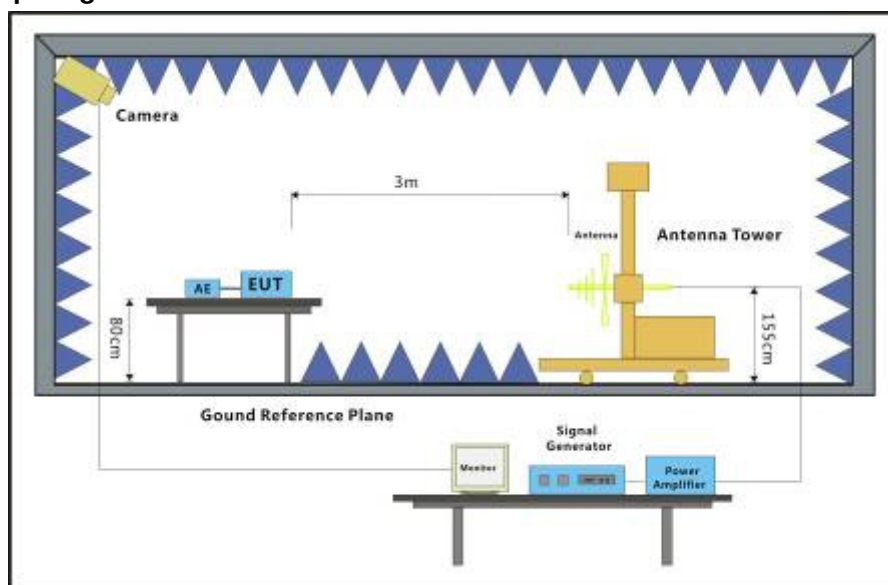

7.9.2 E.U.T. Operation

Operating Environment:

Temperature: 21.3 °C Humidity: 49 % RH Atmospheric Pressure: 1020.2 mbar

Test mode: a: Typical configuration: DC12V Power supply network preview.

b: Typical configuration: POE Power supply network preview.

7.9.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2.7GHz	10	Front/ Back/ Left/ Right/ Top/ Underside	3s	Pass
80MHz-2.7GHz	3	Front/ Back/ Left/ Right/ Top/ Underside	3s	Pass
80MHz-2.7GHz	1	Front/ Back/ Left/ Right/ Top/ Underside	3s	Pass

Results:

1. The EUT working normal, before the conditioning.

2. Monitor the EUT during the conditioning period:

10V/M: During the test, No degradation in the performance of the EUT was observed

3V/M: During the test, No degradation in the performance of the EUT was observed


1V/M: During the test, No degradation in the performance of the EUT was observed

3. No degradation in the performance of the EUT was observed, after the conditioning.

7.10 Conducted Immunity at Power Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-6:2014
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

7.10.1 Test Setup Diagram

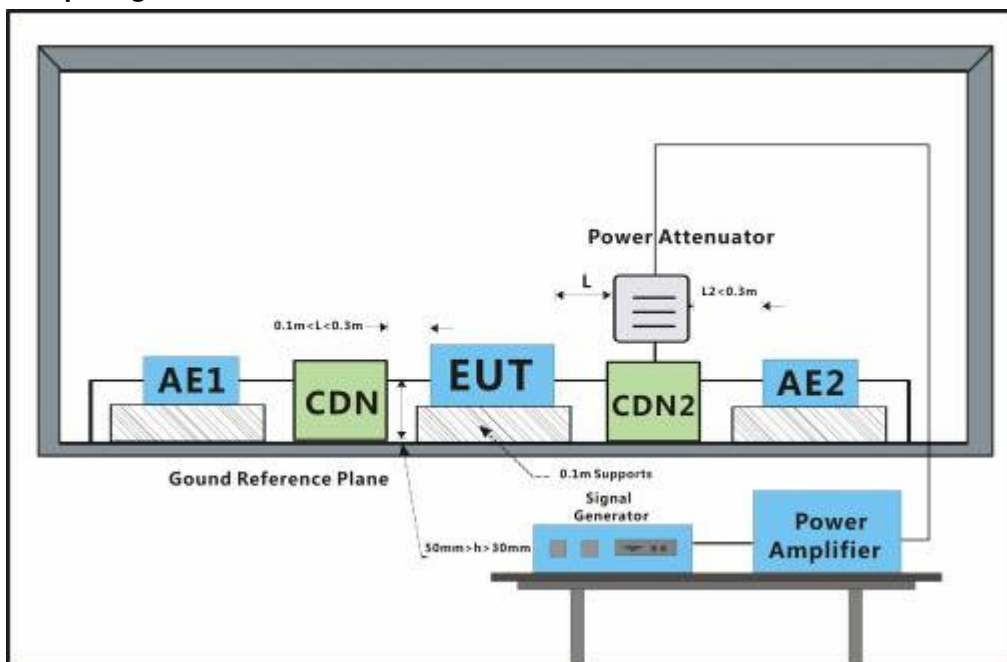

7.10.2 E.U.T. Operation

Operating Environment:
Temperature: 21.4 °C Humidity: 47 % RH Atmospheric Pressure: 1021.2 mbar
Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

7.10.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	Pass
AC power port	3	CDN	3s	Pass
AC power port	1	CDN	3s	Pass


Results:

- The EUT working normal, before the conditioning.
- Monitor the EUT during the conditioning period:
 - 10V: During the test, no degradation in the performance of the EUT was observed.
 - 3V: During the test, no degradation in the performance of the EUT was observed.
 - 1V: During the test, no degradation in the performance of the EUT was observed.
- No degradation in the performance of the EUT was observed, after the conditioning.

7.11 Conducted Immunity at Signal Port (150kHz-100MHz)

Test Requirement: EN 50130-4:2011 +A1:2014
Test Method: EN 61000-4-6:2014
Modulation: 80%, 1 kHz Amplitude Modulation & 0.5s ON 0.5s OFF Pulse Modulation

7.11.1 Test Setup Diagram

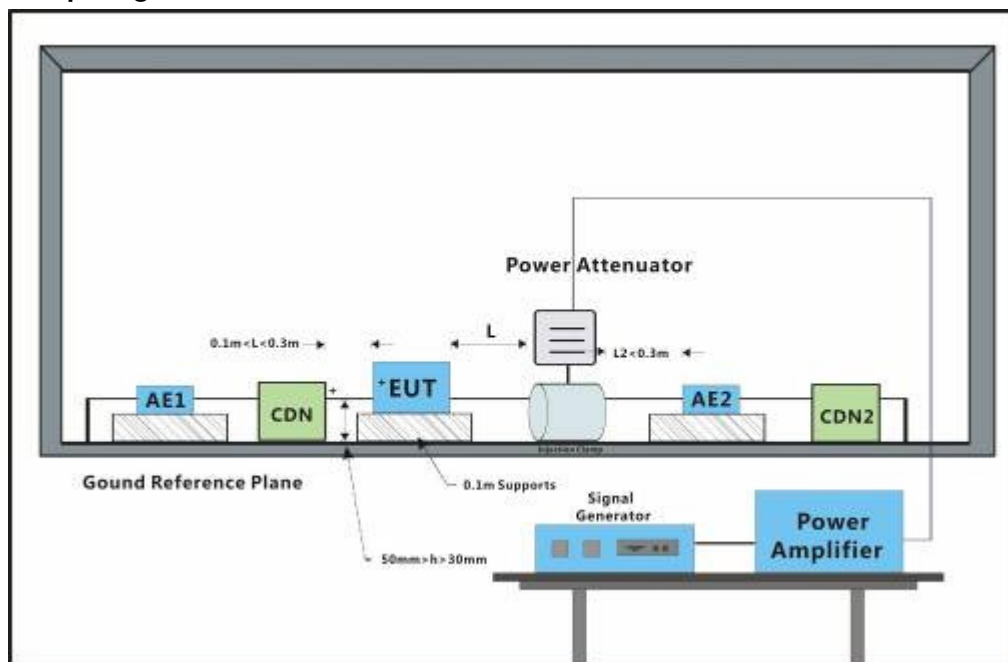

7.11.2 E.U.T. Operation

Operating Environment:
Temperature: 21.4 °C Humidity: 47 % RH Atmospheric Pressure: 1021.2 mbar
Test mode: a: Typical configuration: DC12V Power supply network preview.
b: Typical configuration: POE Power supply network preview.

7.11.3 Test Results:

Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
Signal port	10	Clamp	3s	Pass ¹⁾
Signal port	3	Clamp	3s	Pass ²⁾
Signal port	1	Clamp	3s	Pass*

Results:

- The EUT working normal, before the conditioning.
- Monitor the EUT during the conditioning period:

TVI Video out:

10V: During the test, no degradation in the performance of the EUT was observed.

3V: During the test, no degradation in the performance of the EUT was observed

1V: During the test, no degradation in the performance of the EUT was observed

- No degradation in the performance of the EUT was observed, after the conditioning.

8 Photographs


8.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup









8.2 Asymmetric Mode Conducted Emissions (150kHz-30MHz) Test Setup



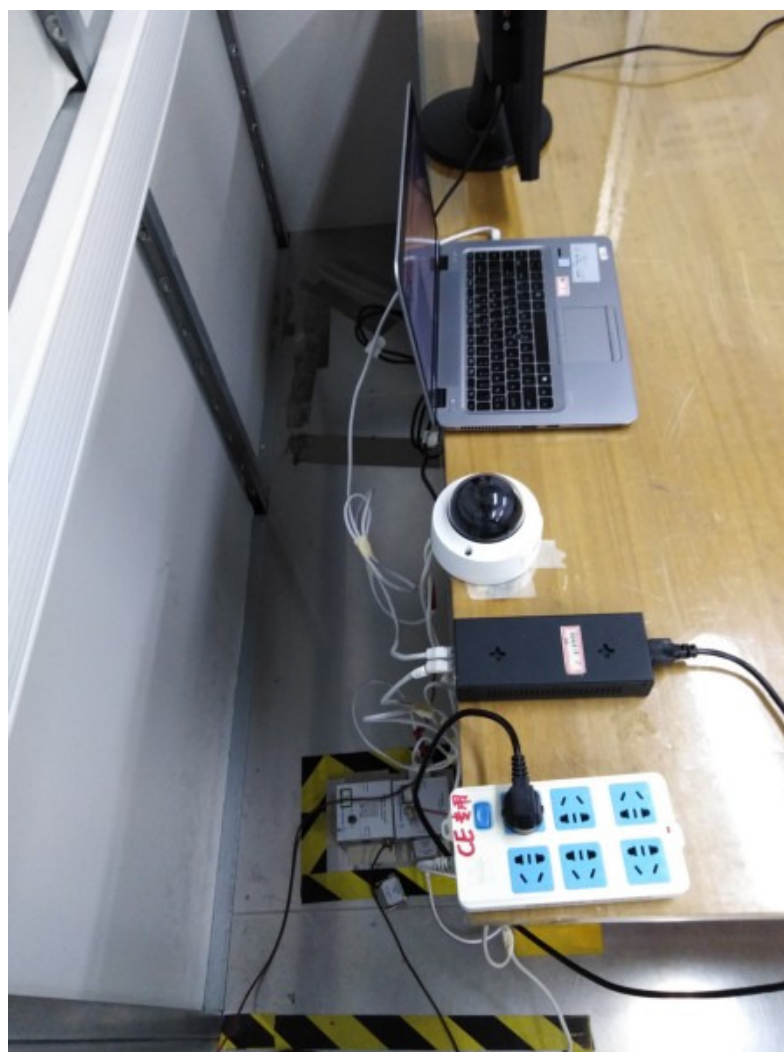



8.3 Radiated Emissions (30MHz-1GHz) Test Setup

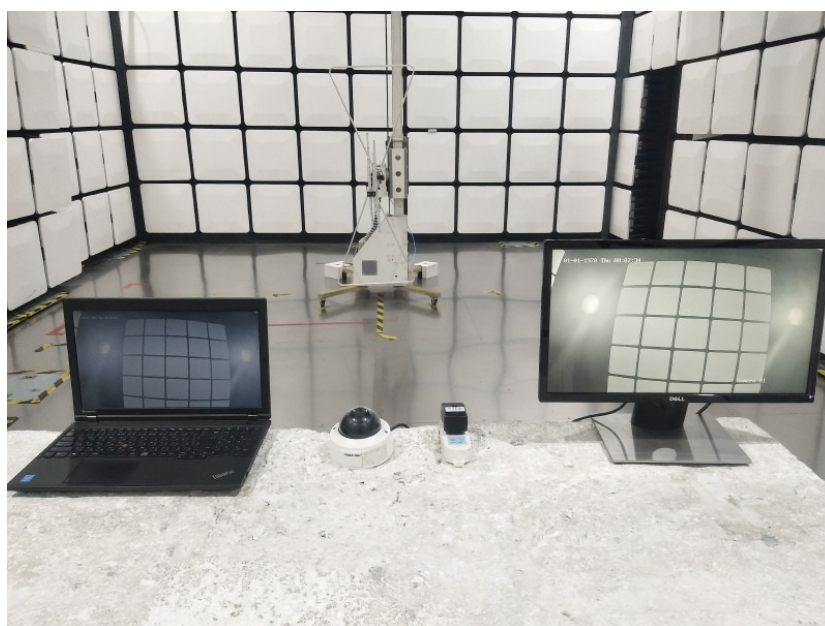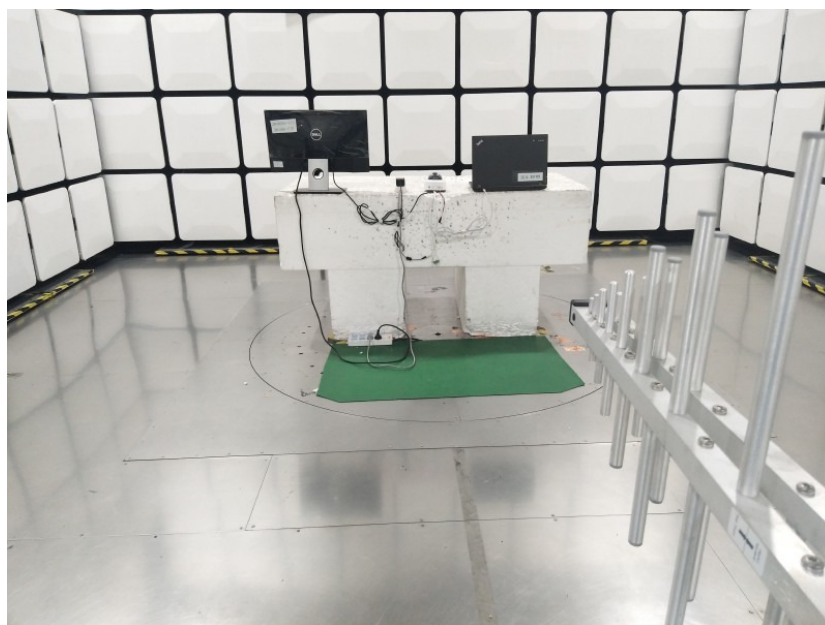

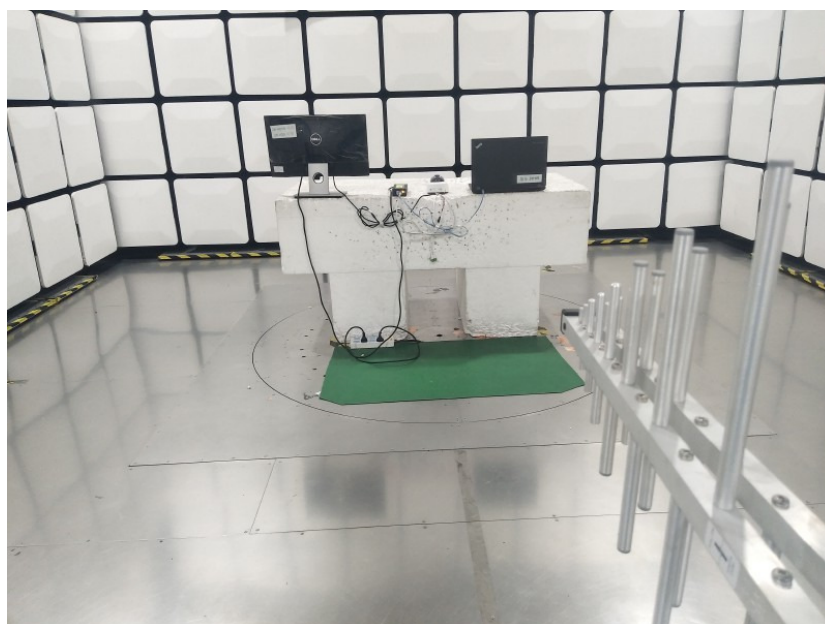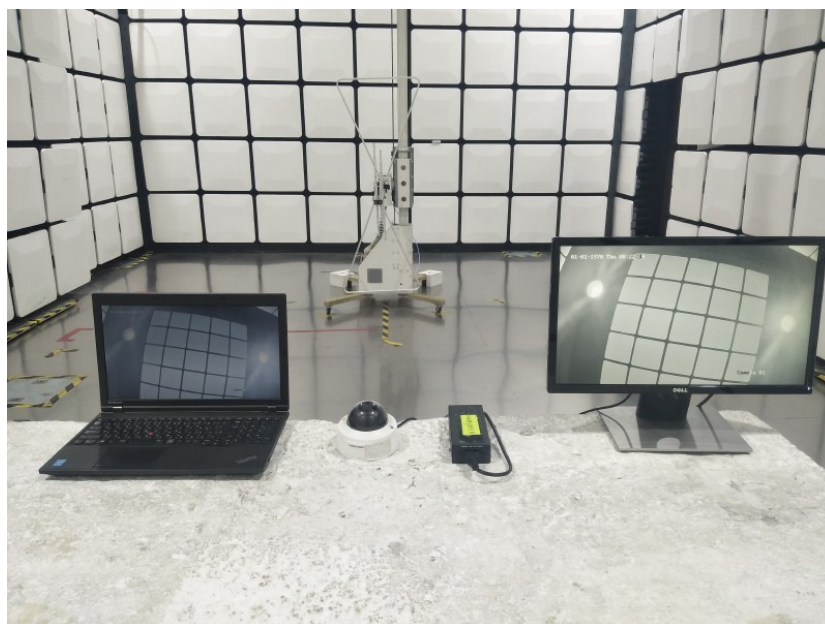


8.4 Radiated Emissions (above 1GHz) Test Setup


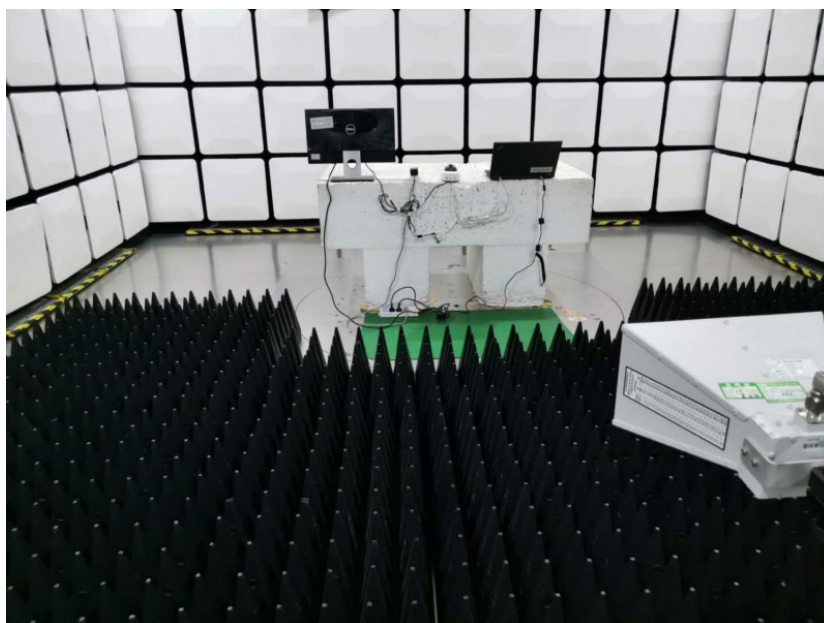


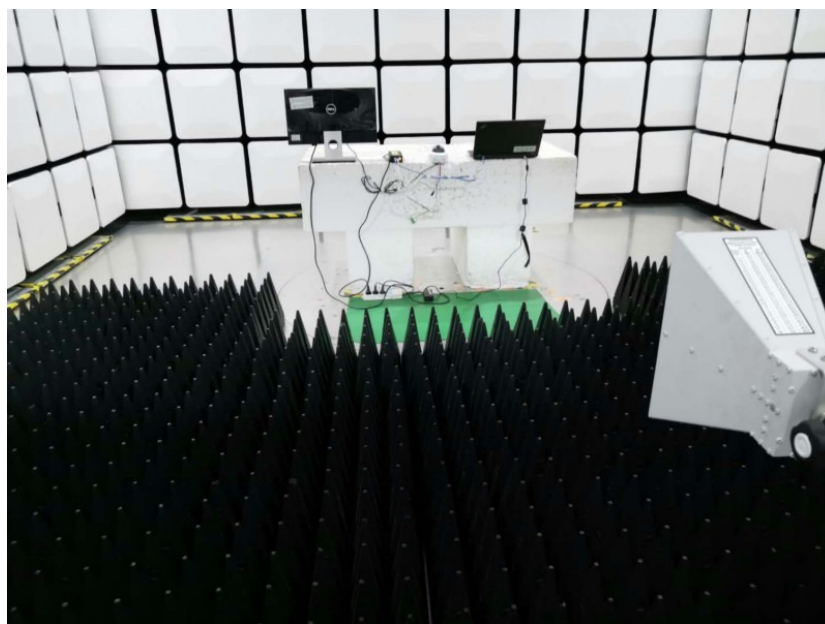



8.5 Voltage Fluctuations and Flicker Test Setup


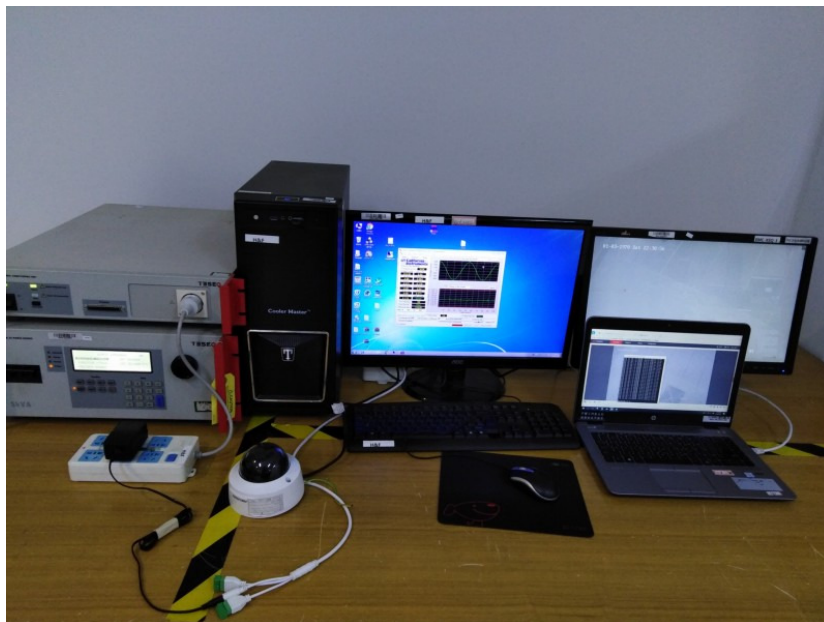


8.6 Electrostatic Discharge Test Setup

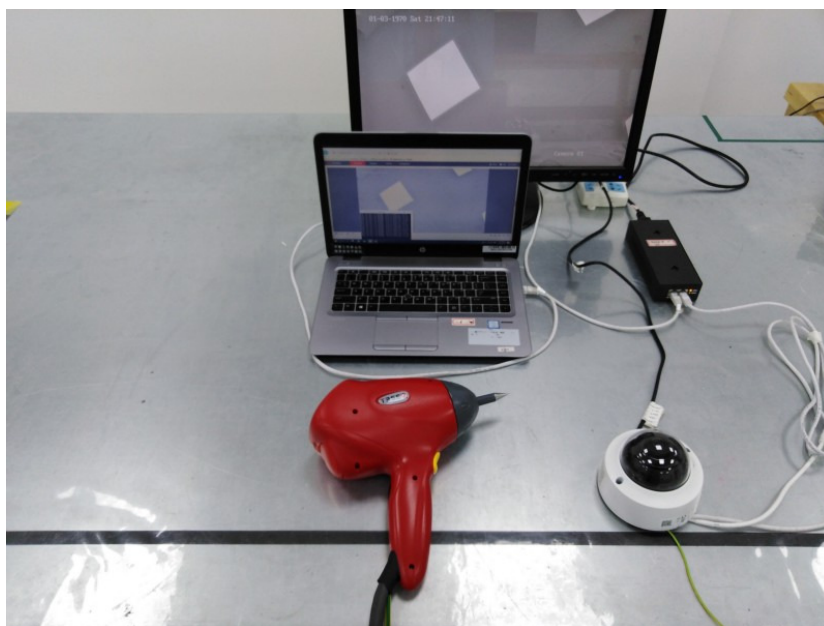
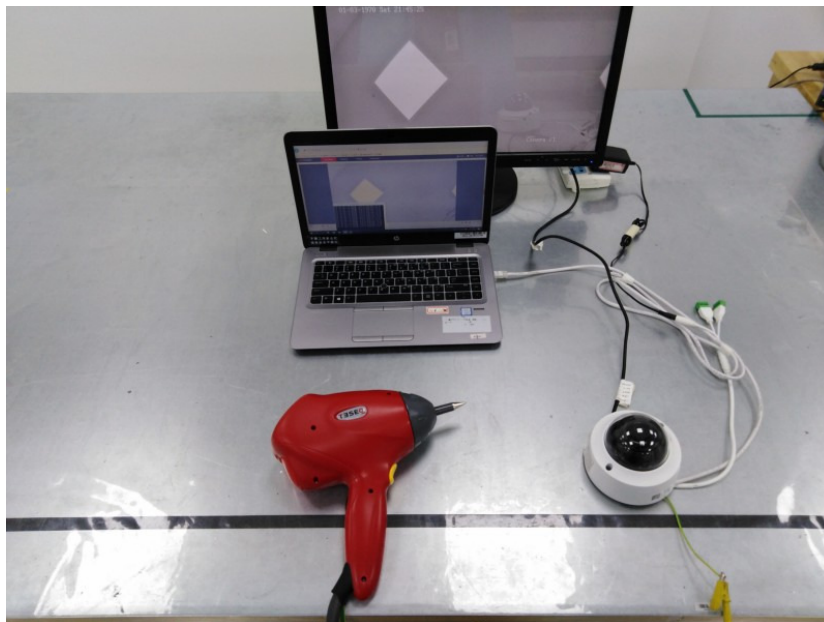


8.7 Radiated Immunity (80MHz-2.7GHz) Test Setup

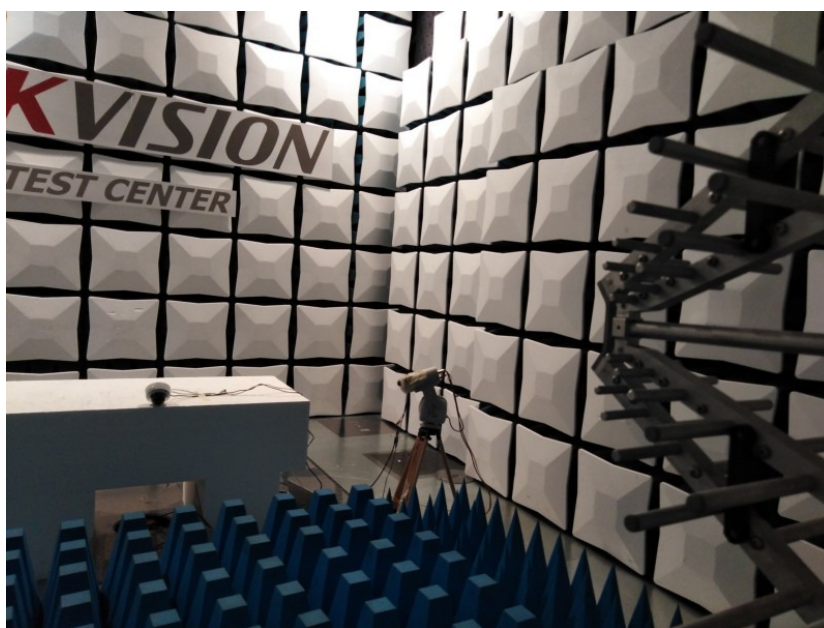
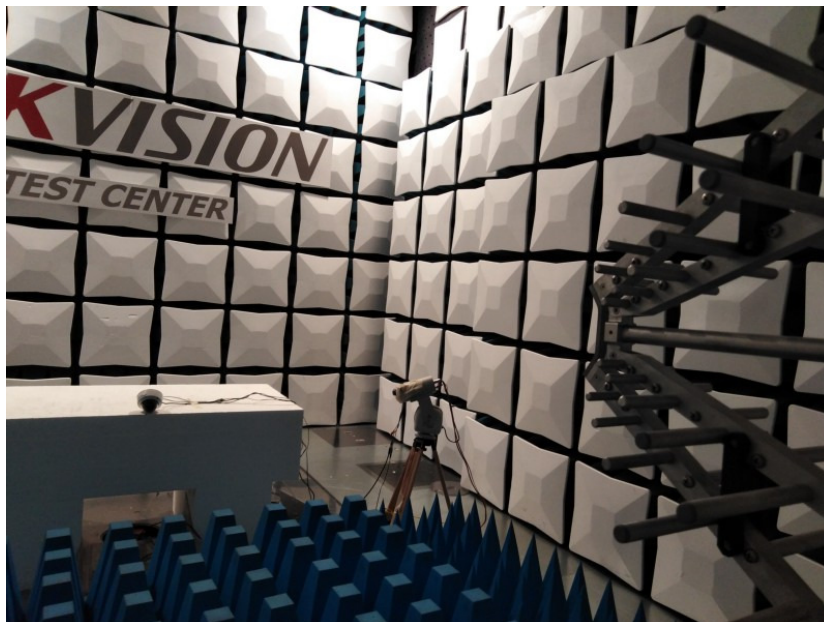


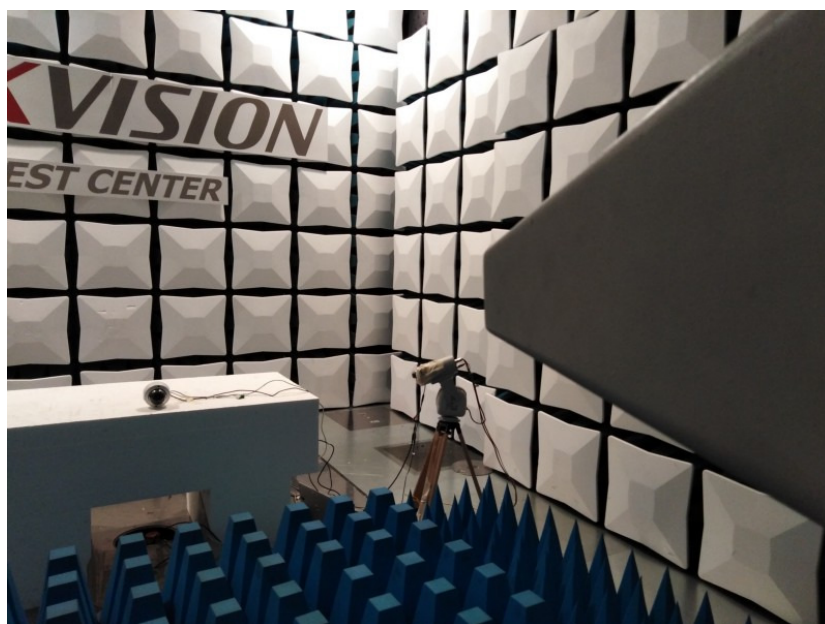
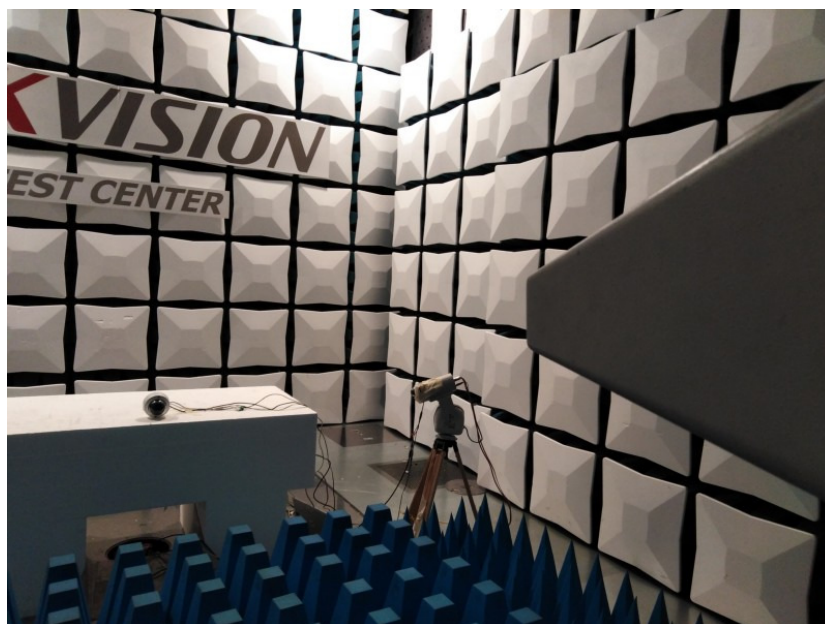




8.8 Electrical Fast Transients/Burst at Power Port Test Setup

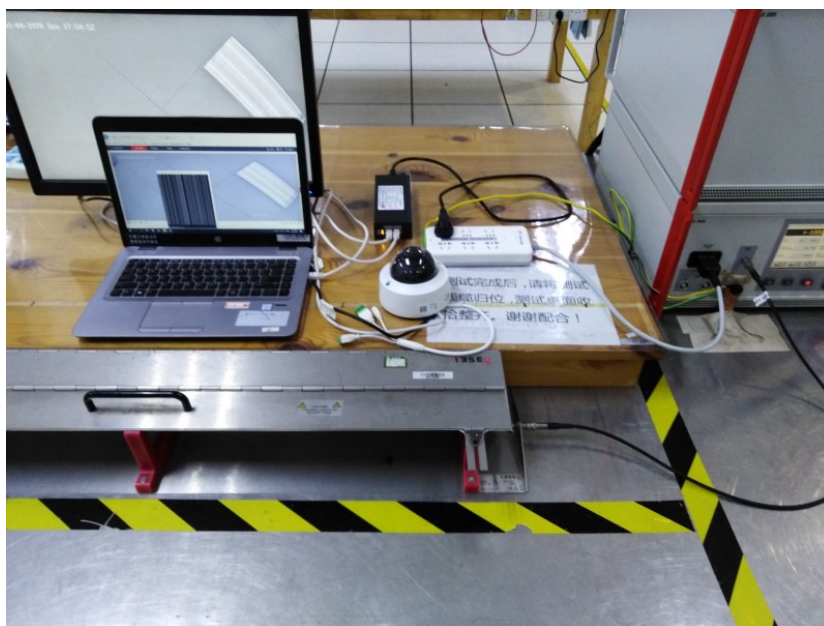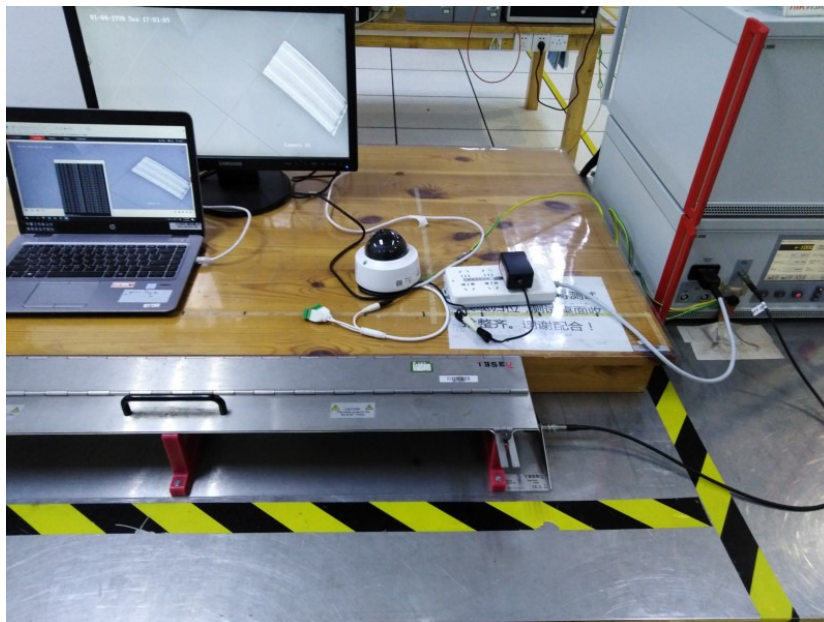



8.9 Electrical Fast Transients/Burst at Signal Port Test Setup

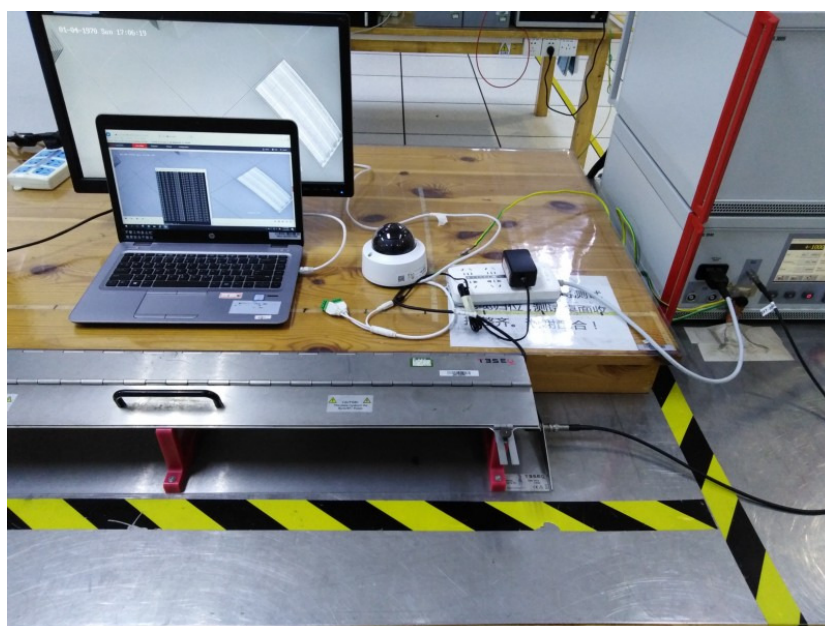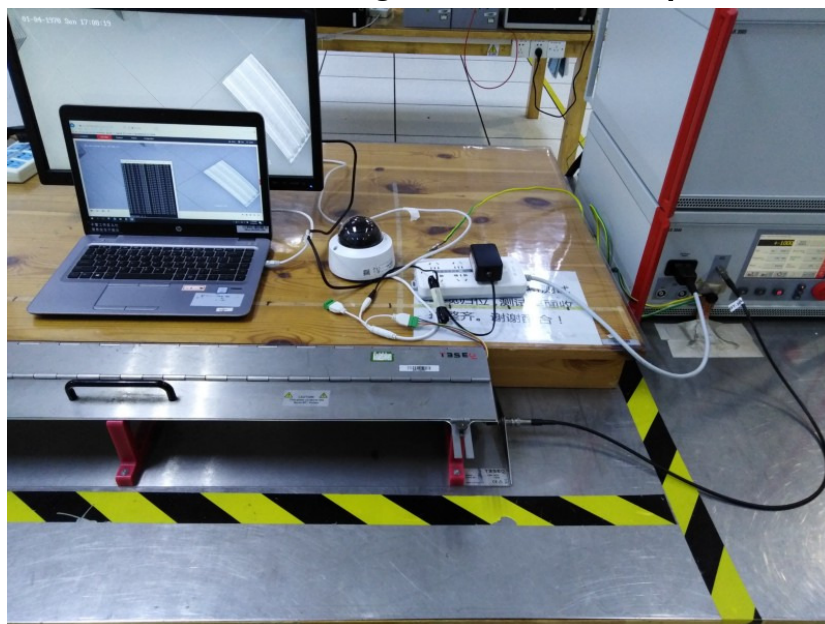

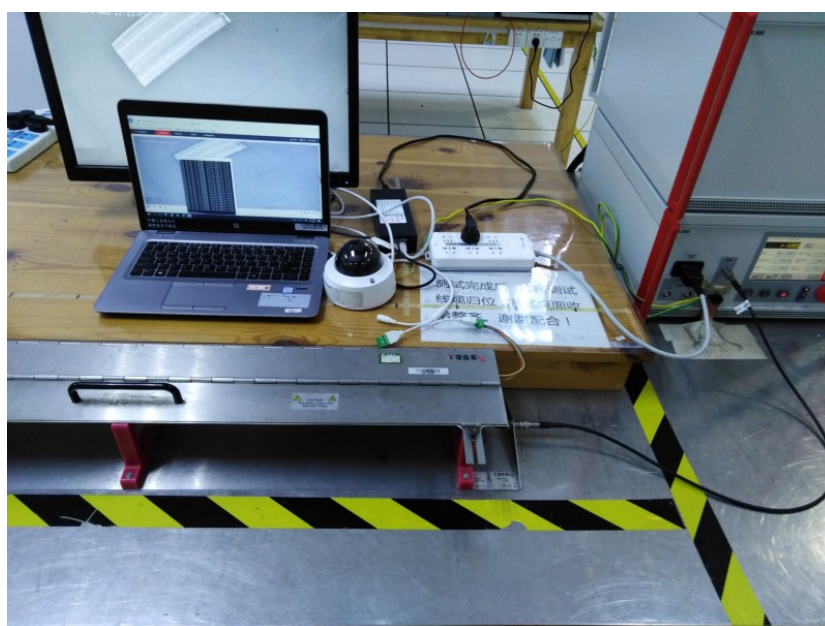
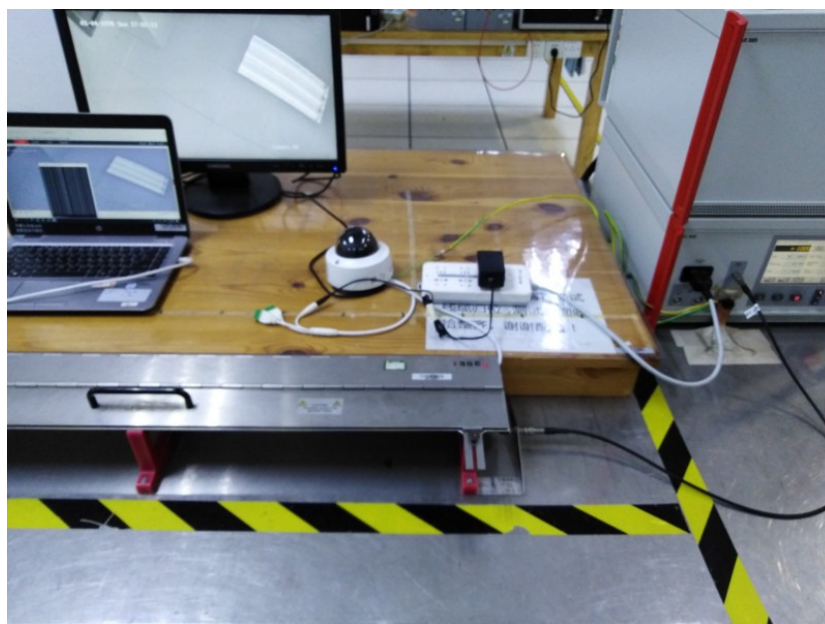


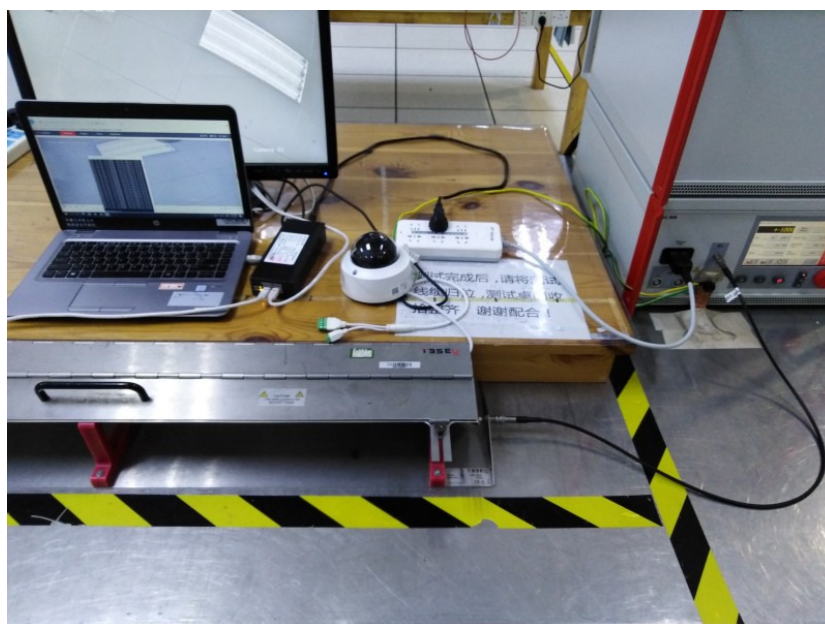
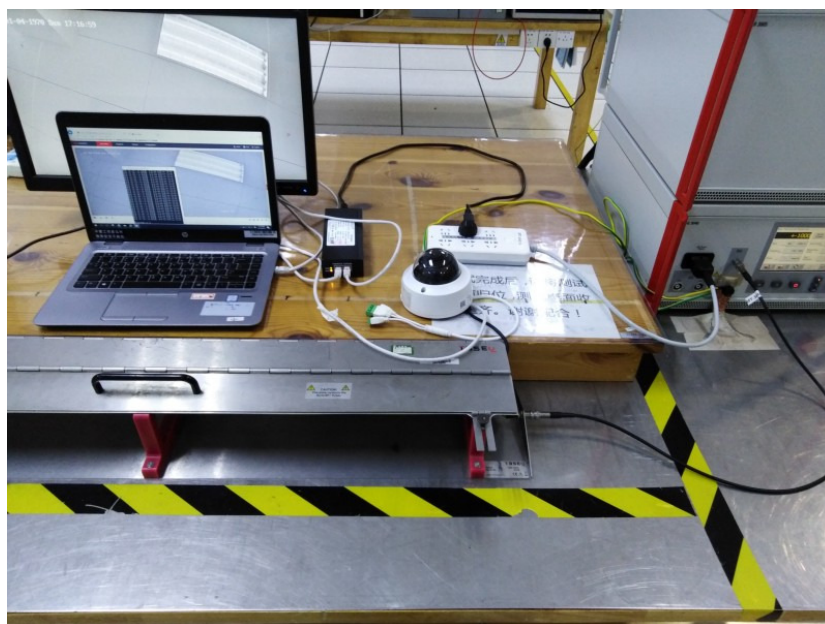


8.10 Surge at Power Port Test Setup

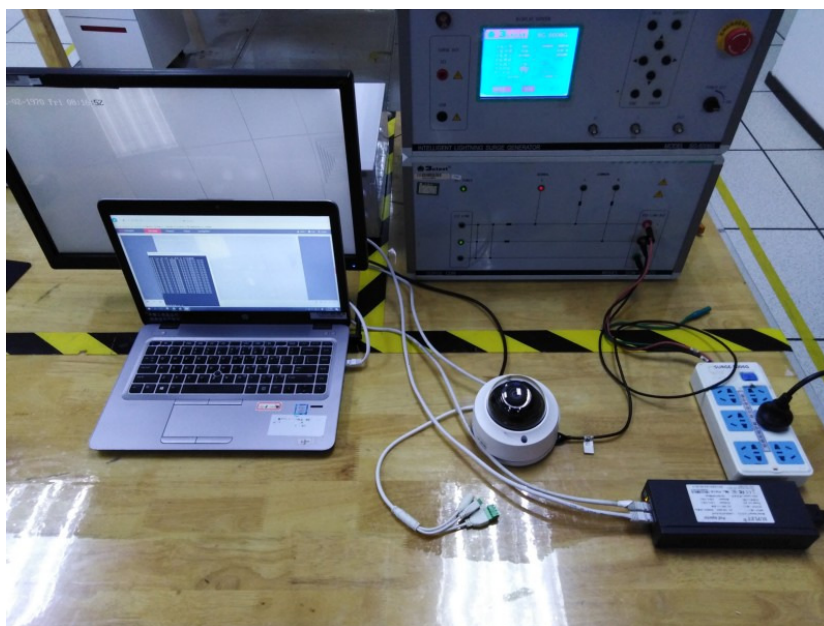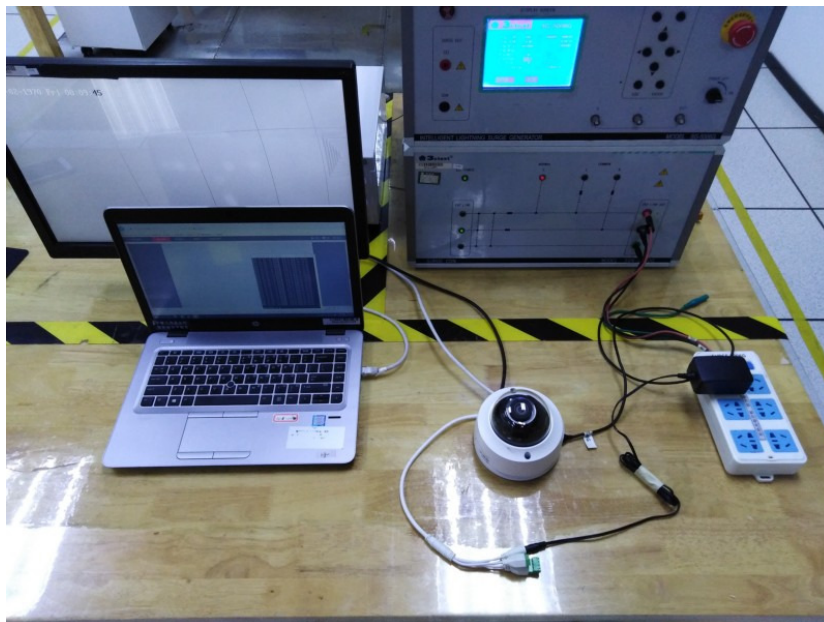


8.11 Surge at Signal Port Test Setup

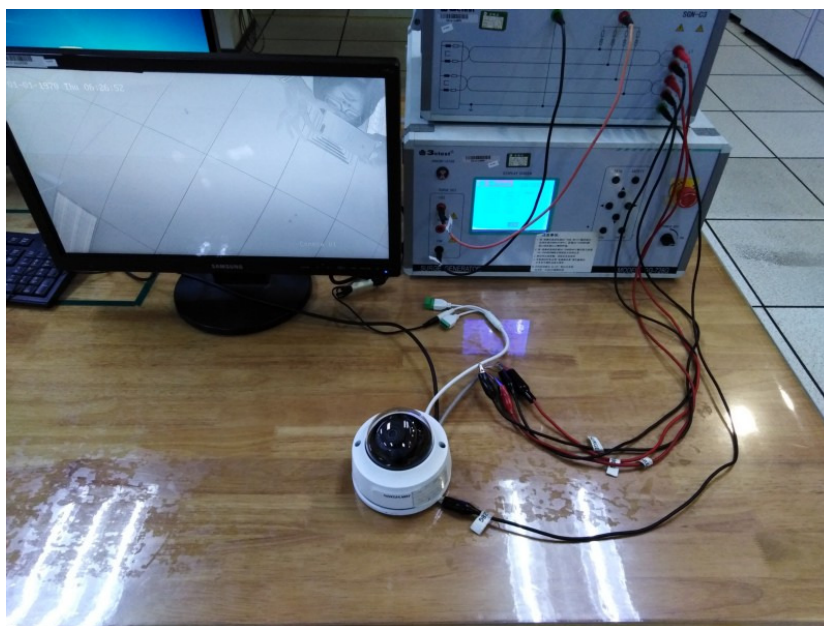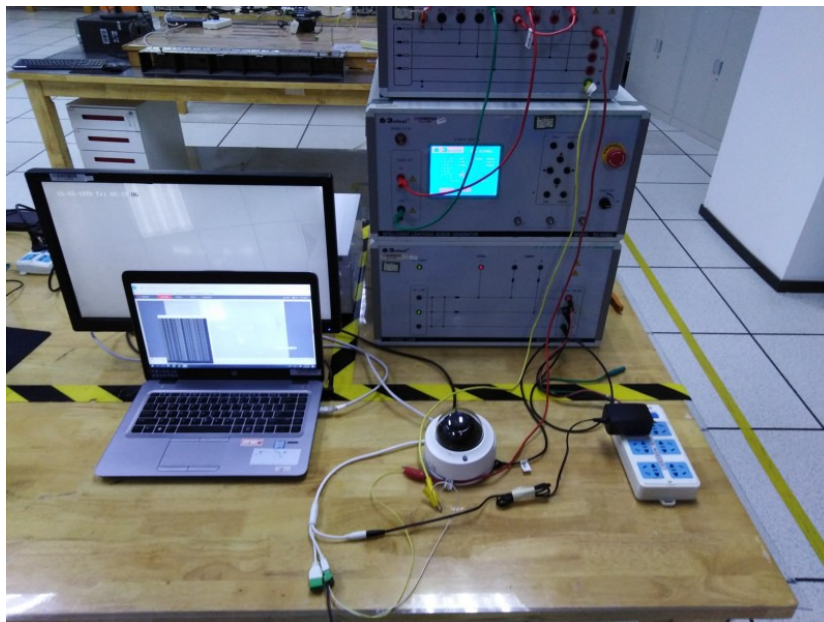


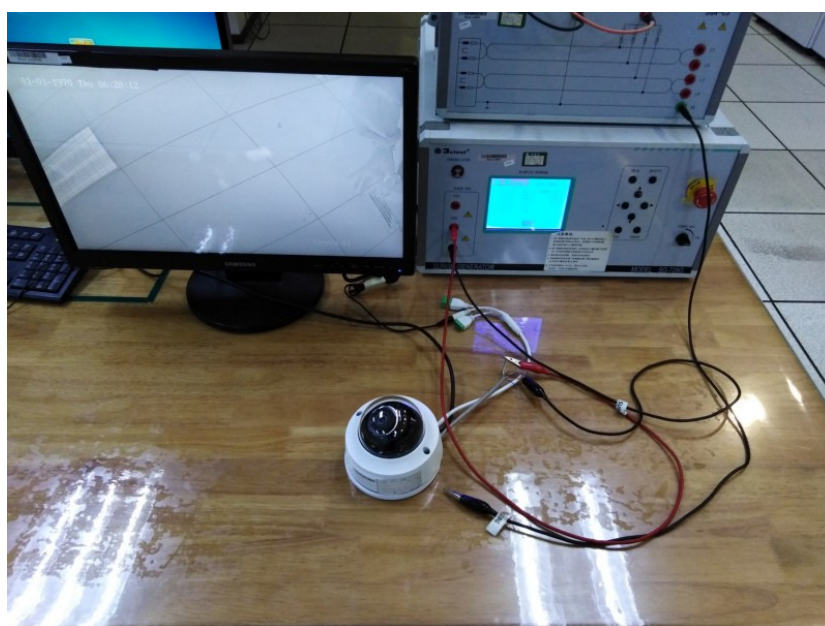
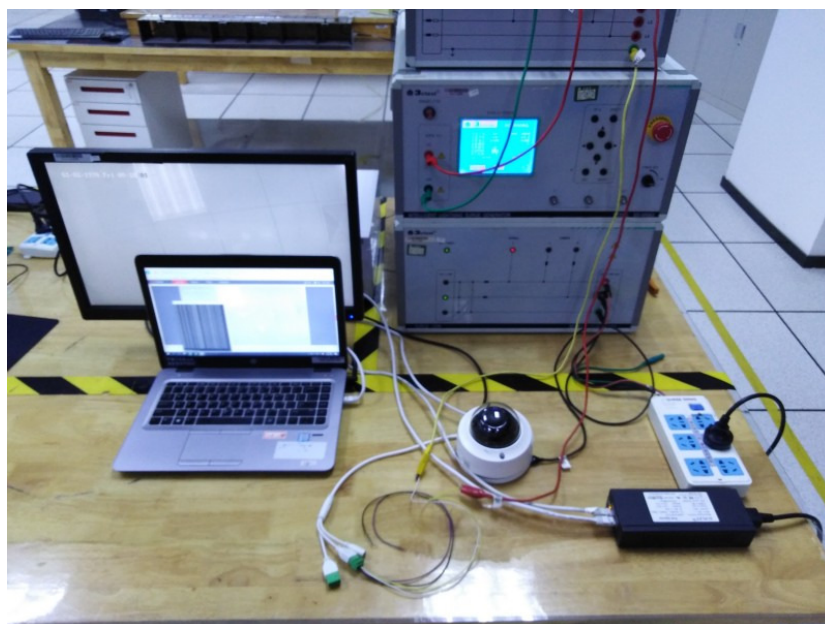



8.12 Conducted Immunity at Power Port (150kHz-100MHz) Test Setup

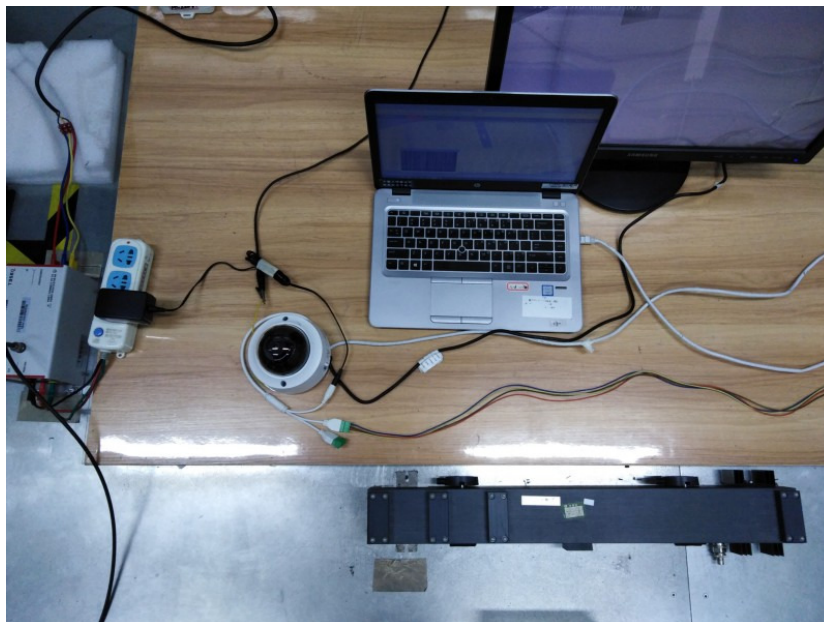



8.13 Conducted Immunity at Signal Port (150kHz-100MHz) Test Setup

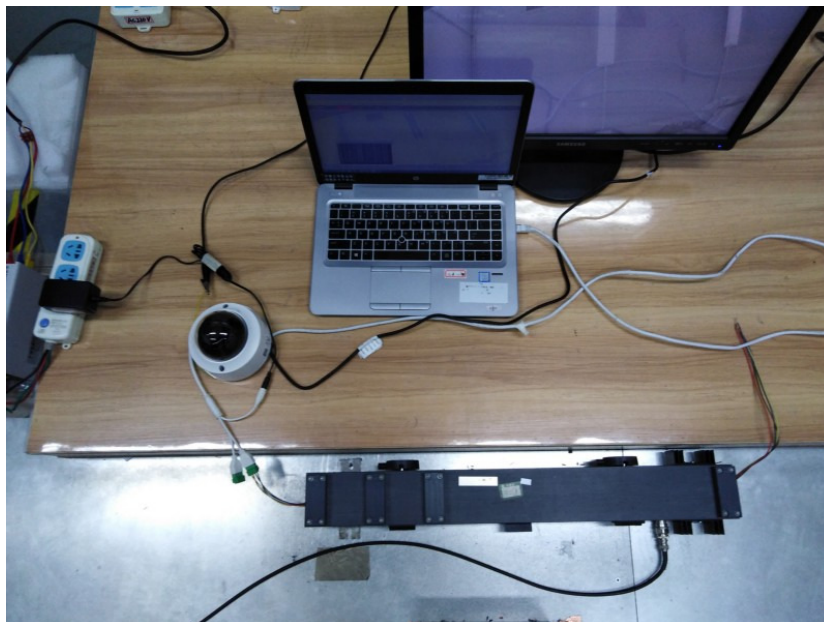

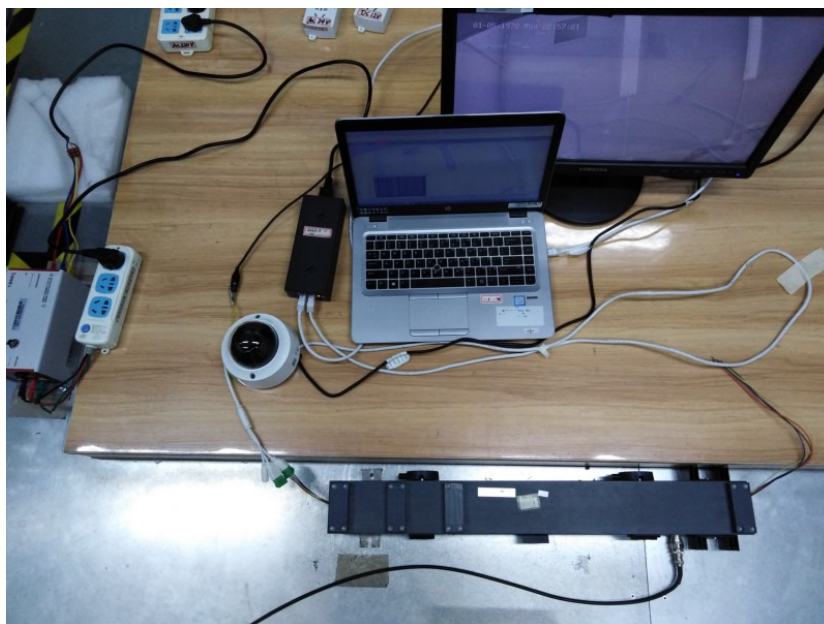
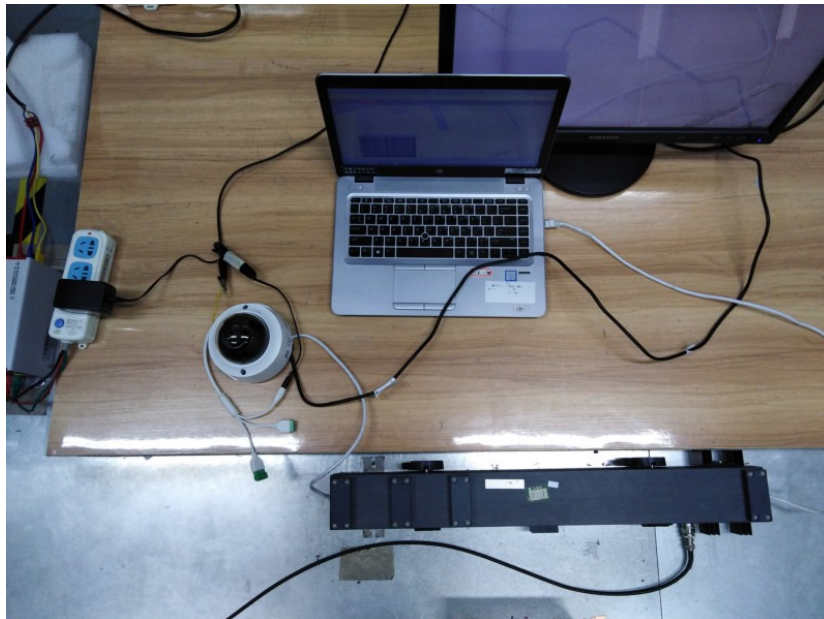


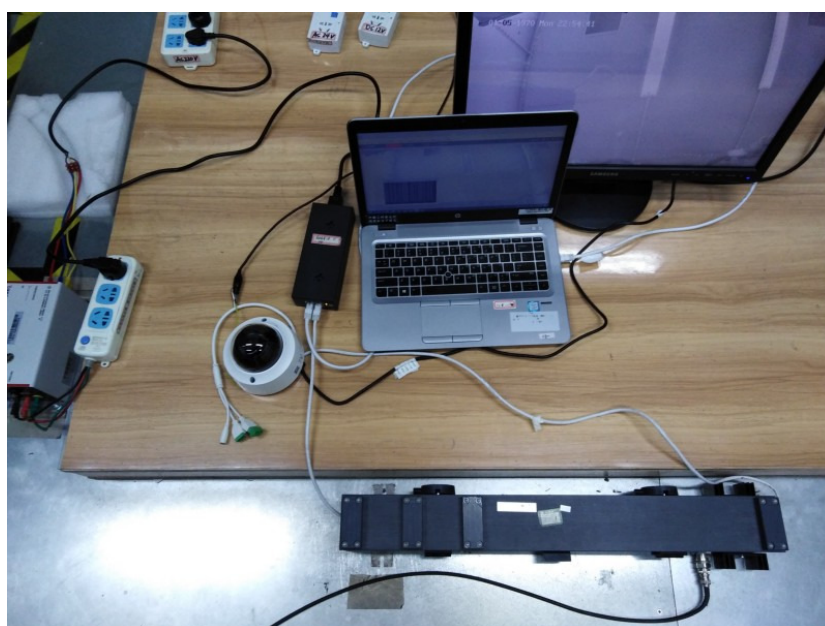



8.14 Voltage Dips and Interruptions Test Setup

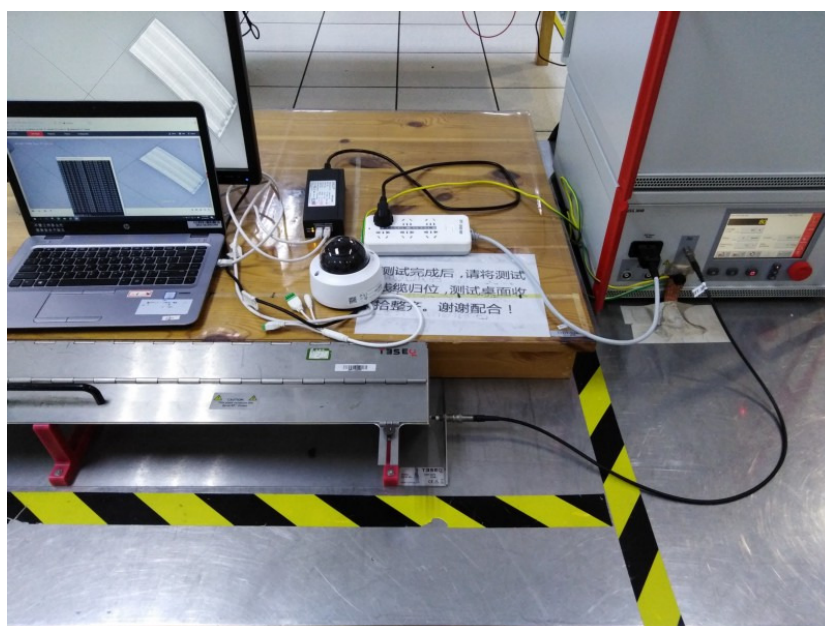
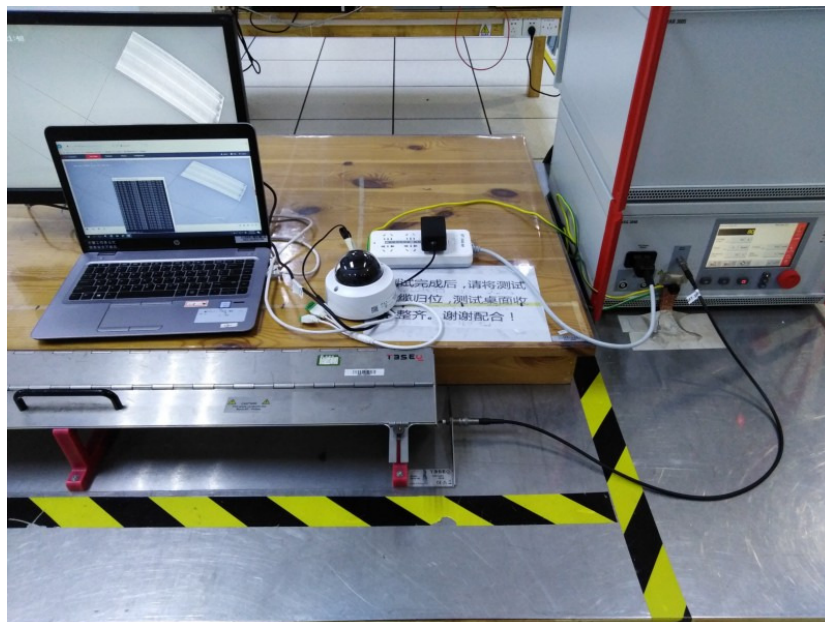



8.15 Mains Supply Voltage Variations-Conditioning Test Setup

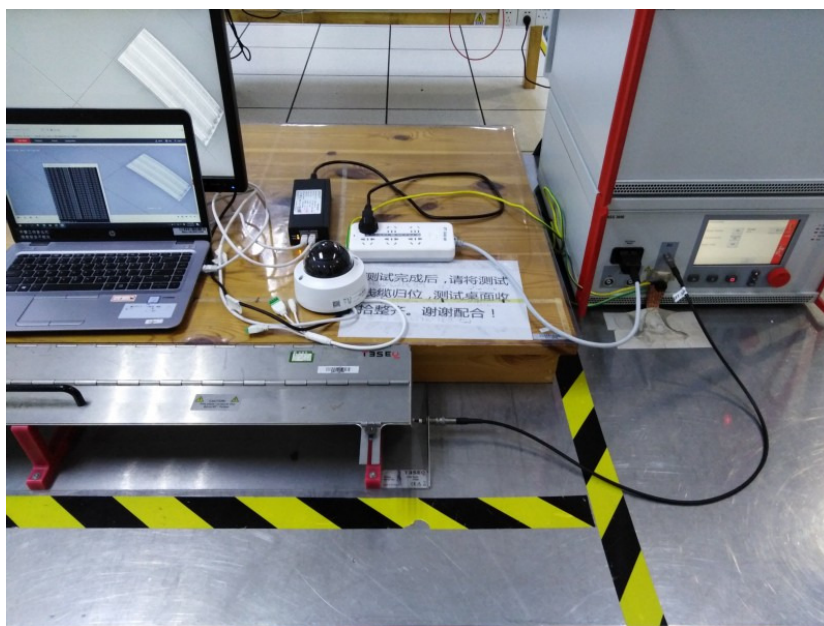
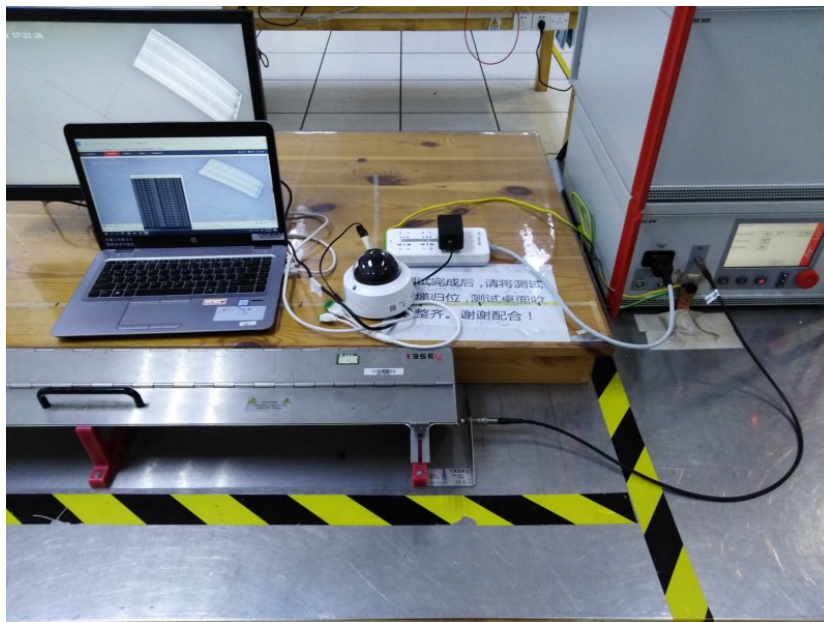




8.16 EUT Constructional Details (EUT Photos)

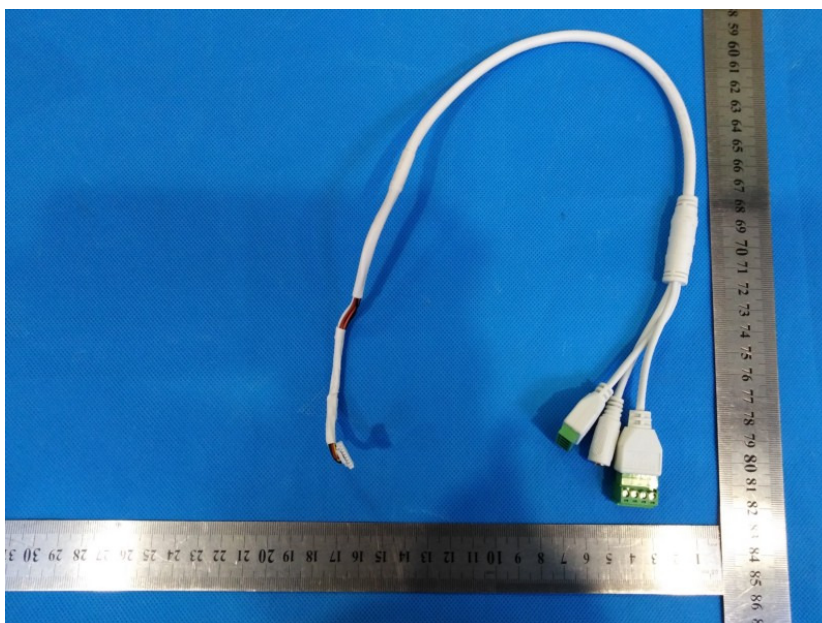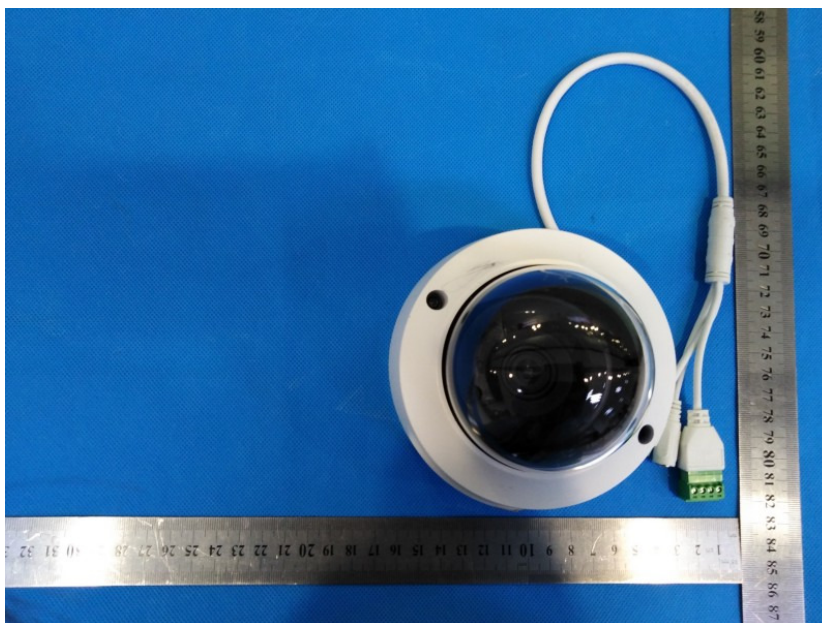


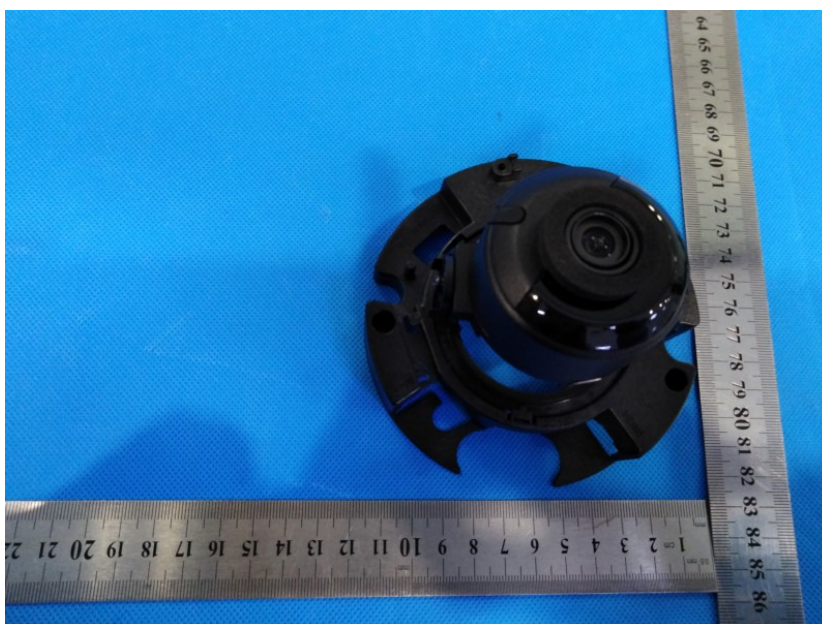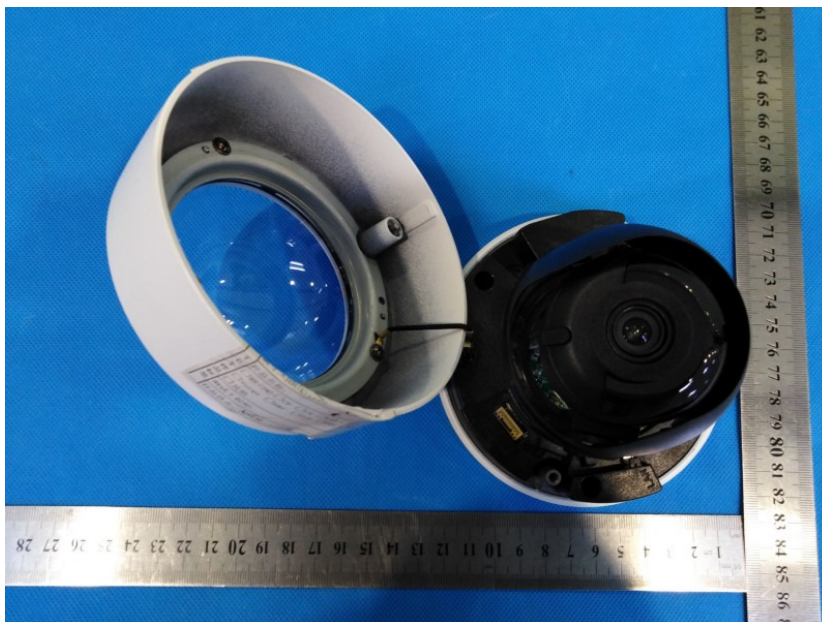

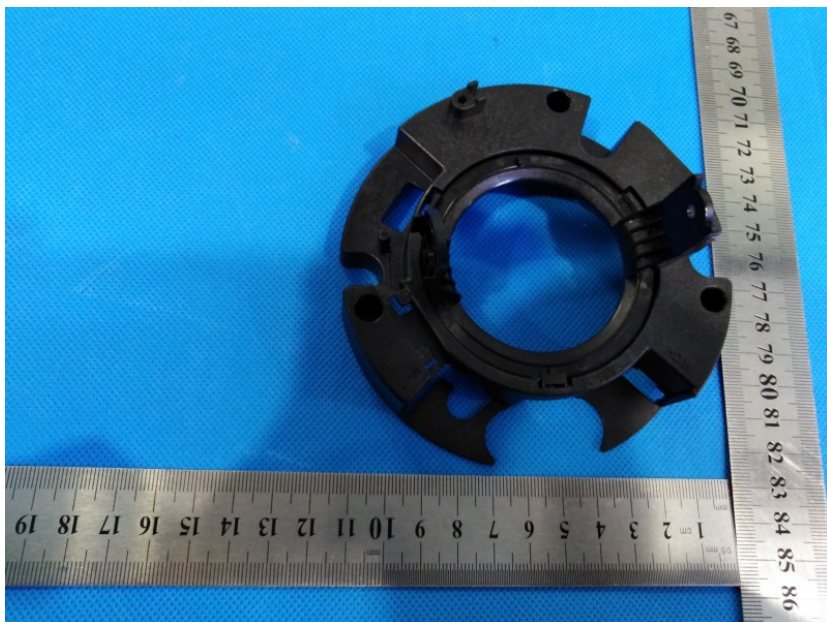

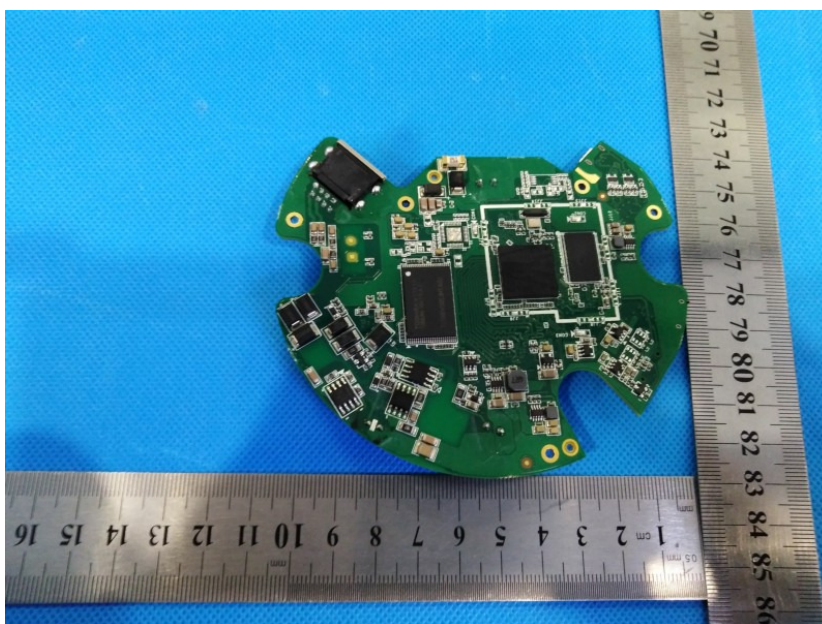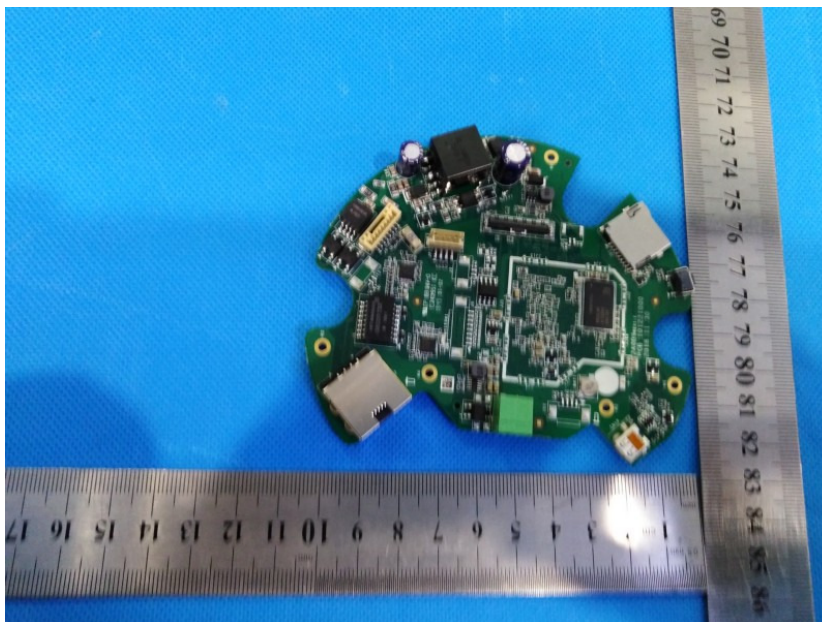

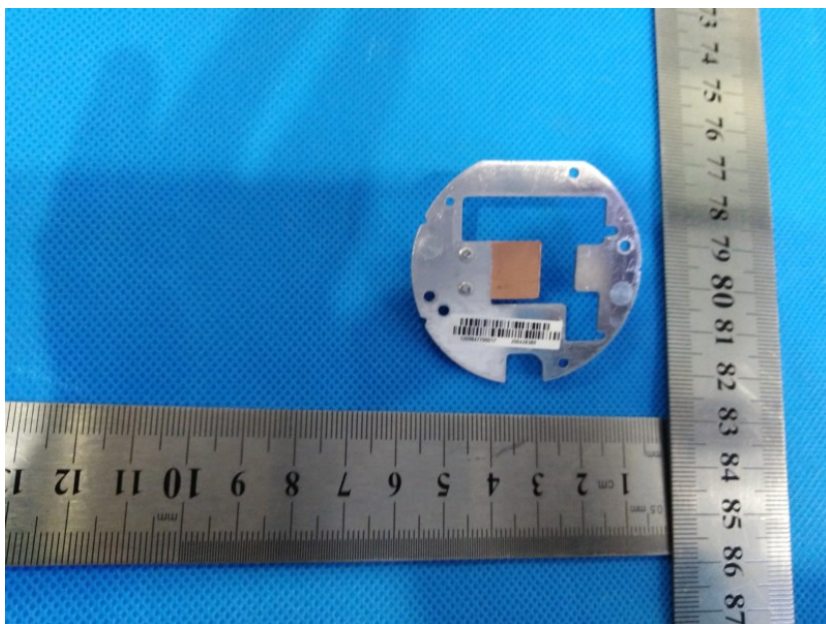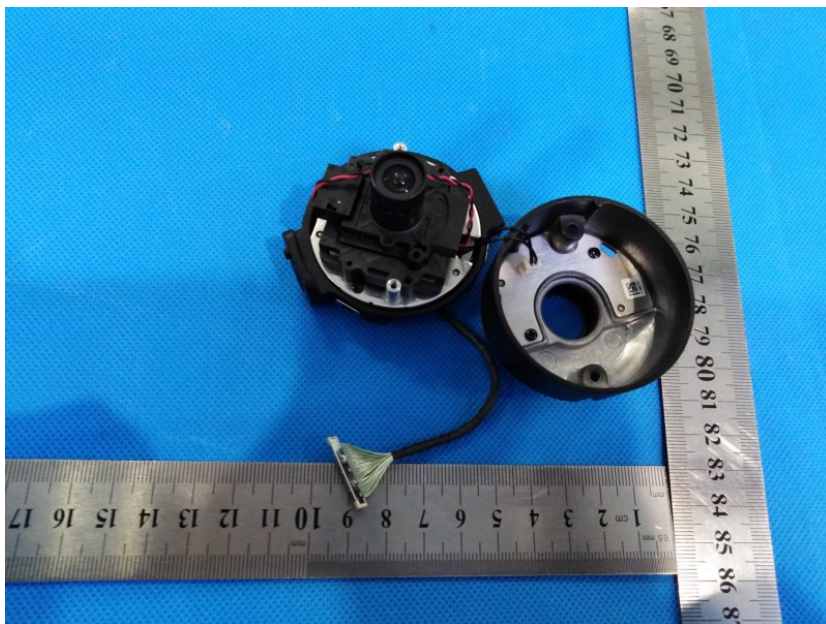

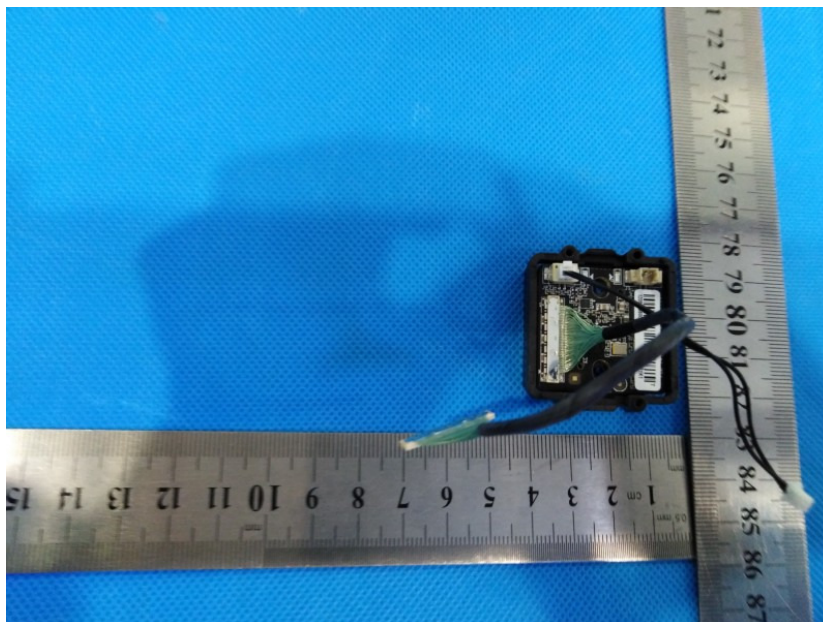

--End of the Report--