


Two Standalone Terminals Connect to One Lock

Operation Process

- 1) Wiring for standalone terminal.
- 2) Edit permissions.
- 3) Test.

Operation Steps:

1. Connect two terminals as below picture ;

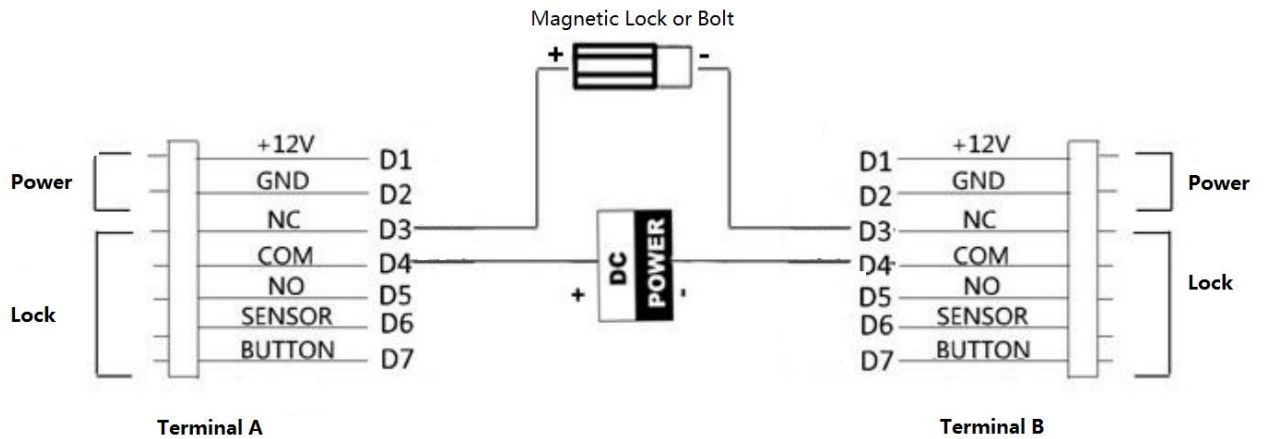

2. Add user data from local or sync from iVMS-4200 client software to two terminals ;
3. Swipe card on both terminals and check if the door can open normally.

Suitable Models:

| Model | Description |
|-----------------------|--|
| DS-K1T105 | Standalone Access Control Terminal |
| DS-K1T201 | Standalone Access Control Terminal |
| DS-K1T8003 | Standalone Access Control Terminal |
| DS-K1T804 | Standalone Access Control Terminal |
| DS-K1T604/605/606/607 | Face Recognition Access Control Terminal |