

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	1 of 6

Preparation

1. Second generation AcuSense camera(-SL models).
2. Custom audio with .wav format sampling rate as 8 KHz.
3. Up to 3 custom audios can be uploaded.

How to Upload Custom Sound of Audible Alarm

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	2 of 6

1. Website upload

1) Find uploading page on web

Configuration---Event---Basic Event---Audible Alarm Output.

The screenshot shows the Hikvision web interface for configuring the Audible Alarm Output. The 'Configuration' menu is active, and the 'Audible Alarm Output' sub-menu is selected. The 'Sound Type' is set to 'Custom Audio'. The 'Custom Audio' section has a 'Select File' button, 'Test', 'Download', and 'Add' buttons. The 'Alarm Times' is set to 5. The 'Sound Volume' is set to 100. The 'Arming Schedule' section shows a calendar grid with blue bars indicating the alarm is active from 00:00 to 24:00 for all days of the week. A 'Save' button is visible at the bottom.

2) Select sound type.

The screenshot shows the Hikvision web interface for configuring the Audible Alarm Output. The 'Sound Type' dropdown menu is open, showing 'Warning Prompt' and 'Custom Audio' options. The 'Custom Audio' option is highlighted with a red box. The 'Arming Schedule' section shows a calendar grid with blue bars indicating the alarm is active from 00:00 to 24:00 for all days of the week. A 'Save' button is visible at the bottom.

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	3 of 6

3) Import custom audio file.

Click Add, then upload a .wav **mono sound** audio file with the size smaller than **512 KB** and sampling rate as **8 KHz**.

If audio do not meet above requirements, it will prompt Uploading failed.

The screenshot shows the Hikvision web interface for configuring the Audible Alarm Output. The 'Configuration' tab is active, and the 'Audible Alarm Output' sub-tab is selected. The 'Sound Type' is set to 'Custom Audio'. The 'Custom Audio' field has a 'Select File' button and an 'Add' button (highlighted with a red box). The 'Alarm Times' is set to 5, and the 'Sound Volume' is set to 100. Below these fields is the 'Arming Schedule' section, which includes a 'Delete' button and a 'Delete All' button. The schedule is represented by a grid with days of the week (Mon-Sun) and time slots (0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24). All time slots are currently filled with blue bars, indicating that the alarm is active throughout the day. A 'Save' button is located at the bottom of the configuration area.

The screenshot shows the 'Upload Custom Audio' dialog box. It contains the following fields and buttons:

- Custom Audio:** A text input field containing the filename '출입금지구역입니다2.wav' and a 'Browse' button. A green checkmark is visible to the right of the field.
- Instructions:** A message icon followed by the text: 'Upload a .wav mono sound audio file with the size smaller than 512 KB and sampling rate as 8 KHz.'
- Audio Name:** A text input field containing the name 'Custom1' and a green checkmark to its right.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom right.

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	4 of 6

4) Test.

Save all settings and click Test, if the audio can play normally, it means succeed.

The screenshot shows the 'Audible Alarm Output' configuration page. The 'Sound Type' is set to 'Custom Audio' and 'Custom Audio' is set to 'Custom1'. The 'Test' button is highlighted with a red box. The 'Alarm Times' is set to 5. The 'Sound Volume' is set to 100. The 'Arming Schedule' section shows a 24-hour clock for each day of the week with blue bars indicating the alarm is active from 0 to 24 hours.

5) Up to three custom audios can be uploaded.


The "Add" button will turn gray if upload more than three custom audios.

The screenshot shows the 'Audible Alarm Output' configuration page. The 'Sound Type' is set to 'Custom Audio' and 'Custom Audio' is set to 'Custom1'. The 'Test' button is highlighted with a red box. The 'Add' button is also highlighted with a red box. The 'Alarm Times' is set to 5. The 'Sound Volume' is set to 100. The 'Arming Schedule' section shows a 24-hour clock for each day of the week with blue bars indicating the alarm is active from 0 to 24 hours.

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	5 of 6


2. Hik-Connect upload

1) Add the camera to HC and click "Settings".

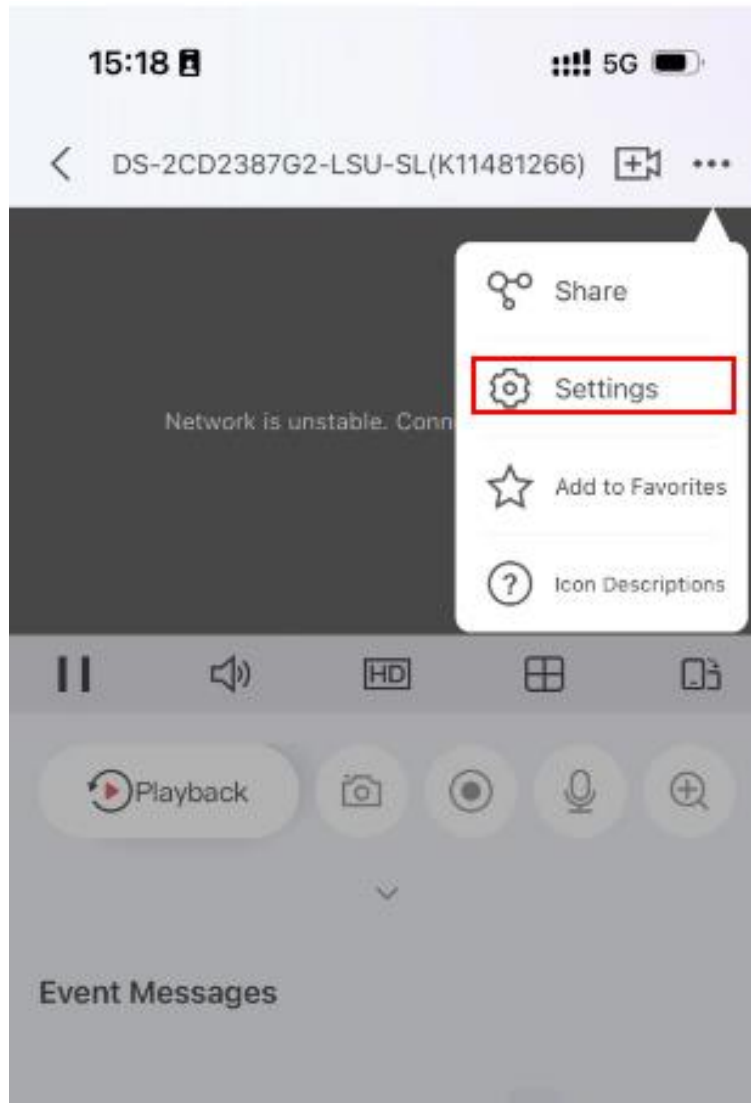


2) Go to the Settings page, find and click "Custom Audio".

Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	6 of 6

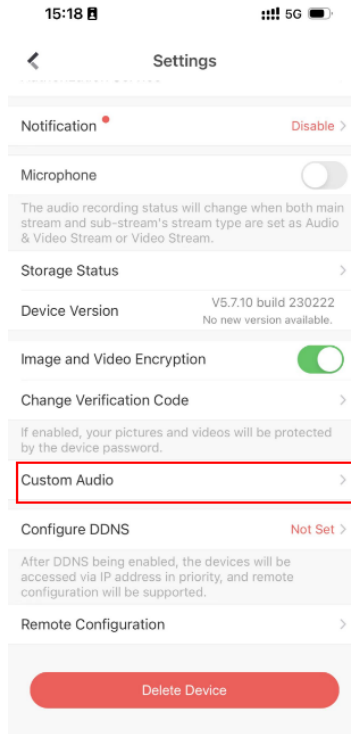


3) Choose the camera channel and click “Next”.

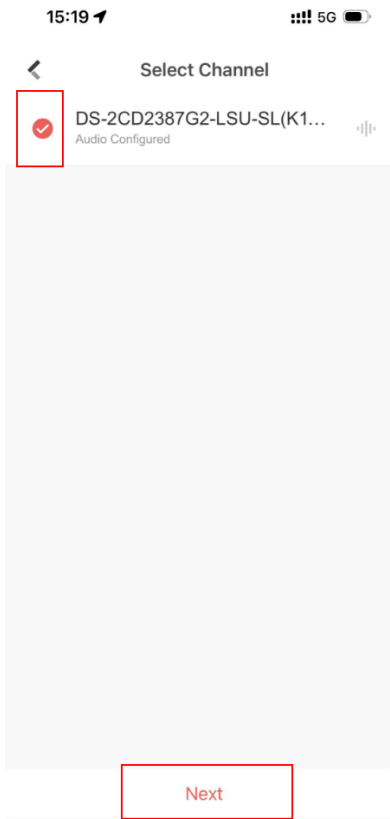


Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	7 of 6

- 4) Go to the next page, you can find the custom audios that have already recorded. If you want to upload the new custom audio, click “Settings”.

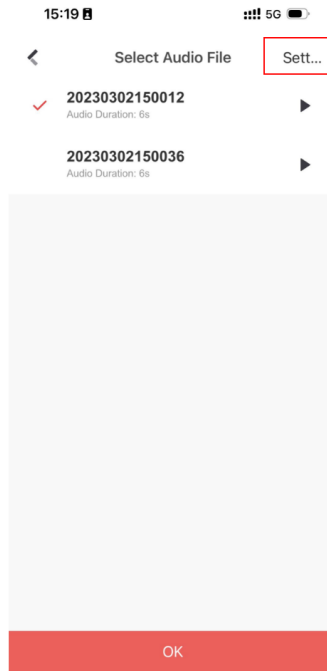


- 5) In this page, click “Start Recording” to record your own audio.

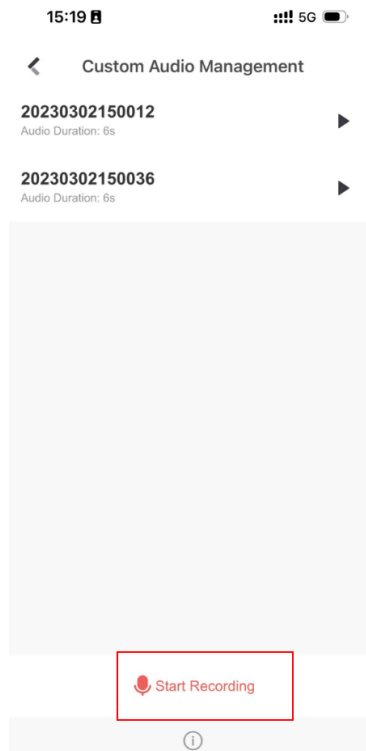


Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	8 of 6

6) Record your own audio and input the unique name.

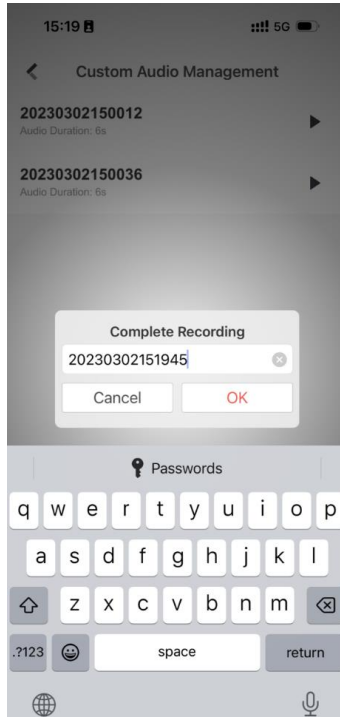


7) Choose the right audio and click "OK".

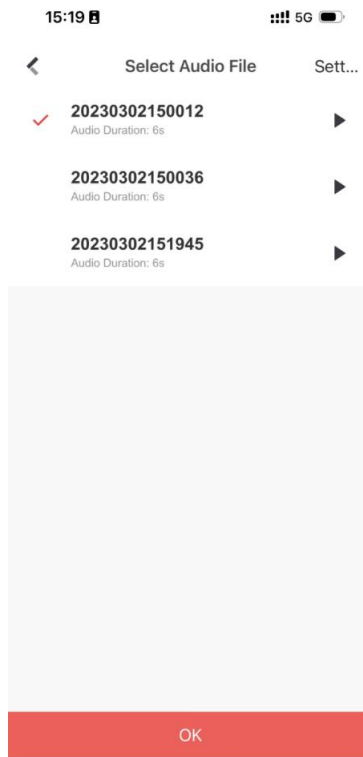


Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	9 of 6

8) By the way, you can handle the custom audio in “Me-Settings-Custom Audio Management”.

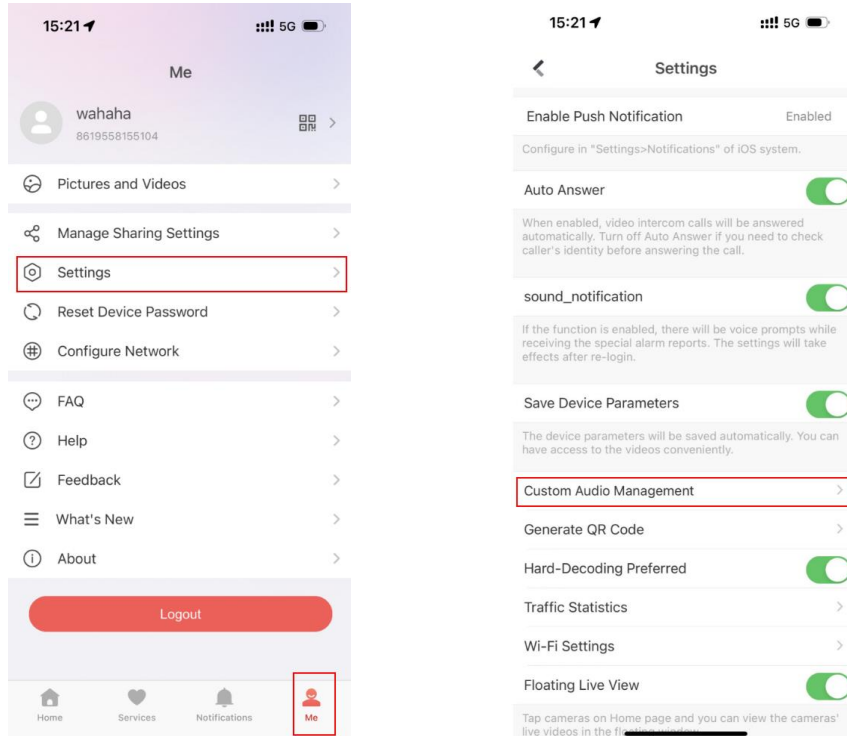

9) You can record new audio, change the name of audio and delete your audio as you wish.

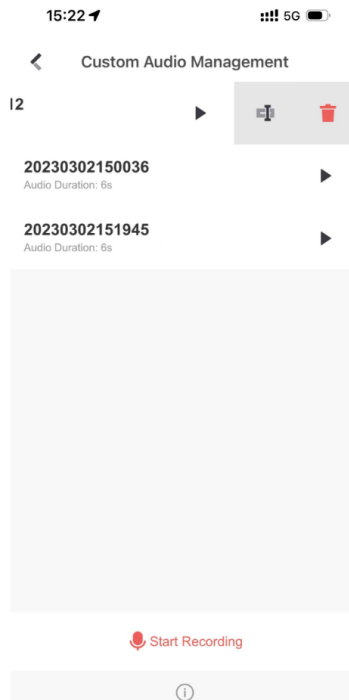



Title:	How to Upload Custom Sound of Audible Alarm	Version:	V2.0	Date:	03/01/2023
Product:	IP Camera			Page:	10 of 6

First Choice for Security Professionals
***HIKVISION* Technical Support**